



BRIEF INFORMATION

66 mm Premium lights

- Striking design
- Extremely light weight
- Trailblazing light output

PRODUCT FEATURES


An all-new design was developed for the light model series. As the lighting technology was being designed, an attractive appearance was also realised in addition to an exceptional, homogeneous signal image. The reflector has a high-quality facet appearance. The lens is clear and pattern-free.

During the light development process, we made sure to achieve the shortest possible installation depth. It measures 80 mm. The bulb holder has a 90-degree angle to minimise the installation depth required. The seal is implemented by way of a circumferential O-seal. The light housing is made from high-temperature resistant APEC plastic. The light is particularly well protected against penetration by elementary water. Ventilation is via a GORETEX[®] diaphragm.

Product benefits:

- Stylish, contemporary clear glass design, suitable for current main and auxiliary headlamps.
- Extremely light weight.
- Installation at the rear or front (with optional adapter ring).
- Can be mounted behind cover plates due to optimised light output.
- Combined tail light/stop light available.
- Direction indicator and position lights also available for SAE applications.
- Water-tight bulb holder.
- Two or three-pole K-Jetronic plug connection for simplified electrical connection.

INSTALLATION OPTIONS

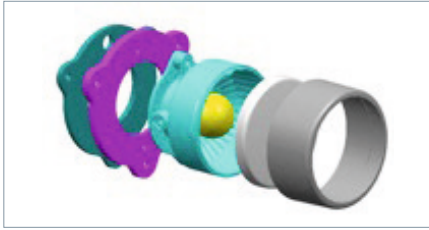

Design of the light with decorative ring and optional screw-down holder for installation at the front

Fastening from the rear or the front:

The bracket concept allows the lights to be fastened from the rear. The screw domes are within the light diameter. If installation at the front is required, the customer can be provided with two adapters as an option. One bracket can be used to fasten the light at the front but outside the housing diameter. The bracket comes with a foam seal. Two PT screws (4 x 12) are used to fasten the adapter.



Snap holder for installation at the front, without screws

Snap holder for installation at the front:


An additional bracket allows the lights to engage in the designated installation openings. Refer to the Catia illustrations for details on the installation situation.



Macro reflex reflector

Reflex reflector:

A suitable reflex reflector module is also available for the lights. This module is a macro reflex reflector. The reflector comes with special optics that reflect incoming light back where it came from. The benefit of this technology is a modern appearance that is very suitable for clear-lens lights. All accessory and bracket components for the lights can also be used for the reflex reflector.

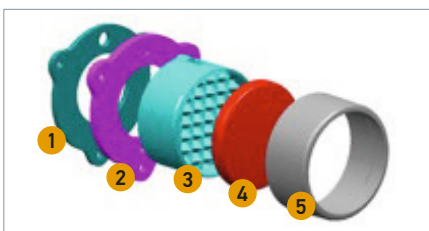

Design of the reflex reflector with decorative ring (accessory) and screw-down holder (accessory) for installation at the front

1. Seal (optional)
2. Adapter ring (optional)
3. Module
4. Lens (welded)
5. Decorative ring (optional)



TECHNICAL DETAILS


HALOGEN

Technical data


Operating voltage / Rated voltage	12 V or 24 V
Functions	Position light Direction indicator Stop light Tail light Brake reflector
Type approval	ECE/SAE/CCC
Housing	APEC plastic
Connector	2-pole

Dimensional sketch


Forward functions

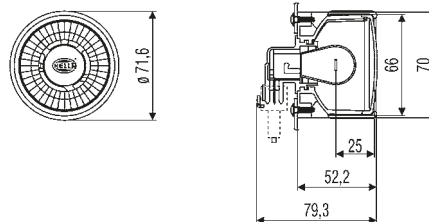

Rearward functions

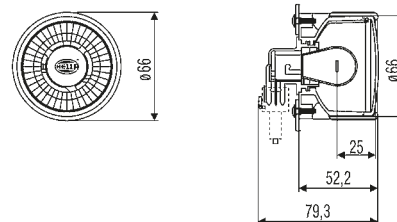

Macro reflex reflector



ACCESSORIES

HALOGEN

Product Picture	Part number	Description
-----------------	-------------	-------------

Design ring

Suitable for 66 mm light modules with $\varnothing 71.6$ mm (order number ... 009 001-... except LED versions), perfect high-gloss finish with one "click"



9HB 161 122-012 High-gloss chromium plated

9HB 161 122-007 Silver

9HB 164 168-002 Premium silver

Mounting



9XD 161 119-007 Frontal for rear combination lamps ($\varnothing 66$ mm); direct installation as well as installation in ring module, black

Locking ring



8HG 162 530-002 For front installation, silver

Connector









8JD 156 150-807 Connector set, 2-pole, grey

8JD 162 581-802 Connector set, 3-pole, grey (without illustration)

8JA 179 631-002 Connector housing (250 units) (without illustration)

RANGE OVERVIEW

HALOGEN

Product Picture	Part number	Description	Type approval	Type approval number	Lens colour	Bulb
Forward functions						
	2BA 009 001-071	Direction indicator	ECE/CCC	CCCA047950	Clear	PY 21 W
	2BA 009 001-077					
	2BA 009 001-201	Direction indicator, SilverVision	ECE	1D 1aD 1bD E4 01 6546	Clear	PY 21 W SV
	2BA 009 001-091	Direction indicator	SAE	DOT24 cp	Clear	1156A 24CP
	2BA 009 001-097					
	2PF 009 001-081	Position light	ECE/SAE	TV39 SAE P03 DOT 32 / 3cp	Clear	P 21 / 5 W
2PF 009 001-087						
Rearward functions						
	2BA 009 001-001	Direction indicator	ECE	2aD E4 01 6546	Grey transparent	PY 21 W
	2BA 009 001-007					
	2ZR 009 001-011	Auxiliary reversing light	ECE/SAE	TR38 SAE R07 DOT	Grey transparent	P21 W
	2ZR 009 001-017					
	2BA 009 001-191	Direction indicator, SilverVision	ECE	2aD E4 01 6546	Grey transparent	PY 21 W SV
	2SA 009 001-041	Tail light	ECE	RD E4 02 7613	Red	P21 / 5 W
	2SA 009 001-047					
	2DA 009 001-051	Stop light	ECE	S1D E4 02 7613	Red	P21 W
	2DA 009 001-057					
	2SB 009 001-061	Tail light/stop light	ECE	RD-S1D E4 02 7613	Red	P21 / 5 W
	2SB 009 001-067					
2NE 009 001-021	Fog-reverse lamp	ECE/SAE/ CCC	CCC A047950 TH 141 SAE F2 07	Red	H21 W	
2NE 009 001-027						
	8RA 009 001-031	Macro reflex reflector	ECE/SAE/ CCC	CCC A047950 TH 142 SAE A07 DOT	Red	-
	8RA 009 001-037					

TECHNICAL DETAILS


LED

Technical data

Operating voltage / Rated voltage	Multivolt
Functions	Position light Direction indicator Stop light Fog-reverse lamp Reflex reflectors
Type approval	ECE/SAE/CCC
Housing	APEC plastic
Connector	2-pole/3-pole


Dimensional sketch

Forward functions




Rearward functions

... 009 001-...



... 009 362-...

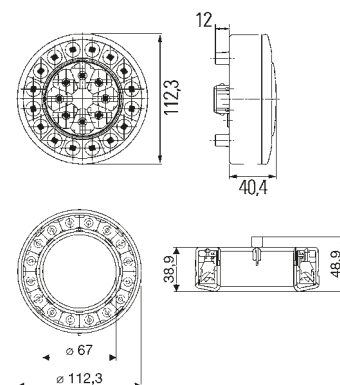

ACCESSORIES

LED

Product Picture	Part number	Description
-----------------	-------------	-------------

Design ring, Ø 118 mm

Suitable for ring module... 009 362-... Perfect high-gloss finish with one "click"



9HB 163 085-012 High-gloss chromium plated

9HB 163 085-001 Silver

Connector

Suitable for ... 009 001 ...

2JD 156 150-807 Mating connector, 2-pole

2JD 162 581-802 Mating connector, 3-pole








Mounting



9XD 161 119-007 For installing LED lamps or the reflex reflector in the ring module Series ... 009 362-..., black

RANGE OVERVIEW

LED

Product Picture	Part number	Description	Type approval	Type approval number	Lens colour
Forward functions					
	2PF 009 001-421	Position light, for installation, with 12 LEDs	ECE/SAE	01  12390 2a	Clear
Rearward functions					
	2SB 009 001-401	Tail light and stop light, 12 LEDs and AMP connector	ECE/SAE	01  12390 2a THK245 SAE 11 DOT SAE TV 45 P08 DOT	Clear
	2SB 009 001-411	Tail light, without impulse, 12 LEDs and AMP connector			
	2BA 009 001-431	Tail light, with impulse, 12 LEDs and AMP connector			
	2SD 009 362-201	Combination LED rear light, stop light and direction indicator, for rear installation, with 24 red LEDs, compatible with light model series ... 009 362-..., ... 009 001-...	SAE	THK 228 SAE	Clear
	2SB 009 362-041	Stop light, LED ring modules	ECE	RD S1D  02 7747	Red
	2SB 009 362-021	Stop light, LED ring modules			Clear
	8RA 009 362-001	Reflex reflector, LED ring modules			Red