

Dacia Logan - The charging malfunction indicator light is lit | HELLA

Dacia

Logan

Model year: 2006 to 2011

All vehicles with the engine codes

K9K, K7J, K4M, K7M

If a customer complains about the above error,

it could be caused by a faulty belt pulley on the generator. The customer might also complain about strange noises coming from the V-ribbed belts and the engine. In this case the belt pulley must be checked for damage (see figs 1 and 2) and the generator housing must be inspected. If the belt pulley is damaged, it must be replaced.

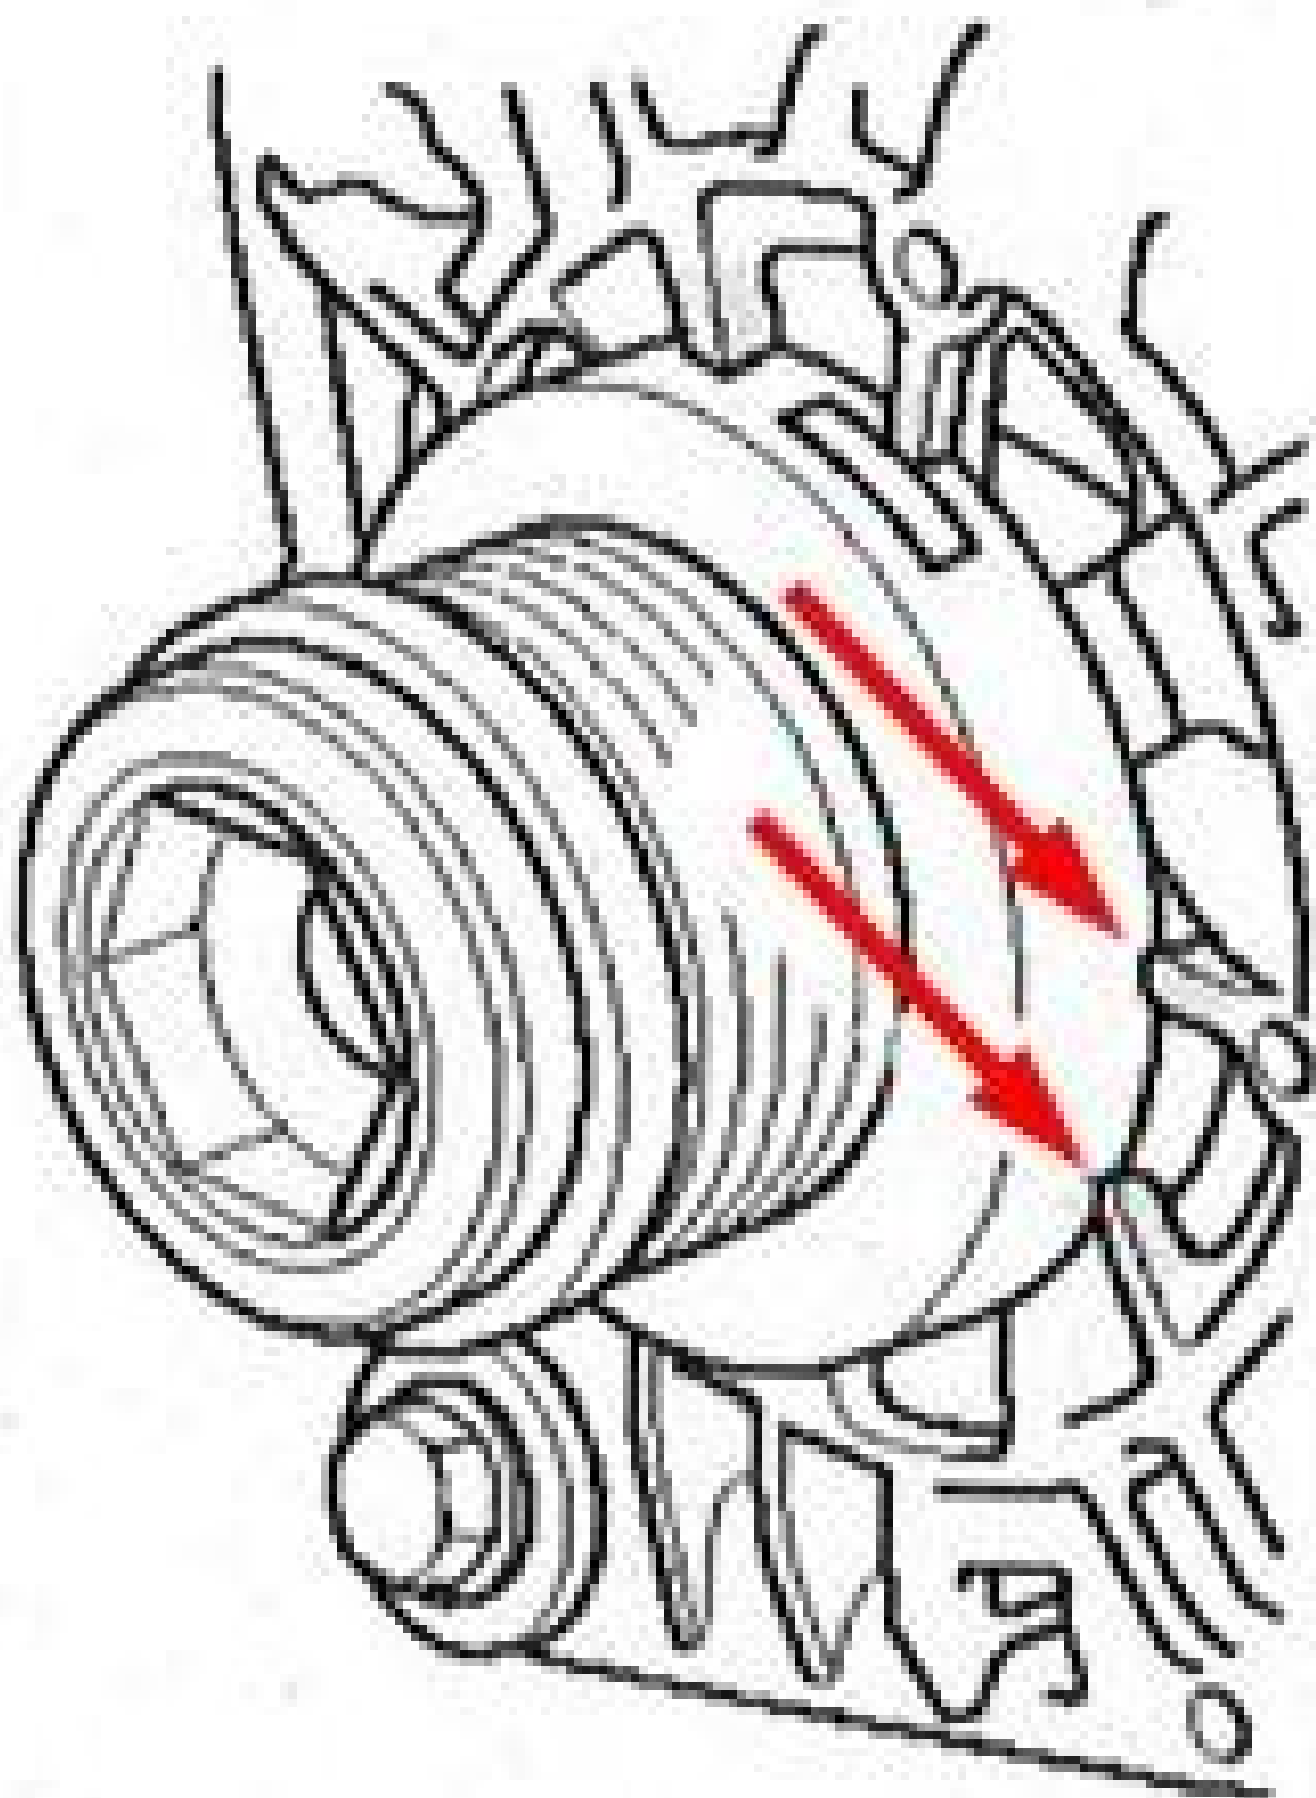


Fig. 1

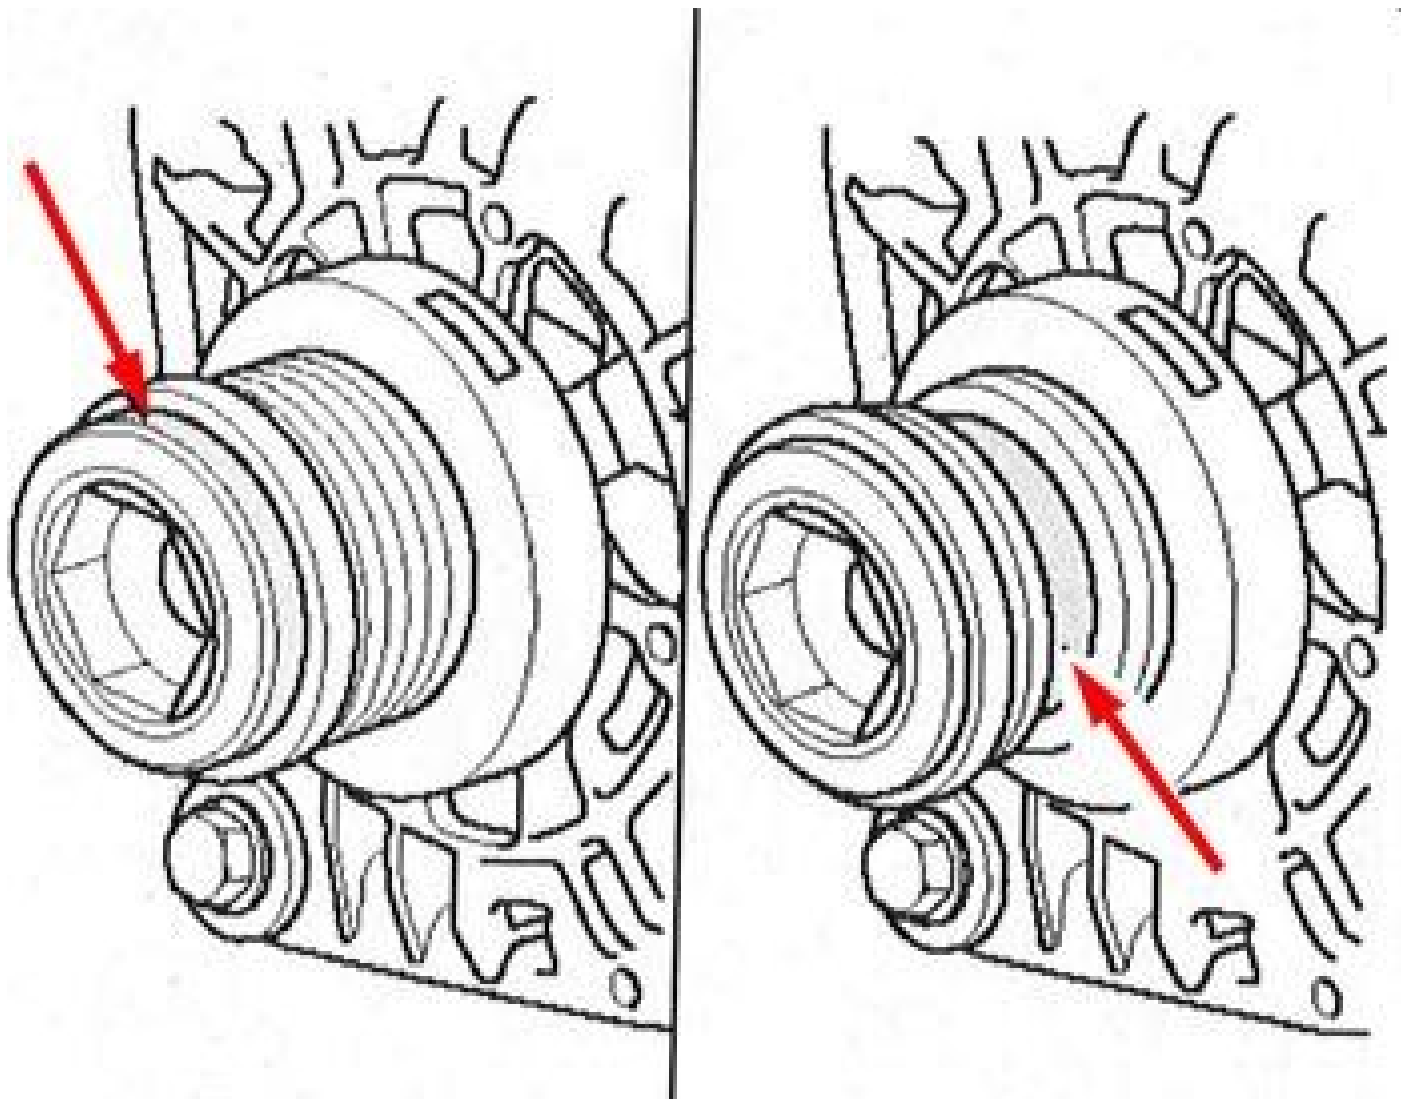


Fig. 2