



Ford Ranger - jerking during acceleration and engine control lamp on

Data sheet	
Manufacturer	Ford
Vehicle model	Ranger
Engine	3.0 TDCI
Engine code	WEC
Year of manufacture	2006 - 2011
Symptoms	Vehicle jerks during acceleration Engine control lamp lights up
Error code	P0201

Important safety note

Vehicle judders and jerks during acceleration: engine control lamp is on and error code P0201 shows up

If the above-mentioned set of error symptoms is detected in connection with error code P0201 ([Fig. 1](#)), a possible cause may be a contact fault on the multi-connectors on the injection system harness.

The engine vibrations can bring about poor contact with the connectors of the injectors.


If no other defects have been found during the fault diagnosis on the injection system, the harness and the connectors should be checked and, if necessary, repaired or replaced ([Fig. 2](#)).

IMPORTANT

This defect may also occur in other models with the same type of engine.

Please follow the repair instructions from the vehicle manufacturer when carrying out such work.



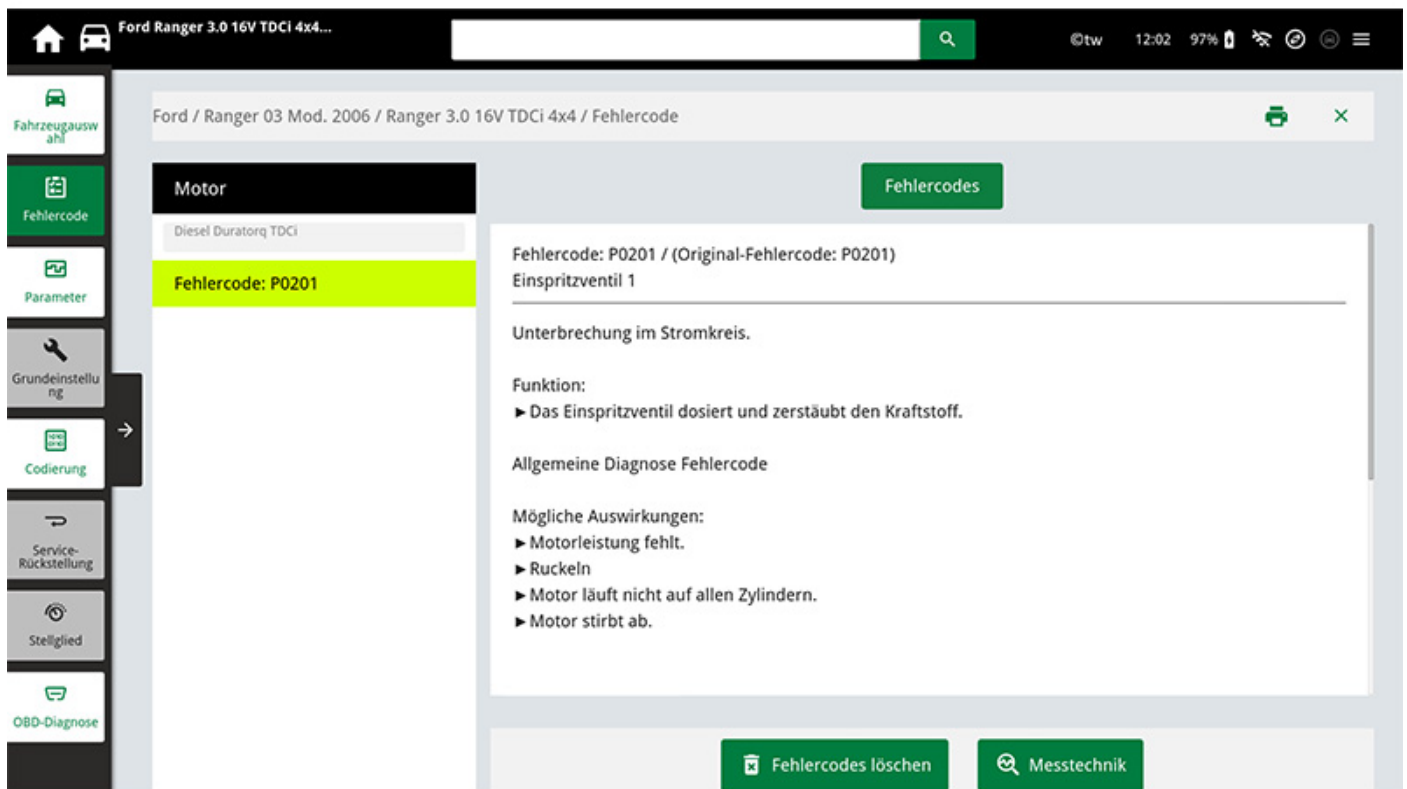

Reprinting, distribution, reproduction, exploitation in any form or disclosure of the contents of this document, even in part, is prohibited without our express, written approval; indication of the document source is also required. The schematic illustrations, pictures and descriptions serve only for the purposes of explanation and representation of the instructions and cannot be used as a basis for installation or assembly work. All rights reserved.