

Optimum Close-range Illumination


Lighting technology:

Together with the special honeycomb in the lens, the parabolic reflector allows homogeneous illumination of the close-range working space. An H3 bulb is used as the light source (not included in the scope of supply of all versions). The worklight can be used with both 12 V and 24 V vehicle-electric-system voltages (depending on the bulb).

Housing:

The black housing of this sturdy worklight is made of glass-fibre-reinforced plastic. To protect the lens, the housing has a protruding edge at the front. Together with the swivel base, the handle makes it easier to adjust the worklight, such that the working space can be optimally illuminated. The bracket allows stable four-point fastening of the worklight. Sealing of the cable duct is carried out via a grommet.

Depending on the version, the Matador offers additional advantages such as rotary switch (in the case of versions -001 and -031) or protective grille (in the case of versions -031 and -051). Item 1G4 003 470-141 Matador is suitable only for upright mounting. Power connection is via an easily detachable pipe-socket fastening which fits \varnothing 24 mm socket pipes for beacons.

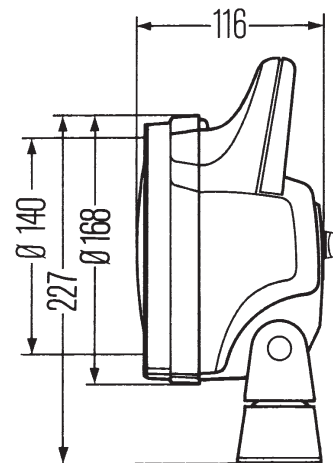

Matador

Technical Data Matador

Rated voltage (U _N):	12V	24V
Recommended inclination angle:	20°-30°	
Bulb (not included in the scope of supply):	H3	
Light transmittance:	\varnothing 140mm	
Watts:	35-55 W	70 W
Housing	Glass-fibre reinforced plastic	
Protective category:	IP5K4K	

Part Number:


Matador 1G4 003 470-...

Accessories and Spare Parts

Bulbs	12V	55 W	8GH 002 090-133
	12V	35 W	8GH 002 090-271
	24V	70 W	8GH 002 090-251



Part Number: 1G4 003 470 ...	-001	-011	-031	-051	-141
Ground illumination	■	■	■	■	■
12 V or 24 V bulb	12/24V	12/24V	12/24V	12/24V	24V
Suitable for 12 V & 24 V	■	■	■	■	
H3 bulb	■	■	■	■	■
Upright mounting	■	■	■	■	■
Pendant mounting	■	■	■	■	
IP 5K4K	■	■	■	■	■
U-bracket	■	■	■	■	
Swivel base	■	■	■	■	
Pipe-socket fastening					■
Glass lens	■	■	■	■	■
Protective grille			■	■	■
Handle	■	■	■	■	■
Sturdy housing	■	■	■	■	■
Switch	■		■		
Cable entry with grommet	■	■	■	■	

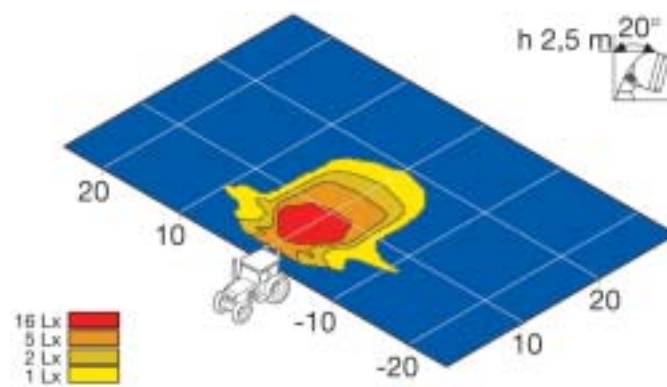

Ground illumination 20°