

Bilge Pumps

Bilge Pumps


Hella Marine bilge pumps are completely submersible, vibration and maintenance free. Removable base plate allows cleaning of the intake chamber and also serves as a mounting plate.

for reliable operation and safety Hella marine recommends that the following bilge pump rules be followed -

- Use to pump bilge water only.
- Do not leave permanently submerged in water contaminated with oils or cleaning products.
- Test regularly.
- Clean the strainer regularly.
- Do not use with unreliable float switches.
- Do not use to compensate for a leaking vessel.
- Do not use as continuous duty live bait tank pumps.

1500 l/hr / 400 GPH Bilge Pump

Pumping Capacity	1500 l/h / 400 GPH
Voltage	12V DC
Delivery Head	4.2m
Power Consumption	3.5A
Outlet Hose Internal Diameter	13.5mm
Outlet Hose External Diameter	20.0mm

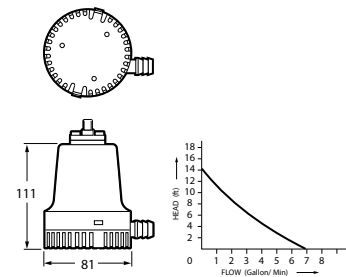


1500 l/hr / 400 GPH Bilge Pump

Part Number
2730



2300 l/hr / 600 GPH Bilge Pump

Pumping Capacity	2300 l/h / 600 GPH
Voltage	12V DC
Delivery Head	5m
Power Consumption	5A
Outlet Hose Internal Diameter	13.5mm
Outlet Hose External Diameter	20.0mm

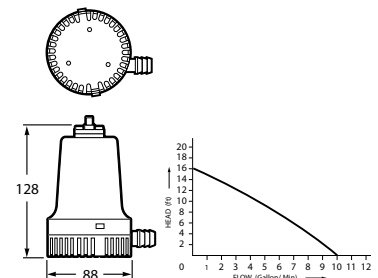


2300 l/hr / 600 GPH Bilge Pump

Part Number
2731



12V 6500 l/hr / 1750 GPH Bilge Pump

Pumping Capacity	6500 l/h / 1750 GPH
Voltage	12V DC
Delivery Head	4m
Power Consumption	10A
Outlet Hose Internal Diameter	25.0mm
Outlet hose External Diameter	30.0mm

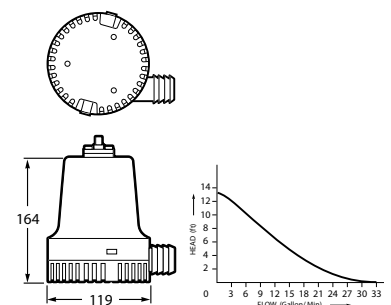

12V 6500 l/hr / 1750 GPH Bilge Pump

Part Number
2732



24V 6500 l/hr / 1750 GPH Bilge Pump

Pumping Capacity	6500 l/h / 1750 GPH
Delivery Head	4m
Voltage	24V DC
Power Consumption	6A
Outlet Hose Internal Diameter	25.0mm
Outlet Hose External Diameter	30.0mm

24V 6500 l/hr / 1750 GPH Bilge Pump

Part Number
2733