

DuraLed® STOP/TAIL/REAR TURN SIGNAL LAMP



Part Number 2SB 959 060-301 (Single Pack), 2SB 959 060-307 (Bulk Pack)

Features include:

- DuraLed® = Ultra long life
- DuraLed® = **Multivolt** capable (9-33 volts)
- DuraLed® = Ultra fast response time
- DuraLed® = Reverse polarity protected
- DuraLed® = Fully sealed against dust and water
- DuraLed® = Low power consumption
- DuraLed® = Compensates for voltage drop on long vehicles
- DuraLed® = Withstands most vibration and mechanical shock applications
- DuraLed® = Manufactured from polycarbonate to withstand high impact forces

Regulatory Compliance

This lamp identified by lens marking SAE S2 T2 I6 99 DOT and red colour was manufactured to comply with the applicable test requirements of FMVSS No.108.



Lamp Mounting Instructions and FMVSS No.108 Installation Requirements

- Lamp mounting surface must be vertical to the ground, and at right angles to the longitudinal axis of the vehicle.
- Lamp must be visible from 45° inboard and 80° outboard, as well as from 15° above and below the horizontal axis.
- Lamp is approved to be mounted horizontally or vertically.


Please refer to FMVSS No.108, Table II for more details.

Note: Lamp does not include a reflex reflector.

Mounting Options



General Dimensions (in millimeters)

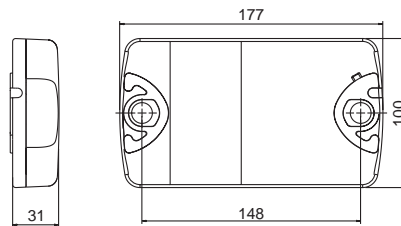

Screw Cap Removal

Carefully insert a small flat blade screwdriver between the cap and lens and pull towards the lens, the cap will clip off. To install the cap push in by hand until the top is flush with the lens.

Surface Mounting


Drill two holes up to 6.5 Ømm at 148mm centres. 6mm Ø screws or bolts are recommended to mount the lamp using the mounting bushes provided. Lamp should be mounted on a flat surface.

- If passing the cable through a hole, ensure there are no sharp edges to cut or chafe the cable. Alternatively, cable can be routed through the end of the base.
- Connect cable as per chart below.
- Try to keep the cable length as long as possible, preferably join the cable inside a sealed cable junction box.
- Clip the screw caps on securely until flush with the lamp surface.

Note: When mounting lamp units side by side allow a gap of 5mm to ensure screw cap removal.

Wiring: Note: Lamp is polarity conscious. The reversal of the polarity will not damage this product but will inhibit its function.

Colour	Connect to	Power Consumption
White	Earth (-)	-
Red	Stop/Turn (+)	9 watts
Brown	Tail (+)	2 watts
Blue	Park (+)	2 watts

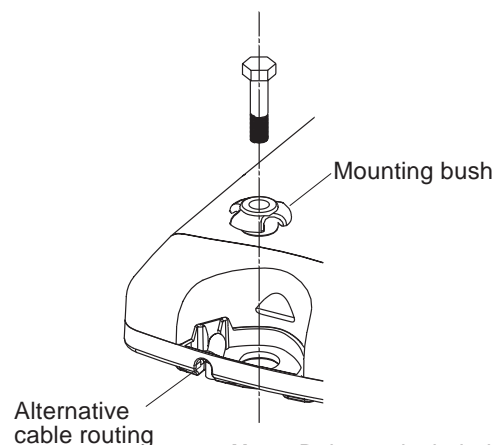

Note: Bolts not included

Warranty: Hella branded products are warranted against manufacturing or material defects.

Lamp is sealed and does not have any serviceable parts inside, opening the lamp will invalidate warranty.

For general comments about the product please contact us on E-mail at techfeedback@hella.co.nz