


Xenon Gas Discharge Lamps

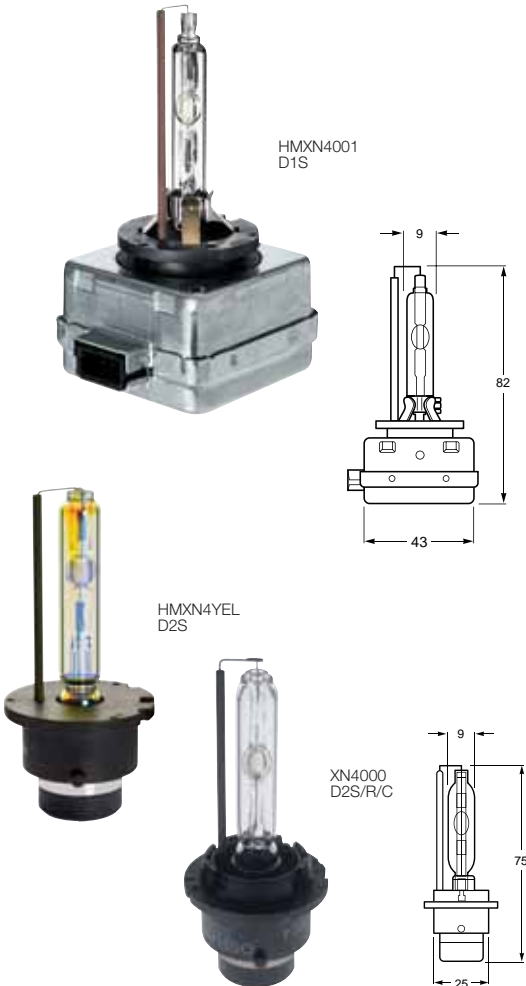

	HMXN4001	XN4000	HMXN4YEL
Comparison	D1S	D2S	D2S (Yellow)
Rated Wattage	35W	35W	33W
Luminous Flux	3200lm	3200lm	3000lm
Luminous Efficacy	91lm/W	91lm/W	91lm/W
Colour Temperature	4250°K	4250°K	3351°K @ 575nm
Average Luminance	6500*cd/cm ²	6500*cd/cm ²	6100*cd/cm ²
Lamp Life	B3 Tc	1500h 3000h	2000h 3000h
Filament/arc length	4.2mm	4.2mm	4.2mm
Note	Replace Lamps only with same type. D1S lamps must be used in Oval 100FF Xenon work lamps. D2S lamps must be used in all other Xenon work lamps in this catalogue.		

Part No.	Type	Voltage	Wattage	Base	ADR 51/00 Category	UV Cut
HMXN4001	D1S	85	35	PK32d-2	D1S	•
XN4000	D2S	85	35	P32d-2	D2S	•
HMXN4YEL	D2S	85	35	P32d-2	-	-

Xenon Gas Discharge Flash Tube



Part No.	Voltage	Wattage	Base	ADR 51/00 Category	UV Cut
XENON GAS DISCHARGE GLOBES SUITABLE FOR EMERGENCY FLASHER, REVOLVING AND/OR STROBE LAMPS.					
XN6750	12-24	-	Circuit Board Plug-In	-	-

Note: Use this lamp for PulseRAY Xenon strobe warning beacons.

