



Ideas today for
the cars of tomorrow

Product News

Latest Additions to the Hella Australia Range


01/10

New Featherlight™ Daytime Running Lamps

Maximise the advantages of LED lighting

Hella has launched a new ultra efficient and lightweight LED Daytime Running Lamp (DRL) offering motorists maximum visibility and superior safety without impacting on the environment.

Hella Featherlight™ LED Daytime Running Lamps produce a highly effective white signal light that is specifically designed to increase the vehicle's visibility in road traffic during the day and to ensure early recognition by other road users. The lamps switch on automatically when the engine is started and switch off when the main headlamps are activated or the engine is turned off.

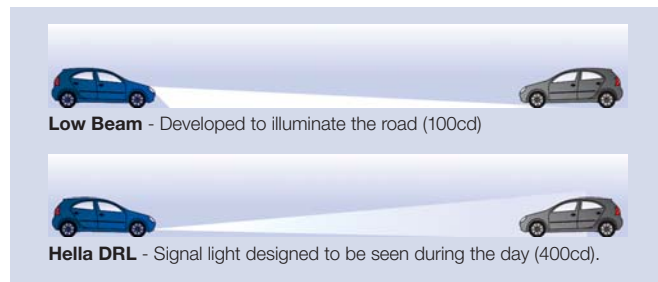

Featherlight™ 150 grams
Suitable for Mounting on Plastic Trim


Featherlight™ LED Daytime Running Lamps are equipped with 12 high-performance LEDs for superior light output in accordance with legal requirements and ultra-durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance, whilst weighing only 150 grams each.

In addition to minimal weight and maximum durability, Featherlight™ LED Daytime Running Lamps offer the benefit of ultra long service life and low power consumption. Whilst standard low beam headlamp systems consume an average of 110 watts adding as much as 0.2 litres/100km in fuel consumption, Featherlight™ LED Daytime Running Lamps offer the industry benchmark lowest energy consumption of less than 2 watts per lamp, offering a significant reduction of over 95% in additional fuel consumption and CO₂ emissions.

With its overall compact design and extreme lightweight of only 150 grams, Featherlight™ LED Daytime Running Lamps are easy to install and suitable for light plastic vehicle bumpers. Each lamp is completely sealed and designed to withstand harsh environmental conditions including long-term exposure to very high UV levels. Supplied with sturdy mounting bracket and three-pin AMP Superseal connector for universal retrofitting.

Key Features

- 12 high-performance LEDs for maximum visibility
- Industry benchmark lowest power consumption < 2W per lamp
- Ultra lightweight of only 150g
- Ultra-durable Grilamid® nylon lens
- Hassle-free installation (suitable for plastic trims)




:: LED Daytime Running Lamps

1004	Featherlight™ LED Daytime Running Lamp - 9-33V DC	
5617	Featherlight™ LED Daytime Running Lamp Kit - 9-33V DC	 
5617OE	Featherlight™ LED Daytime Running Lamp OE Kit - 9-33V DC	 




Description	Ultra light, universal LED Daytime Running Lamp (DRL) equipped with 12 x high-performance LEDs offering maximum visibility in road traffic during the day. Features lightweight housing and ultra-durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Overall weight of only 150 grams enables mounting on plastic trims. Automatically switches on when the engine is started and switches off when the main headlamps are activated or the engine is turned off. Kit includes 2 x lamps, 2 x universal mounting brackets, pre-assembled professional wiring harness and waterproof AMP Superseal connectors. OE Kit includes 2 x lamps complete with 2.5m three-core sheathed cable and 2 x universal mounting brackets.
Voltage	Multivolt™ (9-33V DC)
Wattage	<2W per lamp
Mounting	Upright or pendant. Universal mounting bracket included.
Lead Length	Single 0.5 metre with 3-pin AMP Superseal connector OE Kit 2.5 metres of three-core sheathed cable
Protection	Reverse polarity, spike and over voltage protection. Sealed against dust and water ingress.
ADR / ECE	Fully compliant with 3rd Edition ADR 76/00 Daytime Running Lamp (E24 87R-000002).

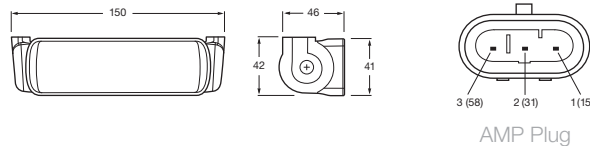

1005	Strip LED Safety Daylights™ - 12V DC	
1005-24V	Strip LED Safety Daylights™ - 24V DC	
5618	Strip LED Safety Daylights™ Kit - 12V DC	 
5618-24V	Strip LED Safety Daylights™ Kit - 24V DC	 



Description	Universal strip LED Daytime Running Lamp (DRL) equipped with 12 x high-performance LEDs for maximum visibility in road traffic during the day. Features slimline design and ultra-durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Fully sealed to withstand high pressure washing. Kits include 2 x lamps, change-over relay and connectors.
Wattage	2W per lamp
Mounting	Flush mount (screws and screw caps included)
Lead Length	2.5 metres of twin-core sheathed cable
Protection	Reverse polarity protected
ADR / ECE	Fully compliant with 3rd Edition ADR 76/00 Daytime Running Lamp (E24 87R-000001).

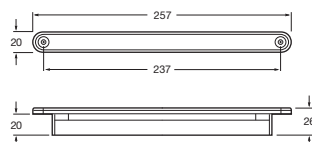

:: LED Front Direction Indicators

LED Front Direction Indicator/ Front Position/ Safety Daylights™ - 24V DC

ADR

2108-GMD24V

Description Compact, low profile LED Combination Front Direction Indicator/ Front Position/ Daytime Running Lamp specifically designed for commercial transport applications. Equipped with ultra-durable Grilamid® nylon lens for extreme impact, UV, chemical and stress resistance. Direction indicator optic appears clear until illuminated. The white Safety Daylights™ function dims automatically while the indicator is active as per ECE regulations.

Voltage 24V DC

Wattage Front Indicator 4W
Front Position 1W
Safety Daylights™ 4W

Mounting Flush mount (incorporates single stainless steel mounting bolt)

Lead Length 2.5 metres of four-core sheathed cable

Protection Reverse polarity, spike and over voltage protection.
Fully sealed against dust and moisture to IP6K6 and IP6K7.

ADR / ECE Fully compliant with 3rd Edition ADR 6/00 Cat.1 Front Direction Indicator Lamp, 49/00 Front Position Lamp and 76/00 Daytime Running Lamp (E24 5854).




Front Indicator



Front Position



Safety Daylights™

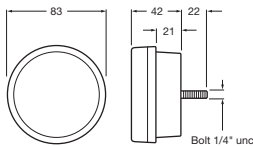

:: LED Interior Lamps

High Efficacy LED Interior Lamp - White - 12/24V DC

95970010

Description High intensity LED Interior Lamp with diffused optic for general area or interior lighting. Equipped with 12 x high efficacy LEDs for superior white light output rated at 200 lumen, the industry benchmark for lumen per watt efficacy. Fully sealed against dust and moisture ingress. Resistant to shock and vibration.


Voltage Dualvolt (12/24V DC)

Wattage 3W

Mounting Surface mount (mounting bushes included)

Lead Length 2.5 metres

Protection Reverse polarity and transient spike circuit protected.
Fully sealed against dust and moisture to IP6K6 and IP6K7.

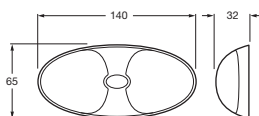

:: LED Interior Lamps



2648/25

ThinLITE LED Interior Lamp - 12V DC (Pack of 25)

Description Bulk pack version of universal, low profile LED Interior Lamp, Part No. 2648. Equipped with 10 x powerful white LEDs for optimum light distribution. Shock-resistant acrylic lens and sturdy ABS/PC housing ensure increased durability and long service life, even in extremely cold or humid environments.

Voltage 12V DC


Wattage 1.8W

Mounting Surface mount (screw caps included)

Lead Length 25 centimetres

Temperature Range -40° to +60°C

Protection Fully sealed against dust and moisture to IP6K9K.

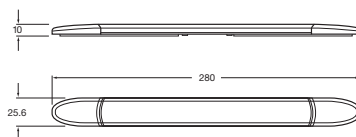

:: LED Signal Lamp Accessories



9.2105CLR.10

500 Series Screw Cap - Clear PC (Pack of 10)



9.2105.10

500 Series Screw Cap - Amber PC (Pack of 10)



9.2165.10

500 Series Screw Cap - Amber PMMA (Pack of 10)



9.2365.10

500 Series Screw Cap - Red PMMA (Pack of 10)

Description PC/PMMA screw caps to suit all 500 Series LED Signal Lamps.



**Ideas today for
the cars of tomorrow**

Hella Australia Pty Ltd
Southern Road,
Mentone, Victoria, 3194
P.O. Box 89, Mentone, 3194

Telephone: (03) 9581 9333
Facsimile: (03) 9585 2654
Email: custservice@ha.hella.com
Web: www.hella.com.au

Hella Customer Service 1800 061 729

Special note: The illustrations, information and specifications presented and referred to in this leaflet were correct at the date of printing. However, Hella reserves the right, subject to all applicable laws, at any time, at its discretion and without notice, to discontinue or change the specifications or the design of any product referred to herein. The data and suggested applications are given as a general guide only and users should independently evaluate the suitability of each product for any particular application.