






# **BRIEF INFORMATION**

Luminator auxiliary spotlight with LED-position light, Ref. 25





Upright mounting. Inclination angle: +/- 7°

### **DELIVERY SCOPE**

- Halogen spotlight with LED position light
- With cable set
- Attachment material
- Mounting instructions

## PRODUCT CHARACTERISTICS

- The ideal supplement for better light performance for trucks, off-road vehicles and SUVs.
- High-boost reflector for even and ideal illumination of the road thanks to the latest computer technology
- Clear real-glass lens
- 6 high-performance LEDs for position light
- Striking night-time design
- Sturdy metal casing made of die-cast zinc
- Visually striking high-shine chrome plating
- ECE type tested (E1)
- Suitable for H1 12 V / 55 W or H1 24 V / 70 W high beam
- Ø 22 cm
- Weight 2,600 g

Spotlight (ECE Ref. 25), 12 V or 24 V

1F8 007 560-451

## **ACCESSORIES**

Protective cap\*


8XS 147 945-021

\* Protective caps are not legally authorised in some countries. Before use on public roads, please check with your competent government agency.

## **LIGHTING**

#### Reference number 25



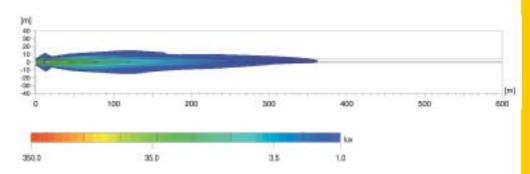

#### Lux is a unit used to measure light.

It provides the luminous flux which hits a certain surface from the light source. For example; an office should be illuminated with at least 500 Lux and the human eye can still read a newspaper without any problems at 1 Lux. The values under the Lux axis show where the respective illumination intensity is achieved in the light distribution diagrams.

#### Ref. 50, 40, 37.5, 17.5 and 12.5:

The reference number (Ref.) is a value which refers to the spotlight. According to the ECE regulation; the reference number may not exceed an upper limit of 100 per vehicle. The two values of the standard high beams (left and right main headlights) plus the value of other mounted spotlights are added. The value is entered on the cover lens of approved headlights.