





BRIEF INFORMATION

Rallye 3003 auxiliary spotlight – with LED position light, Ref. 25







Upright mounting. Inclination angle -45 ° to +90 °

DELIVERY SCOPE

- Halogen spotlight with LED position light
- · Attachment material
- Mounting instructions

PRODUCT CHARACTERISTICS

- The ideal supplement for better light performance for trucks, off-road vehicles and SUVs.
- High-boost reflector for even and ideal illumination of the road thanks to the latest computer technology
- 6 high-performance LEDs for position light
- Striking night-time design
- Impact resistant and sturdy casing
- With flexible holder system
- ECE type tested (E1)
- Suitable for H1 12 V / 55 W or H1 24 V / 70 W
- Clear real-glass lens
- Ø 22 cm
- Weight: 1350 g

With chrome design ring (ECE Ref. 25) With silver-coloured design ring (ECE Ref. 25) 1F8 009 797-431 1F8 009 797-421

ACCESSORIES

Protective cap*


8XS 168 664-001

* Protective caps are not legally authorised in some countries. Before use on public roads, please check with your competent government agency.

LIGHTING

Rallye 3003 with reference number 25



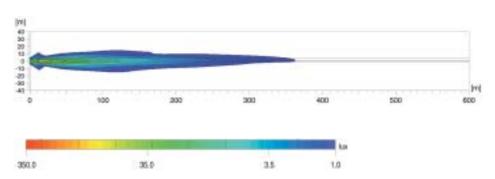

Lux is a unit used to measure light.

It provides the luminous flux which hits a certain surface from the light source. For example; an office should be illuminated with at least 500 Lux and the human eye can still read a newspaper without any problems at 1 Lux. The values under the Lux axis show where the respective illumination intensity is achieved in the light distribution diagrams.

Ref. 50, 40, 37.5, 17.5 and 12.5:

The reference number (Ref.) is a value which refers to the spotlight. According to the ECE regulation; the reference number may not exceed an upper limit of 100 per vehicle. The two values of the standard high beams (left and right main headlights) plus the value of other mounted spotlights are added. The value is entered on the cover lens of approved headlights.