



BRIEF INFORMATION

Heavy Tone Horn DL50

- Deep, penetrating tone
- Solid, black varnished housing
- Sturdy protective grille
- Extremely hard-wearing

PRODUCT FEATURES



- Effective sound
- Guaranteed brand quality
- Practice-proven service life

Special features

- Signal horn
- ECE- and CCC-compliant
- Bolted on grating
- Corrosion protection



www.hella.com/horns

TECHNICAL DETAILS

Technical specifications

Diameter



130 mm

Volume



114 dB (A)
@ 2 m

Audio frequency



310 / 380 Hz

Approval



ECE R28;
E12 01004; CCC

Voltage



12 V / 24 V

Target groups

Bus



Truck




Construction vehicle




Off-road



Technical drawing

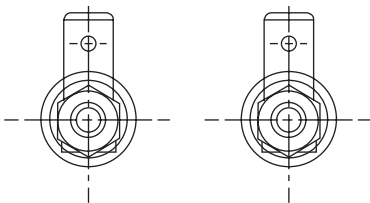

Drawing - connection F
6.3 mm flat plug, brass



Drawing - bracket position
(exemplary representation)

PROGRAM OVERVIEW

Part Number	Rated voltage (V)	Frequency (Hz)	Drawing - connection	Housing colour	α : position of bracket ($\pm 5^\circ$), 0° = position electrical connection	Remarks
3CB 004 811-042	12	310/ 380	F	black	180°	Set
3CA 004 811-001	12	310	F	black	180°	-
3CA 004 811-011	12	380	F	black	180°	-
3CA 004 811-021	24	310	F	black	180°	-
3CA 004 811-031	24	380	F	black	180°	-

HELLA KGaA Hueck & Co.

Rixbecker Straße 75
59552 Lippstadt, Germany
Tel.: +49 2941 38-0
Fax: +49 2941 38-7133
Internet: www.hella.com

© HELLA KGaA Hueck & Co., Lippstadt, 05.12