


INNOVATION FROM DENMARK



2025

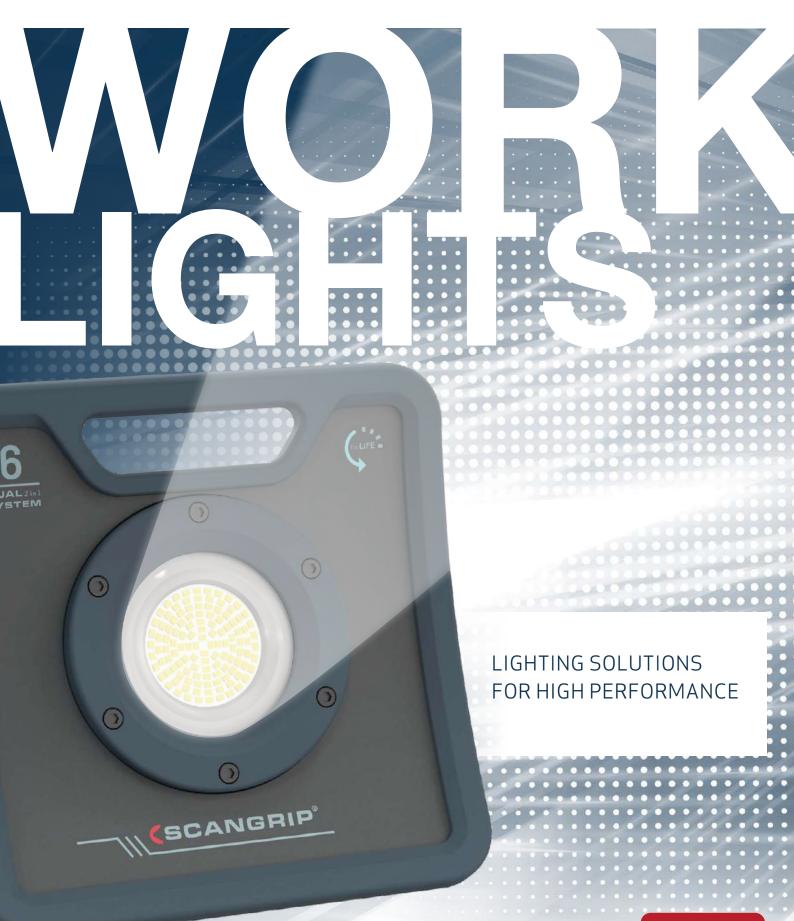

### Work lights of the future

The sophisticated SCANGRIP work lights are second-to-none and made for real professionals who need the best tool they can get for the task. The full product line-up covers all kinds of work light solutions with superior quality across the entire range. These are lights made for work and built to last.

### Latest technologies for best performance

SCANGRIP constantly push back the boundaries of LED lighting and battery technology, creating new cutting-edge work lights. We always reach for that extra brightness, that extra operation time, those little touches that make a real difference when you need the best work light you can get. We guarantee to provide you with only premium products for optimal performance.

### Extreme durability and functional design

SCANGRIP work lights are extremely durable and made to do the job again and again. The entire product line is sturdy and endures the really demanding working environment which expose professional workers and their tools to rough, wet, and dirty conditions. The lights are covered by a high IP protection level to resist even outdoor use in all kinds of weather.

### **Extended warranty**

Our lights meet the highest quality standards. They are so good that we offer a warranty extension of 3 years for all SCANGRIP work lights and 5 years for our FOR LIFE work lights. Because we stand by the products we offer.

### Reinventing the future of LED work lights

We are taking an ambitious strategic step forward by committing to develop LED work lights with minimized environmental impact while at the same time improving energy efficiency and expanding the lifespan.

The FOR LIFE concept represents a pioneering approach that focuses on reinventing the design and functionality of LED work lights and optimizing energy efficiency to the utmost. With sustainability as the focus point, we have rethought the traditional standards, pushing the boundaries to extend the lifespan of our lighting solutions.

13 of our top-selling work lights have undergone a complete transformation when it comes to visual design and come with a range of enhanced features that provide numerous benefits to the end-user. Read more about the enhancements on page 4.







# **SCANGRIP** - work lights of the future



FOR LIFE concept





UNIFORM series











STAR



NOVA series





FLASH LIGHT series




 $Technical\,specifications$ 

# forLIFE



# What's new?

- · Multi-LED design and new electronic design with improved efficiency up to 50%
- OPTILight setting for optimized light and runtime
- From 4 years design life to 10 years
- From 500 to 1000 battery charging cycles
- Temperature surveillance to protect the lamp
- · Rough service certified












Warranty extended from 3 to 5 years





# **Constant lumen performance**

You can trust that a SCANGRIP work light maintains a constant lumen output as it fulfills the strict requirements of the European Standard EN 13032-1. The FOR LIFE work lights are designed with advanced components and effective heat dissipation to ensure optimal performance.

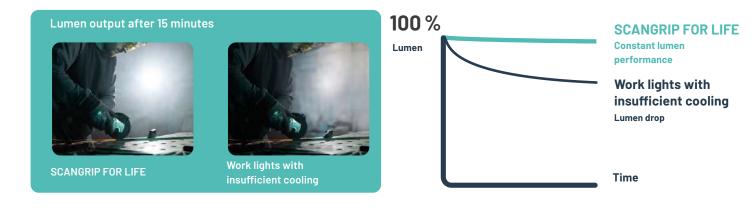

# **Environmental impact over time**



# **FOR LIFE work lights**



# Other work lights



5

# MAG – Europe's most bestselling work lights even further improved

ORIGINAL SCANGRIP

// The rechargeable handheld work lights everybody knows – and loves! With significantly improved light output, battery upgrade and even more functionality, the popular MAG work lights offer great value in every workshop operation.

The MAG series consist of universal and powerful multipurpose work lights that all professional users must have!

- Significantly improved with higher lumen output
- Integrated work light and flashlight functionality in one
- Strong built-in magnetic holders and retractable hooks for handsfree operation
- New stepless dimmer function

// MAG PRO WIRELESS - more flexibility with wireless charging



MAG PRO comes in a version with the option of wireless charging using the accessory SCANGRIP CHARGING PAD 03.5928, which can be purchased separately. The charging pad offers a convenient and uncomplicated way to charge your work light without the need for extra cables.

The charging pad is designed so that the work light automatically "slides into place" over the powerful magnets on the back. This means that MAG PRO WIRELESS can be charged also in a vertical position. The charging pad is prepared for fixed mounting, enabling efficient use of space in the workshop.



03.5691

Work light with COB LEDs and spotlight providing 600 lumen





## CHARGING PAD

03.5928

NEW

S

Optional accessory for MAG PRO WIRELESS.
Can also be used for charging most mobile phones and other compatible devices.



# // Updated and more powerful than ever

Taking advantage of the latest high performance LED technology, the MAG range comprises extremely powerful work lights providing significantly improved light output. Compared to the previous MAG 3 and MINI MAG, the new MAG PROs are upgraded to IP54 and have a new design with battery indicator on front.

# // Multipurpose with cool design

The characteristic and elegant design of the MAG hand lamps provides an ergonomic and user-friendly grip. Place anywhere you want with the strong built-in magnetic holders and retractable suspension hooks to obtain complete flexibility. The lamp head is flexible and tilts up to 180 degrees.

# // Stepless dimmable



MAG PRO, MINI MAG PRO and MAG PEN 3 are upgraded with a stepless dimmer function in the range of 10 to 100 % that enables you to adjust the light output to the work task.



MAG 03.5400 Work light with SMD LEDs and spotlight providing 300 lumen





MAG PRO

03.5690 Work light with COB LEDs and spotlight providing 600 lumen

# // Rechargeable inspection penlight

Upgraded with the highly efficient COB LED technology, MAG PEN 3 provides powerful illumination both from the lamp head and precision top light.

The design is compact allowing access in the most inaccessible places. It comes with built-in magnets both in the turnable clips and at the bottom for flexible positioning.







### MINI MAG PRO

03.5692

Work light with COB LEDs and spotlight providing 200 lumen





# MAG PEN 3

03.5116

Pencil work light with COB LEDs and spotlight providing 150 lumen



# **UNIFORM** - extremely durable work lights ORIGINAL SCANGRIP The UNIFORM series features robust and ergonomically designed handlamps that deliver consistently uniform illumination, making them ideal for any demanding work tasks. Rechargeable High efficiency multi-LED design OPTILight setting for optimized light and runtime with a simple touch Compact and flexible design with built-in magnet and clip Resistant to water and dust with an IP65 rating **PRODUCT IMPROVEMENTS** COMPARED TO PREVIOUS VERSIONS Up to 52 % efficiency improvement OPTILight functionality Dedicated buttons for on/off and brightness levels SCANGR Double temperature surveillance to protect the lamp and battery Rough service certified



### Extremely durable work light

UNIFORM is a universal LED handlamp with a top light, offering all the functionality you can dream of. The OPTILight setting ensures optimized light and runtime with a simple touch.

UNIFORM is built to endure tough environments, and features a turnable hook, strong magnet, and belt clip for flexible positioning. Designed with user-friendly battery indicator. 20 % recycled material.



Charging base can easily be mounted on the wall












Handy rechargeable LED work light providing 200 lumen

Pocket-sized and ultra-slim design with top light and OPTILight setting. Battery indicator.  $7\,\%$  recycled material.



# Convenient 2-in-1 rechargeable LED work light providing 150 lumen

User-friendly design with a top light and OPTILight setting. Pocket clip for easy portability. Battery indicator. 5 % recycled material.



Flexible lamp head tilts up to 180 degrees. Supplied with a strong built-in magnet and a turnable sturdy hook designed to fit the work belt.







UV-**FORM** 03.5408

PATENT

Work light with UVtop light (400 nm) providing up to 250 lumen

UV-FORM is a rechargeable LED work light with powerful  $1.8\,\mathrm{W}$  UV-light on the top. The most powerful UV-light on the market. Basically you get a universal indispensable work light and UV detection in one, and at the same time it replaces special UV detection lights.

The ultraviolet light is intended for leak detection in air-conditioning systems by means of trace elements. Also useful for leak detection of larger, complex refrigeration/freezing appliances, process cooling systems, heat pump systems etc.

# **SLIM** – Ultra-thin rechargeable LED work lights



// The SCANGRIP SLIM light series offers a true, multifunctional 3-in-1 lighting solution for all kinds of application areas.

- Rechargeable
- High efficiency multi-LED design
- OPTILight setting for optimized light and runtime with a simple touch
- Ultra-thin design for reaching narrow and inaccessible areas
- 100% foldable body, built-in magnet, and hook for flexible positioning

# BCANGRIP

# PRODUCT IMPROVEMENTS COMPARED TO PREVIOUS VERSIONS

- Up to 30 % efficiency improvement
- OPTILight functionality
- Dedicated buttons for on/off and brightness levels
- Battery indicator
- Double temperature surveillance to protect the lamp and battery
- Min. 1000 charging cycles





# // Ultra-slim light for inspection

The thin, compact design only ø9 mm allows inspection in even the most inaccessible and narrow work areas. This makes the SLIM lights ideal for very demanding and difficult inspection jobs

# // Flexible work light

By making use of the built-in magnet, you can place the work light on any magnetic surface and adjust the main light to the most optimal angle. When you fold the lamp, the light transforms into a compact handheld work light that is perfect to carry in your pocket.

# // Flashlight function

When folded, the 100-lumen spotlight acts as a powerful flashlight, featuring a convenient and secure grip.



















SLIM 03.6211

Ultra-thin rechargeable LED work light providing 500 lumen. 13 % recycled material.



# ULTRA SLVM inspection hand lamps



// The sophisticated and streamlined LINE LIGHT inspection hand lamps are made in Denmark, and present a golden example of our ability to push back the boundaries of LED lighting creating work lights with optimal performance, extreme durability and lots of bright functionalities.

- Sturdy and waterproof IP65
- Ultra-slim design (ø25 mm) allows inspection in even most inaccessible places
- Flexible positioning with adjustable hook with magnet
- Flexible gooseneck fixtures available as optional accessories


(SCANGRIP'








Both lamps are delivered with adjustable hook with clip holder and magnet







The very slim design with a diameter of only 25 mm makes it possible to illuminate even hard to reach compact areas.

# LINE LIGHT C+R

03.5243

Inspection work lamp with DUAL SYSTEM and top spotlight providing up to 900 lumen



03.5244

Rechargeable inspection work lamp with spotlight providing up to 600 lumen







(SCANGRIP







# LINE LIGHT bonnet light ORIGINAL SCANGRIP Superior bonnet light on the market Improved light output (1400 lumen) Dust and waterproof, IP65 Most slim and compact bonnet light on the market Extremely low weight, less than 1000 g • Choose between 2 light settings (50 % or 100 %) for maximized operating time DUAL SYSTEM is new intelligent and innovative lighting functionality. The new BONNET LIGHT is with DUAL SYSTEM which means both rechargeable and with 5 m rubber cable offering unlimited application possibilities and complete freedom. Very easily you change over: it takes only a second to connect the power cable - or disconnect when needed.



# // Illuminates the entire engine bay

The BONNET LIGHT provides you with an extremely bright and powerful illumination of the entire engine bay.

Supplied with an adjustable telescopic holder with soft-padded hook ends providing a firm and scratch-free grip on the vehicle. The holder is compact and takes up less space in storage.



Without cable the bonnet light might also to be used as a large inspection lamp.





DUAL 2 in 1 SYSTEM



03.5240



Inside the cabin the BONNET LIGHT may also be used as work light either mounted by the telescopic holder or mounted onto the windscreen by the flexible arm with suction cup.





# // FLEXIBLE suspensions

A range of accessories are available to position the LINE LIGHT lamps



GOOSENECK 03.5219

20 cm flexible arm with clip holder and ø60 mm suction cup



GOOSENECK

03.5218

20 cm flexible arm with clip holder and ø60 mm magnet



HOOK

Adjustable hook with clip holder and magnet

# HEADLAMPS for professionals

Powerful, hands-free lighting solutions for a wide range of application areas.

Rechargeable

ORIGINAL

- Illuminates your entire workspace
- Long duration time
- Easy to operate
- Sensor function with touchless on/off switch

Unlike traditional headlamps that only provide a narrow beam, the I-VIEW and ZONE headlamps are designed to provide optimum work light illuminating your entire work area. With advanced LED technology, these headlamps offer strong and uniform illumination, sparing you from the need for frequently repositioning your head to light up your workspace.

Overall, all the headlamps are comfortable to wear throughout the day and perfect for demanding tasks that require the use of both hands.

# // ZOOM - Rechargeable headlamp with 3-step function

Z00M is a small, compact yet very powerful headlamp providing 220 lumen and with a remarkable low weight of only  $100 \, \mathrm{g}$ .



Up to 80 m

The beam angle can be adjusted from  $10^{\circ}$  to  $60^{\circ}$  providing a beam distance up to 80 m.

The light output is adjustable in three steps and a new feature is the »READING MODE setting«, which provides just enough light to read and enables 19 hours of operating time.

ZOOM comes in a compact design and the light can be tilted 45° to obtain the optimum lighting angle.



Reading mode setting Step 1 3-STEP FUNCTION

ZOOM

03.5627



Adjustable lamp head



Adjustable beam angle 10°-60°









## PRODUCT IMPROVEMENTS COMPARED TO PREVIOUS VERSION

- 19 % recycled material
- **OPTILight functionality**
- Dedicated buttons for on/off and brightness levels

- Min. 1000 charging cycles
- Rough service certified



## // Rechargeable LED headlamp with sensor

I-VIEW is a powerful headlamp featuring OPTILight for optimized light and runtime with a simple touch. With the sensor mode, you can effortlessly control the lamp by waving a hand in front of it, even with gloves on. The lightweight and modern design includes a comfortable woven band. A user-friendly battery indicator keeps you updated on battery life, and the headlamp is designed to perform consistently in tough work environments, being both durable and resistant to water and dust (IP65).



**ZONE** 2 03 5850





EU DESIGN PATENT

# // Rechargeable ZONE 2 headlamp

The new ZONE 2 headlamp provides optimum work light illuminating the entire field of view. It is now delivering even more value for money for the professional user. The light output was increased by 33 % from 150 to 200 lumen, and with improved battery technology and now three light settings, including the new »reading mode«, the maximum operating time was increased to 22 hours. The design has become more compact, modern and user-friendly, and the new ZONE 2 also features a battery indicator and upgraded IP rating to IP54.





# Bracket for I-VIEW mounting **NEW** I-VIEW HARD HAT BRACKET

I-VIEW and **ZONE 2 HEADLAMPS** 



**STANDARD HEADLAMP** 



# STAR – work light and floodlight in one

ORIGINAL SCANGRIP SINCE 1906

// STAR is the missing link between a work light and a floodlight. It is a new multifunction work light that does it all!

- Extremely powerful illumination, up to 1000 lumen
- Rechargeable up to 5 h operation time
- Waterproof IP65
- Ergonomic design for a comfortable, firm hand grip
- Flexible handle for multifunctional positioning and application
- Sturdy handle with built-in magnet
- Direct mounting on the SCANGRIP TRIPOD
- Durable housing made of shock-resistant plastic material
- Built-in powerbank





# // Multifunctional work light

STAR is designed to be the work light that does it all. The lamp is ergonomically designed to used as a hand held work light. Extending the position of the handle, the lamp transforms itself to be a searchlight.

# // Handy floodlight

Due to the extremely powerful light output, STAR is also applicable for illumination of a larger working area, in spite of its small size compared to other floodlights. The handle is designed for direct mounting on the SCANGRIP TRIPOD.

# // Flexible positioning

Due to the flexible handle the STAR can stand in different positions to obtain the optimal lighting angle for a specific work task. The handle is also clickable in fixed position to serve as a hook for suspension. Using the powerful built-in magnet in the handle the STAR can be placed in flexible positions on any metallized surface.



# // Powerbank

Built-in power bank with USB outlet to charge mobile devices.



STAR 03.5620







PATEN 345103





Flexible positioning



Position the light directly on the SCANGRIP TRIPOD up to 3 m



# **NOVA** range – world's best work lights for the professional user

ORIGINAL SCANGRIP

// SCANGRIP's NOVA work lights are well-known for their exceptional power and durability, making them the go-to choice for professionals. With universal use and sturdy design, they provide reliable lighting for a variety of tasks.

- Most sturdy and durable work lights made for ROUGH SERVICE USE
- Extremely powerful illumination, up to 6000 lumen
- Built for outdoor work
- Stands and suspensions for flexible lighting positioning







# // NOVA work lights for every working situation

The NOVA range offers a wide selection of durable work lights for you to choose from. So, simply select your favourite NOVA model from the various options available.

# // Extreme durability

The NOVAs are designed to endure the rough, wet, and dirty conditions of the professional working environment. They are built to withstand even outdoor work in all kinds of weather conditions.

# // Designed for efficient workshop use

The high efficiency multi-LED design of each NOVA work light provides a uniform and completely even illumination with colour temperature close to daylight which is particularly effective as work lighting. The light dimmer function makes it possible to adjust the light into different levels.





# // Various NOVA models

Rechargeable and portable

Rechargeable with DUAL SYSTEM



1000 / 2000 lumen



4000 / 6000 lumen



OPTILight function

DUAL 2 in 1

SYSTEM



Durable work lights designed for ROUGH SERVICE USE

# **NOVA MINI** – extremely compact handheld work light



// NOVA MINI stands out with its compact and versatile design. It is a preferred choice for professionals seeking portability and flexibility.



- High-efficiency multi-LED design providing 1000 lumen
- OPTILight setting for optimized light and runtime with a simple touch
- SMART GRIP 4-in-1 system for versatile use
- Resistant to water and dust with an IP65 rating

# PRODUCT IMPROVEMENTS COMPARED TO PREVIOUS VERSION

- 27 % efficiency improvement
- 46 % recycled material
- OPTILight functionality
- Dedicated buttons for on/off and brightness levels
- · Battery indicator
- Double temperature surveillance to protect the lamp and battery
- Min. 1000 charging cycles
- Rough service certified









# // Small-sized with powerful illumination

NOVA MINI is the perfect choice for professionals seeking a portable lighting solution that can easily accompany them on their tasks. Its compact design and impressive 1000 lumen output, which is exceptional for its size, make it suitable for a wide range of work applications, especially in confined spaces. With an IP65 rating, it is designed to endure demanding work environments.

# // SMART GRIP 4-in-1 system

The lamp is supplied with a special, patented SMART GRIP 4-in-1 system that integrates several multi-functions in the same unit. The ring is based on the functionality you know from e.g. mobile phones which makes it easier and more convenient to keep the lamp in your hand for a long time. It relieves the muscles and increases ergonomics.

The clip is designed to fit the work belt and carry the lamp the entire day, and when both hands are needed for a task, the strong built-in magnet can be used for flexible positioning. Furthermore, SMART GRIP can be used as a stand on any available surface.







03.6200



# NOVA R handlamp – portable, rechargeable work light

ORIGINAL SCANGRIP

// The handheld NOVA R work light provides powerful illumination and high flexibility – perfect to carry around from job to job.

- High-efficiency multi-LED design providing 2000 lumen
- OPTILight setting for optimized light and runtime with a simple touch
- Compact and lightweight design
- Versatile mounting options with powerful integrated magnet
- Resistant to water and dust with an IP65 rating

# PRODUCT IMPROVEMENTS COMPARED TO PREVIOUS VERSION

- 13 % efficiency improvement
- 47 % recycled material
- OPTILight functionality
- Dedicated buttons for on/off and brightness levels
- Double temperature surveillance to protect the lamp and battery
- · Min. 1000 charging cycles
- · Rough service certified









PATENT PENDING

# // Portable and universal work light

The NOVA R handlamp is a universal all-around work light designed for the professional user. Featuring the latest high-performance LED technology, NOVA R provides 2000 lumen with uniform and even illumination.

NOVA R is designed to withstand tough work environments, ensuring durability and resistance to water and dust (IP65). The adjustable light output gives you control over the illumination, while the separate indicators for runtime and bat-

tery life allow for easy monitoring of operating time and remaining battery power.






# // Multifunctional design for high flexibility

NOVA R is easy to carry and is ergonomically designed for a good grip on the handle, which is also equipped with powerful integrated magnets for flexible mounting. Due to the flexible handle, NOVA R can be placed in different positions to obtain the desired lighting angle. The handle is also designed for direct mounting on the TRIPOD or the SCAFFOLDING BRACKET.



NOVA R 03.6201



# **NOVA** – extremely durable work lights built for rough and demanding work environments



// Universal and powerful work lights for the most challenging lighting operations in every rough and demanding work environment.

- Portable LED work lights with versatile design for easy transportation
- High-efficiency multi-LED design
- OPTILight setting for optimized light and runtime in a simple touch
- Water and dust-resistant (IP67)
- Accessories compatible with a variety of accessories to enhance functionality

## Rechargeable NOVAs

# PRODUCT IMPROVEMENTS COMPARED TO PREVIOUS VERSIONS

- Up to 14 % efficiency improvement
- OPTILight functionality
- Dedicated buttons for on/off and brightness levels
- Easier cable connectivity and improved bracket design
- Double temperature surveillance to protect the lamp and battery
- Min. 1000 charging cycles
- · Rough service certified





# // Designed for efficient workshop use

The iconic design of the NOVA work lights features an integrated carrying handle and a flexible stand, allowing for easy transportation and quick adjustments in lighting angles. The stand is designed for direct mounting on the SCANGRIP TRIPOD, offering versatile placement options.

When transitioning between tasks or working on a large-scale project, the user-friendly design makes it easy to set up the ideal lighting conditions, thus enhancing efficiency.

# // Rechargeable NOVAs

C+R stands for cable and rechargeable and is a unique DUAL SYSTEM that makes it possible to use the work light with a 5m rubber power cable or simply without the cable. It only takes a second to connect the power cable or disconnect it when a cordless work light is needed, providing greater flexibility on the worksite. rechargeable versions are also supplied with a user-friendly display showing both battery capacity and the remaining operating time.



#### NOVA 4 C+R

03.6204AU

Durable rechargeable LED work light providing 4000 lumen. 44 % recycled material.

DUAL 2 in 1 SYSTEM



### NOVA 6 C+R

03.6205AU

Durable rechargeable LED work light providing 6000 lumen. 47 % recycled material.

DUAL 2 in 1 SYSTEM PATENT PENDING







# STANDS and SUSPENSIONS



# // High stability tripod

The SCANGRIP TRIPOD is indispensable for stationary positioning of the work light for illumination in a specific working area. The SCANGRIP TRIPOD is extendable from only  $1.35 \mathrm{m}$  up to  $3 \mathrm{m}$  which gives you complete flexibility to position the light in the requested height.

The stable construction of the SCANGRIP TRIPOD makes it safe even when fully extended. It is supplied with anchor points that provide an opportunity for extra stability if the tripod is exposed to strong wind or standing on an uneven surface. To increase safety when in use, the cable of the lamp can be fixed in the safety clips placed on each separate leg.

# // Wheel stand for mobile positioning



The SCANGRIP WHEEL STAND makes it easy to move the light to where you need it, and at the same time avoids uncomfortable and heavy lifting from one workplace to the other. It is upgraded with a new base equipped with five wheels for improved safety and stability and easy maneuverability, two of which can be locked to secure a safe and fixed position.

As an additional feature, it now comes with a flexible bracket that enables you to easily position a second work light to illuminate from below. The extra mounting bracket is adjustable in the height and provides complete flexibility to position the light in the optimum height.



Welded steel mounting cap 10 mm thread

SCANGRIP TRIPOD

03.5431

# SCAFFOLDING BRACKET

03.5341



For flexible positioning on scaffoldings or any round object ø40-50 mm



## DUAL BRACKET 03.5308





Dual bracket for positionin of two lamps on TRIPOD



# // Suspensions for flexible positioning



03.5308



Dual bracket for positioning of two lamps on TRIPOD or WHEEL STAND

SCAFFOLDING BRACKET

For flexible positioning on scaffoldings or any round object ø40-50 mm





For flexible positioning of the work light on any magnetic surface

# MAGNET BRACKET - Large

03.5391

03.5341







# // SCANGRIP DIFFUSER provides a large dispersion and spreads the light

Enlightens the entire working area, even into the darkest corner and softens the light avoiding hard shadows. Minimizes reflections and harsh light and provides non-blinding work light.







Easy and safe mounting with strong magnets

### SCANGRIP DIFFUSER

03.5750







### SCANGRIP DIFFUSER - Large

03.5751







For compatibility, please refer to scangrip.com



# FLASHLIGHT series

// SCANGRIP provides the strongest and most comprehensive range of LED work lights on the market. We are now proud to present an upgraded and re-designed flashlight series providing extremely high light output and improved functionality for an even better user experience.

The new flashlights are available both as rechargeable and with batteries, providing brand-new features and accessories to increase work efficiency.

- BOOST MODE
- Practical clip-on holster for the work belt
- One-hand operated magnetic switch
- Higher lumen output
- Long operation time

(SCANERIA)

Boost mode

Clip-on holster



(SCANGRIP

Focus function

Ergonomic design

High durability

Wrist strap

# **FLASH** series with batteries



// The new durable flashlight series with Alkaline batteries is designed for the rough and demanding work environment providing high-quality flashlights for all types of inspection tasks.

(SCANGRIP





# Powerbank with battery indicator

The powerbank can be used for recharging your SCANGRIP work light as well as other devices. Featuring battery indicator and intelligent load detection. Modern and durable design.

### SCANGRIP POWERBANK

03.5782 4000 mAh aluminum powerbank

## The new ultra-slim **FLASH PENCIL**

A must-have for everybody doing daily inspection tasks. It is so thin, only ø15 mm. Supplied with a clip and designed to always have in the chest pocket, right at your fingertips.

Weighing only 32 g the FLASH PENCIL is incredibly lightweight.

# FLASH **PENCIL**

03.5130

Ultra-slim pencil flashlight providing 75 lumen

# FLASH **PEN**

03.5131

Pencil flashlight with boost mode providing up to 200 lumen

### FLASH 300

03.5132

(SCANGRIP

Flashlight with boost mode providing up to 300 lumen

(SCANGRIP®

Incl. silicone wrist strap and clip-on holster

### FLASH 600

03.5133

Flashlight with boost mode providing up to 600 lumen

Incl. silicone wrist strap and clip-on holster



# Rechargeable FLASH R series

// Sturdy and powerful flashlights of extraordinary high quality providing extremely bright illumination and durability. Easily recharged by the enclosed USB cable.

The new WORK PEN 200 R is a real work light for professionalinspection work. It is extremely powerful for its small size. Supplied with a clip for the chest pocket and built-in magnets for flexible positioning.

PATENT 7180187











Pocket sized FLASH 12-24V

With a new brushed-up look, the FLASH 12-24V is designed to easily charging directly from the cigarette lighter socket in your car.
No need of charger device, cable, or batteries!

FLASH **12-24V** 03.5124

### FLASH 1000 R

03.5138

Rechargeable flashlight with boost mode providing up to 1.000 lumen Incl. silicone wrist strap and clip-on holster

### FLASH 600 R

03.5137

Rechargeable flashlight with boost mode providing up to 600 lumen Incl. silicone wrist strap and clip-on holster

### FLASH PEN R

03.5136

Rechargeable pencil flashlight with boost mode providing up to 300 lumen

### WORK PEN 200 R

03.5127

Rechargeable LED penlight providing up to 200 lumen

Rechargeable flashlight providing 130 lumen



## MAG series

	•			_
	MAG PEN 3	MINI MAG PRO	MAG	MAG <b>PRO</b>
Product number	03.5116	03.5692	03.5400	03.5690
Light source	COB LED Spot: CREE XP-G2	COB LED Spot: High power LED	10 SMD LEDs Spot: High power LED	COB LED Spot: High power LED
Luminous flux, lumen	15-150 Spot: 80	20-200 Spot: 80	150-300 Spot: 80	60-600 Spot: 150
Adjustable light output	Stepless	Stepless	2 levels	Stepless
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
ССТ	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	2	2.5	1.5
Operating time with min. lumen, h	20	20	5	15
Charging time, h	3.5	3	4	4
Battery	3.7 V / 750 mAh Li-on	3.7 V / 1200 mAh Li-ion	3.7 V / 2200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP20	IP54	IP20	IP54
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 2.5 W	Max 3.5 W	Max 6.5 W
Charger incl.	No	No	Country-specific	Country-specific
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	174 x 31 x 21 mm	200 x 40 x 28 mm	260 x 61 x 43 mm	261 x 62 x 43 mm
Net weight	78 g	157 g	252 g	339 g

# **UNIFORM** series







NEW         UNIPEN         NEW         MINIFORM         NEW         UNIFORM           Product number         03.6209         03.6207         03.6208           Light source         High efficiency multi-LED design with 20 LEDs         50-500 Spot 175         500 Lux@0.5 m         400 Lux Man Lux Man Lux Man Lux Man Lux Man Lux				
Light source         High efficiency multi-LED design with 20 LEDs         High efficiency multi-LED design with 32 LEDs           DPTILight setting         500 lux@0.25 m		NEW UNIPEN	NEW MINIFORM	NEW UNIFORM
Light source         design with 20 LEDs         design with 20 LEDs         design with 32 LEDs           Luminous flux, lumen         15-150 Spot: 75         20-200 Spot: 120         50-500 Spot: 175           OPTILight setting         500 lux@0.25 m         500 lux@0.25 m         500 lux@0.25 m           Adjustable light output         3 levels         3 levels         3 levels           Beam angle         100° Spot: 50°         115° Spot: 35°         110° Spot: 30°           CRI         Ra > 80         Ra > 80         Ra > 80           CCT         5700 K         5700 K         5700 K           Operating time max./ min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact	Product number	03.6209	03.6207	03.6208
OPTILight setting         500 lux@0.25 m         500 lux@0.25 m         500 lux@0.5 m           Adjustable light output         3 levels         3 levels         3 levels           Beam angle         100° Spot: 50°         115° Spot: 35°         110° Spot: 30°           CRI         Ra > 80         Ra > 80         Ra > 80           CCT         5700 K         5700 K         5700 K           Operating time max. / min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact protection         IK07         IK07         Impact protection         Impact protection         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -	Light source			
Adjustable light output         3 levels         3 levels           Beam angle         100° Spot: 50°         115° Spot: 35°         110° Spot: 30°           CRI         Ra > 80         Ra > 80         Ra > 80           CCT         5700 K         5700 K         5700 K           Operating time max. / min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V/800 mAh Li-ion         3.7 V/1010 mAh Li-ion         3.7 V/2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V/1 A         5 V/1 A         5 V/1 A <t< th=""><th>Luminous flux, lumen</th><th>15-150 Spot: 75</th><th>20-200 Spot: 120</th><th>50-500 Spot: 175</th></t<>	Luminous flux, lumen	15-150 Spot: 75	20-200 Spot: 120	50-500 Spot: 175
Beam angle         100° Spot: 50°         115° Spot: 35°         110° Spot: 30°           CRI         Ra > 80         Ra > 80         Ra > 80           CCT         5700 K         5700 K         5700 K           Operating time max. / min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V/800 mAh Li-ion         3.7 V/1010 mAh Li-ion         3.7 V/2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V/1 A         5 V/1 A         5 V/1 A           Power consumption         1.1 W         1.2 W	OPTILight setting	500 lux@0.25 m	500 lux@0.25 m	500 lux@0.5 m
CRI         Ra→80         Ra→80         Ra→80         Ra→80           CCT         5700 K         5700 K         5700 K           Operating time max. / min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No <th>Adjustable light output</th> <th>3 levels</th> <th>3 levels</th> <th>3 levels</th>	Adjustable light output	3 levels	3 levels	3 levels
CCT         5700 K         5700 K         5700 K           Operating time max. / min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +4	Beam angle	100° Spot: 50°	115° Spot: 35°	110° Spot: 30°
Operating time max. / min. lumen, h         3/22         3/27         3/32           Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60	CRI	Ra > 80	Ra > 80	Ra > 80
Operating time OPTILight, h         5.5         7         4           Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	ССТ	5700 K	5700 K	5700 K
Charging time, h         2.5         3         3.5           Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Operating time max. / min. lumen, h	3/22	3/27	3/32
Battery         3.7 V / 800 mAh Li-ion         3.7 V / 1010 mAh Li-ion         3.7 V / 2600 mAh Li-ion           Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Operating time OPTILight, h	5.5	7	4
Verified no. of charging cycles         Min. 1000         Min. 1000         Min. 1000           Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Charging time, h	2.5	3	3.5
Protection class         IP65         IP65         IP65           Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Battery	3.7 V / 800 mAh Li-ion	3.7 V / 1010 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Rough service         Yes         Yes         Yes           Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Verified no. of charging cycles	Min. 1000	Min. 1000	Min. 1000
Impact protection         IK07         IK07         IK07           Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Protection class	IP65	IP65	IP65
Impact resistance         2 m         2 m         2 m           Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Rough service	Yes	Yes	Yes
Cable         1 m USB-A to USB-C         1 m USB-A to USB-C         1 m USB-A to USB-C           Operating voltage AC         -         -         -           Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Impact protection	IK07	IK07	IK07
Operating voltage AC         -	Impact resistance	2 m	2 m	2 m
Charging voltage/current DC         5 V / 1 A         5 V / 1 A         5 V / 1 A           Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Cable	1 m USB-A to USB-C	1 m USB-A to USB-C	1 m USB-A to USB-C
Power consumption         1.1 W         1.2 W         3.2 W           Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Operating voltage AC	-	-	-
Charger incl.         No         No         No           Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A
Operating temperature         -10 to +40 °C         -10 to +40 °C         -10 to +40 °C           Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Power consumption	1.1 W	1.2 W	3.2 W
Dimensions         158 x 27 x 21 mm         126 x 60 x 23.5 mm         188 x 60 x 33 mm	Charger incl.	No	No	No
	Operating temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Net weight 77 g 106 g 263 g	Dimensions	158 x 27 x 21 mm	126 x 60 x 23.5 mm	188 x 60 x 33 mm
	Net weight	77 g	106 g	263 g





## MAG series







Product number         03.5691         03.5928           Light source         COB LED Spot: High power LED         -           Luminous flux, lumen         60-600 Spot: 150         -           Adjustable light output         Stepless         -           CRI         Ra > 80         -           CCT         6000 K         -           Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz			'
Light source         COB LED Spot: High power LED         -           Luminous flux, lumen         60-600 Spot: 150         -           Adjustable light output         Stepless         -           CRI         Ra > 80         -           CCT         6000 K         -           Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz		MAG PRO WIRELESS	CHARGING PAD
Light source         Spot: High power LED         -           Luminous flux, lumen         60-600 Spot: 150         -           Adjustable light output         Stepless         -           CRI         Ra > 80         -           CCT         6000 K         -           Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Product number	03.5691	03.5928
Adjustable light output         Stepless         -           CRI         Ra > 80         -           CCT         6000 K         -           Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Light source		-
CRI         Ra > 80         -           CCT         6000 K         -           Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Luminous flux, lumen	60-600 Spot: 150	-
CCT         6000 K         -           Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Adjustable light output	Stepless	-
Operating time with max. lumen, h         1.5         -           Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	CRI	Ra > 80	-
Operating time with min. lumen, h         15         -           Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	ССТ	6000 K	-
Charging time, h         USB: 4 h - Wireless: 7 h         -           Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Operating time with max. lumen, h	1.5	-
Battery         3.7 V / 2600 mAh Li-ion         -           Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Operating time with min. lumen, h	15	-
Protection class         IP54         IP30           Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Charging time, h	USB: 4 h - Wireless: 7 h	-
Impact protection         IK07         IK07           Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Battery	3.7 V / 2600 mAh Li-ion	-
Impact resistance         1 m         1 m           Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Protection class	IP54	IP30
Cable         1 m USB         USB (excl.)           Charger voltage         -         100-240 V AC 50/60 Hz	Impact protection	IK07	IK07
Charger voltage - 100-240 V AC 50/60 Hz	Impact resistance	1 m	1 m
	Cable	1 m USB	USB (excl.)
51. 1. 1. 1. 2.00	Charger voltage	-	100-240 V AC 50/60 Hz
Charging voltage/current DC 5 V / I A 5 V / DC IA	Charging voltage/current DC	5 V / 1 A	5 V / DC 1A
Power consumption Max 6.5 W Max 5 W	Power consumption	Max 6.5 W	Max 5 W
Charger incl	Charger incl.	-	-
Temperature         -10 to +40 °C         -10 to +40 °C	Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions         261 x 62 x 43 mm         183 x 84 x 13 mm	Dimensions	261 x 62 x 43 mm	183 x 84 x 13 mm
Net weight         339 g         115 g	Net weight	339 g	115 g

POWER	RBANK	Product number
( ) ( ) ( )	POWERBANK with 4000 mAh aluminum battery and spiral cable. 5 V / 2 A. Ø28 x 103 mm. 130 g	03.5782

## **SLIM** series





JEIM Series			
	NEW MINI SLIM	NEW SLIM	
Product number	03.6210	03.6211	
Light source	High efficiency multi-LED design with 16 LEDs	High efficiency multi-LED design with 20 LEDs	
Luminous flux, lumen	20-200 Spot: 100	50-500 Spot: 150	
OPTILight setting	500 lux@0.25 m	500 lux@0.5 m	
Adjustable light output	3 levels	3 levels	
Beam angle	110° Spot: 25°	110° Spot: 25°	
CRI	Ra > 80	Ra > 80	
ССТ	5700 K	5700 K	
Operating time max. / min. lumen, h	2/19	2.5/27	
Operating time OPTILight, h	5.5	4	
Charging time, h	2.5	3.5	
Battery	3.7 V/800 mAh Li-ion	3.7 V/2600 mAh Li-ion	
Verified no. of charging cycles	Min. 1000	Min. 1000	
Protection class	IP30	IP30	
Rough service	-	-	
Impact protection	IK07	IK07	
Impact resistance	2 m	2 m	
Cable	1 m USB-A to USB-C	1 m USB-A to USB-C	
Operating voltage AC	-	-	
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	
Power consumption	1.4 W	3.5 W	
Charger incl.	No	No	
Operating temperature	-10 to +40 °C	-10 to +40 °C	
Dimensions	130 x 43 x 29 mm	166 x 46 x 29 mm	
Net weight	97 g	205 g	



# UNIFORM series

	UV- <b>FORM</b>
	UV-FURIM
Product number	03.5408
Light source	COB LED Spot: High power UV-light
Adjustable light output	2 levels
Beam angle	-
CRI	Ra > 80
ССТ	6000 K
Operating time with max. lumen, h	2.5
Operating time with min. lumen, h	5
Charging time, h	3
Battery	3.7 V / 1600 mAh Li-ion
Protection class	IP20
Impact protection	IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 3 W
Charger incl.	Country-specific
Temperature	-10 to +40 °C
Dimensions	155 x 60 x 32 mm
Net weight	156 g

# STAR series



	STAR
Product number	03.5620
Light source	COBLED
Luminous flux, lumen	140
Adjustable light output	500-1000
Beam angle	2 levels
CRI	Ra > 80
ССТ	6000 K
Operating time with max. lumen, h	2.5
Operating time with min. lumen, h	5
Charging time, h	8
Battery	3.7 V/5200 mAh Li-ion
Protection class	IP65
Impact protection	IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 8.5 W
Charger incl.	Country-specific
Temperature	-10 to +40 °C
Dimensions	156 x 103 x 98 mm
Net weight	620 g



# LINE LIGHT inspection

	LINE LIGHT C+R	LINE LIGHT <b>R</b>
Product number	03.5243	03.5244
Light source	36 SMD LED Spot: CREE XP-G2	20 SMD LED Spot: CREE XP-G2
Luminous flux, lumen	900 Spot: 150	600 Spot: 150
Iluminance, lux@0.5 m	1800 Spot: 1500	1200 Spot: 1500
Adjustable light output	No	No
Beam angle	75° Spot: 50°	75° Spot: 50°
CRI	Ra > 80	Ra > 80
ССТ	6500 K	6500 K
Operating time with max. lumen, h	2.5 Spot: 8	1.5 Spot: 4
Operating time with min. lumen, h	-	-
Charging time, h	4	6
Battery	3.7 V / 5200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP65	IP65
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	5 m / 2 x 1 mm² H05RN-F	1 m USB
Operating voltage AC	-	=
Charging voltage/current DC	4.2 V / 3.5 A	5 V / 1 A
Power consumption	Max 8 W	Max 5.5 W
Charger incl.	Yes	Country-specific
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 461 mm	ø25 x 357 mm
Net weight	300 g	220 g

# BONNET LIGHTS



	LINE LIGHT BONNET C+R
Product number	03.5240
Light source	64 SMD LED
Luminous flux, lumen	700-1400
Iluminance, lux@0.5 m	1000-2000
Adjustable light output	2 levels
Beam angle	75°
CRI	Ra > 80
ССТ	6500 K
Operating time with max. lumen, h	1.5
Operating time with min. lumen, h	3
Charging time, h	4
Battery	3.7 V / 5200 mAh Li-ion
Protection class	IP65
Impact protection IK07	
Impact resistance	1 m
Cable	5 m / 2 x 1.0 mm² H05RN-F
Operating voltage AC	-
Charging voltage/current DC	4.2 V / 3.5 A
Power consumption Max 13 W	
Charger incl.	Yes
Temperature	-10 to +40 °C
Dimensions	ø25 x 1017 mm
Net weight	470 g (980 g incl. rack)

# Headlamps





	ZONE 2	ZOOM
Product number	03.5850	03.5627
Light source	COBLED	LED
Luminous flux, lumen	20/100/200 (Step 1/2/3)	10/80/220 (Step 1/2/3)
Adjustable light output	3 levels	3 levels
Beam angle	120°/60°	10°/60°
CRI	Ra > 80	Ra > 80
ССТ	6000 K	6000 K
Operating time with max. lumen, h	2	4.5
Operating time with min. lumen, h	22	19
Charging time, h	2.5	2.5
Battery	3.7 V/1200 mAh Li-ion	3.7 V/2000 mAh Li-ion
Protection class	IP54	IP54
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 5.5 W
Charger incl.	No	No
Temperature	-10 to +40 °C	-10 to +40°C
Dimensions	84 x 31 x 37 mm	78 x 46.4 x 46.6 mm
Net weight	75 g	109 g

# **ACCESSORIES**







	NEW I-VIEW	
Product number	03.6212	
Light source	High efficiency multi-LED design with 12 LEDs	
Luminous flux, lumen	40-400	
OPTILight setting	500 lux@0.5 m	
Adjustable light output	3 levels	
Beam angle	120° x 60°	
CRI	Ra > 80	
ССТ	5700 K	
Operating time max. / min. lumen, h	2/21	
Operating time OPTILight, h	4	
Charging time, h	4.5	
Battery	3.7 V / 1400 mAh Li-ion	
Verified no. of charging cycles	Min. 1000	
Protection class	IP65	
Rough service	Yes	
Impact protection	IK07	
Impact resistance	2 m	
Cable	1 m USB-A to USB-C	
Operating voltage AC	-	
Charging voltage/current DC	5 V / 1 A	
Power consumption	2.6 W	
Charger incl.	No	
Operating temperature	-10 to +40 °C	
Dimensions	99 x 50 x 40 mm	
Net weight	130 g	



# NOVA rechargeable series











	NEW NOVA MINI	NEW NOVA R	NEW NOVA 4 C+R	NEW NOVA 6 C+R
Product number	03.6200	03.6201	03.6204AU	03.6205AU
Light source	High efficiency multi-LED design with 26 LEDs	High efficiency multi-LED design with 44 LEDs	High efficiency multi-LED design with 90 LEDs	High efficiency multi-LED design with 120 LEDs
Luminous flux, lumen	100-1000	200-2000	400-4000	600-6000
OPTILight setting	500 lux@0.5 m	500 lux@1 m	200 lux@2 m	200 lux@2 m
Adjustable light output	6 levels	6 levels	6 levels	6 levels
Beam angle	100°	110°	110°	110°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
ССТ	5700 K	5700 K	5700 K	5700 K
Operating time max. / min. lumen, h	1.5/18	1.5/17	2/18	1.5/15
Operating time OPTILight, h	6	3	3.5	4.5
Charging time, h	4	5.5	3	3.5
Battery	3.6 V / 3200 mAh Li-ion	7.2 V / 3200 mAh Li-ion	18.5 V / 2600 mAh Li-ion	18 V / 3200 mAh Li-ion
Verified no. of charging cycles	Min. 1000	Min. 1000	Min. 1000	Min. 1000
Protection class	IP65	IP67	IP67	IP67
Rough service	Yes	Yes	Yes	Yes
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	2 m	2 m	2 m	2 m
Cable	1 m USB-A to USB-C	1 m USB-A to USB-C	5 m / 2 x 0,75 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	24 V / 1.5 A	24 V / 2 A
Power consumption	7.3 W	14 W	25 W	37 W
Charger incl.	No	No	Yes	Yes
Operating temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	102 x 39 x 94 mm	166 x 60 x 167 mm	235 x 82 x 235 mm	273 x 88 x 270 mm
Net weight	278 g	840 g	1.98 kg	2.58 kg

# Accessories







	CHARGER FOR NOVA 4K C+R	CHARGER FOR NOVA 6K C+R	IN CAR CHARGING CABLE
Product number	03.5335AU	03.5336AU	03.5342
Dimensions	195 x 125 x 85 mm	250 x 120 x 85 mm	206 x 96 x 34 mm







# Accessories

MAGNETIC HOO		MAGNETIC GOOSENECK	SUCTION GOOSENECK	
Product number	03.5312	03.5218 03.5219		
Dimensions	156 x 45 x 45 mm	275 x 65 x 65 mm	275 x 65 x 65 mm	

# Accessories







	MAGNETIC CLIP HOLDER	CLIP - 1 PC. - INCL. FITTINGS	MAGNET - WITH SMALL CLIP - Ø30 MM	
Product number	03.5257	03.5214	03.5246	
Dimensions	100 x 65 x 65 mm	90 x 40 x 30 mm	60 x 50 x 40 mm	

### Accessories







710000001100		- •	
	USB CABLE	AU CHARGING PLUG 5V 2A	AU CHARGING PLUG 5V 1A
Product number	03.5307	03.5373AU	03.5368
Dimensions	95 x 35 x 20 mm	60 x 20 x 40 mm	60 x 40 x 20 mm

FLASH series	Committee of the Commit	The same of the sa	TEGANGEIP	tocontre-
	FLASH <b>PENCIL</b>	FLASH <b>PEN</b>	FLASH 300	FLASH <b>600</b>
Product number	03.5130	03.5131	03.5132	03.5133
Light source	LUMILEDS	CREE	CREE	CREE
Luminous flux, lumen	75	100-200	150-300	300-600
Adjustable light output	No	BOOST mode	BOOST mode	B00ST mode
Beam angle	15°	10°-60°	10°-60°	10°-60°
Beam distance	40 m	80 m	100 m	150 m
CRI	Ra > 70	Ra > 70	Ra >65	Ra >65
ССТ	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2.5	3.5	3	2
Operating time with min. lumen, h	-	-	-	-
Charging time, h	-	-	-	-
Battery	2 x AAAA / 1.5 V Alkaline	2 x AAA / 1.5 V Alkaline	3 x AAA / 1.5 V Alkaline	2 x C / 1.5 V Alkaline
Protection class	IP54	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	-	-	-	-
Charging voltage/current DC	-	-	-	-
Power consumption	Max 1.6 W	Max 1.2 W	Max 4.8 W	Max 7 W
Charger incl.	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø15 x 131mm	ø20 x 153 mm	ø32 x 133 mm	ø36 x 174 mm
Net weight	32 g	62 g	122 g	292 g

FLASH R series		SMALDON'	(administra	Colomorphism	CHENDRIPH
	FLASH <b>12-24V</b>	WORK PEN 200 R	FLASH <b>PEN R</b>	FLASH <b>600 R</b>	FLASH <b>1000 R</b>
Product number	03.5124	03.5127	03.5136	03.5137	03.5138
Light source	SAMSUNG LED	COB LED / CREE	CREE	CREE	CREE
Luminous flux, lumen	130	20-200 Spot: 150	150-300	300-600	500-1000
Adjustable light output	No	Stepless	B00ST mode	B00ST mode	B00ST mode
Beam angle	10°-70°	105°/20°	10°-60°	10°-70°	10°-60°
Beam distance	100 m	40 m	100 m	150 m	250 m
CRI	Ra > 70	Ra > 80	Ra > 65	Ra > 65	Ra > 70
ССТ	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1	1	7	7	5
Operating time with min. lumen, h	-	10	-	-	-
Charging time, h	2	2.5	3	4	4
Battery	3.7 V / 550 mAh Li-ion	3.7 V / 750 mAh Li-ion	3.7V / 1100 mAh Li-ion	3.7V / 2600 mAh Li-ion	3.7V / 4000 mAh Li-ion
Protection class	IP30	IP30	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	Cigarette Plug Connector	1 m USB	1 m USB	1 m USB	1 m USB
Charging voltage/current DC	10-28 V	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 2 A
Power consumption	Max 2 W	4 W	4 W	6 W	12 W
Charger incl.	No	No	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø30 x 105 mm	ø21 x 172 mm	ø24 x 169 mm	ø38 x 185 mm	ø42 x 196 mm
Net weight	88 g (100 g with cover)	54 g	83 g	253 g	345 g



# Embracing a more sustainable mindset

SCANGRIP is taking a strategic step forward to reinvent how professional LED work lights are made and how they impact the environment.

The FOR LIFE concept marks a new approach to designing LED work lights that are more long-lasting. As part of this sustainability focus, products marked with the FOR LIFE symbol have undergone a complete transformation when it comes to visual design and enhanced features.



Recycled materials have been incorporated wherever physically possible in both the product design and packaging. The packaging is made from 100% recycled materials and completely free of any plastic parts. Moreover, our printed brochures carry the Nordic Swan Ecolabel.

These changes represent just the first steps in our ongoing dedication to innovation and environmental responsibility.





SCANGRIP is innovation from Denmark and receives strong recognition in the marketplace for its product design, and the products are known for their high quality.

SCANGRIP strives for perfection, and is continuously optimizing and improving light output, battery capacity, design and ergonomics, durability, user-friendliness, and functionality. The aim is to set new standards for professional work lights.

SCANGRIP was established in 1906 and has a long, impressive history of manufacturing high-quality hand tools and work lights for the industrial, construction, and automotive sectors.

SCANGRIP is part of Hultafors Group - a global company offering a unique portfolio of premium brands within personal protection, tools, and other equipment for discerning craftsmen. Together, we are on a mission to create a better day for professional users.

This printed paper proudly carries the Nordic Swan Ecolabel, reflecting SCANGRIP's commitment to environmental responsibility.

**SCANGRIP.COM** 

ossprices VAT exclusive and subject to change without notice, errors an