



Technology with Vision

NEW RELEASE

- **Glowing body**
- **Swiping or Flashing Direction Indicator**
- **Striking modern design**



DuraLED® **PRIME** REAR SIGNAL LAMP SERIES

HELLA are proud to announce DuraLED® PRIME, the next generation range of our legendary DuraLED Rear Signal Lamps.

A modern, stylish clear lens, and signature glowing body design builds on 25 years of engineering prowess and HELLA's 'Fit & Forget' reliability. The distinctive glowing body is integrated into all model variants —Stop, Indicator, and Reverse— bringing a refined, uniform style to any vehicle or trailer unit. The indicator models are available in either modern Swiping or traditional Flashing versions.

DuraLED PRIME are interchangeable with original DuraLED and DuraLED-S, for seamless upgrades. A choice of 2.5 metre cable harness, or built-in DT connector make for easy, plug-and-play installation.

Type D Approval permits two adjacent lamps to be regarded as one for tail lamp regulations (excluding the main centre function/s), offering customers design flexibility, while ensuring compliance with ECE regulations.



**GLOWING
BODY**

Lamps shown illuminated.

**All signal lamps must be installed in accordance with local regulations.*



MODERN SWIPING INDICATOR OPTION

DuraLED® PRIME REAR SIGNAL LAMP SERIES



DuraLED® PRIME
All Models appear clear
until illuminated.



2BA 350 300-031 / 2BA 350 300-041
2BA 350 300-011 / 2BA 350 300-021
DuraLED® PRIME
Rear Direction Indicator/Rear Position Lamp



2SB 350 300-051 / 2SB 350 300-061
DuraLED® PRIME
Stop/Rear Position Lamp





2ZR 350 300-071 / 2ZR 350 300-081
DuraLED® PRIME
Reversing Lamp/Rear Position Lamp

Lamps shown illuminated.



Mounting	Surface mount with mounting bushes supplied. Suitable for horizontal and vertical mounting (Horizontal only for Swiping Direction Indicator Lamp)		
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts		
Power Consumption	Tail:	4.6W	
	Stop:	4.2W	
	Rear Direction Indicator:	4.0W	
	Reverse Light:	4.4W	
Temperature	Operating range -40° to +60°C		
Material	Housing: ASA Lens: High impact resistant PMMA		
Protection	Reverse polarity and transient spike circuit protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)		
Cable	2.5m of sheathed multi-core cable, or DT Connector		
Compliance	CISPR 25 Class 3		
Stop/Tail	E24 5945	ECE R148/01	E24 6480 ECE R10/06
Rear Direction Indicator/Tail	E24 5945	ECE R148/01	E24 6478 ECE R10/06
Reverse/Tail	E24 5945	ECE R148/01	E24 6479 ECE R10/06

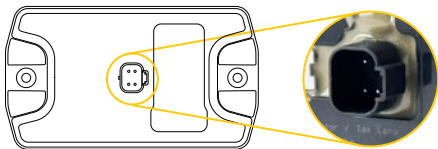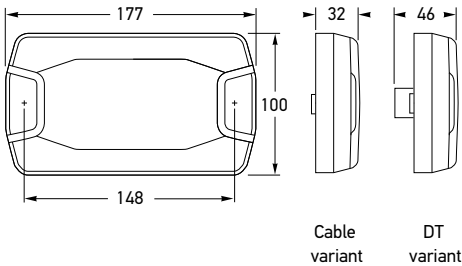

DT variant back shown above
All dimensions in mm

All Models share the same width, length, and mounting holes as current DuraLED® ranges.

*For more information on the DuraLED® Lifetime Warranty please visit [gdkk`-bn l . ` trsq`kh`mrnktsnmr](#)



Description		Part Number	Packaging
	DuraLED® PRIME Rear Direction Flashing Indicator Lamp	2BA 350 300-031	SINGLE CARTON
	DuraLED® PRIME Rear Direction Swiping Indicator Lamp	2BA 350 300-011	
	DuraLED® PRIME Rear Direction Flashing Indicator Lamp with DT Connector	2BA 350 300-041	
	DuraLED® PRIME Rear Direction Swiping Indicator Lamp with DT Connector	2BA 350 300-021	
	DuraLED® PRIME Rear Direction Flashing Indicator Lamp (BULK)	2BA 350 300-037	BULK PACK OF 12
	DuraLED® PRIME Stop/Rear Position Lamp	2SB 350 300-051	SINGLE CARTON
	DuraLED® PRIME Stop/Rear Position Lamp with DT Connector	2SB 350 300-061	
	DuraLED® PRIME Stop/Rear Position Lamp (BULK)	2SB 350 300-057	BULK PACK OF 12
	DuraLED® PRIME Reversing Lamp	2ZR 350 300-071	SINGLE CARTON
	DuraLED® PRIME Reversing Lamp with DT Connector	2ZR 350 300-081	