



Jump Start Plug

Part No. HM7546P

Instructions

Please retain for future reference




Jump Start Plug

Part No. HM7546P


Instructions

Please retain for future reference


7. Put the retainer on.

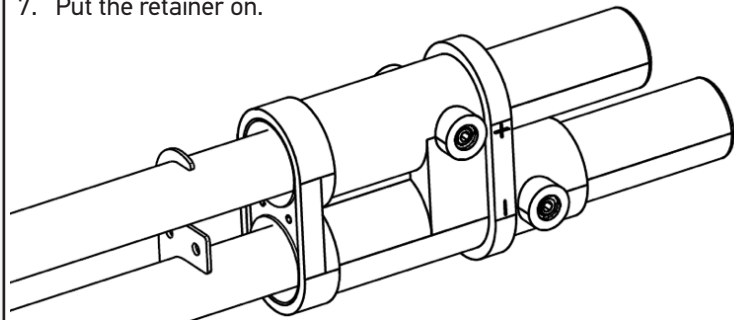


1. Remove all components from the packaging

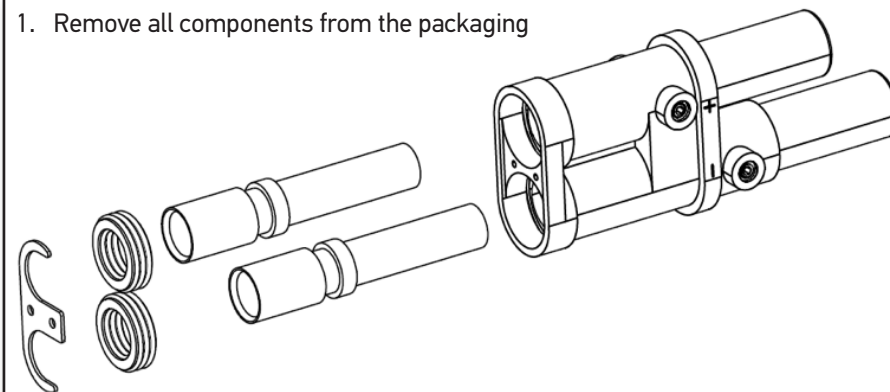

8. Secure retainer with 2 supplied screws & secure terminals with 4 supplied Allen head screws.

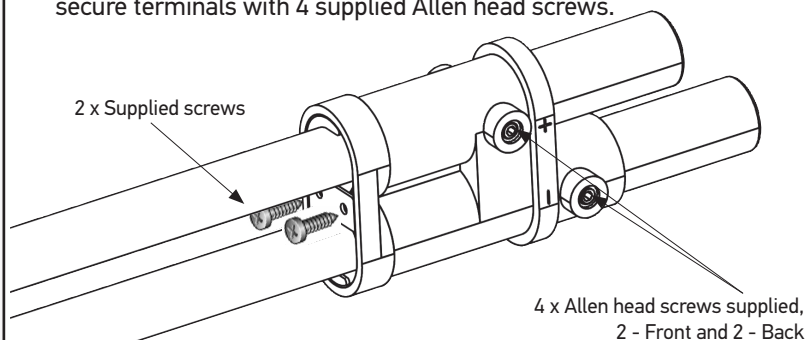

2. Strip Red (+) and black (-) 70mm² heavy duty welding cable (00 awg) 18mm from end.

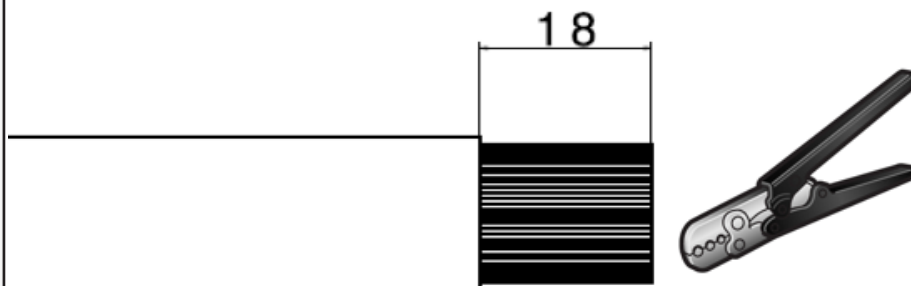



Jump Start Plug

Part No. HM7546P

Instructions

Please retain for future reference




Jump Start Plug

Part No. HM7546P


Instructions

Please retain for future reference


3. Insert cable in terminal.

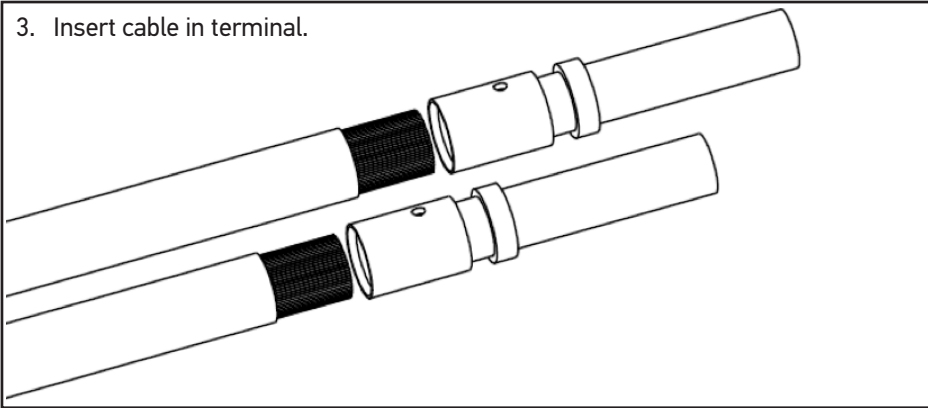

5. Solder through soldering holes on terminals.

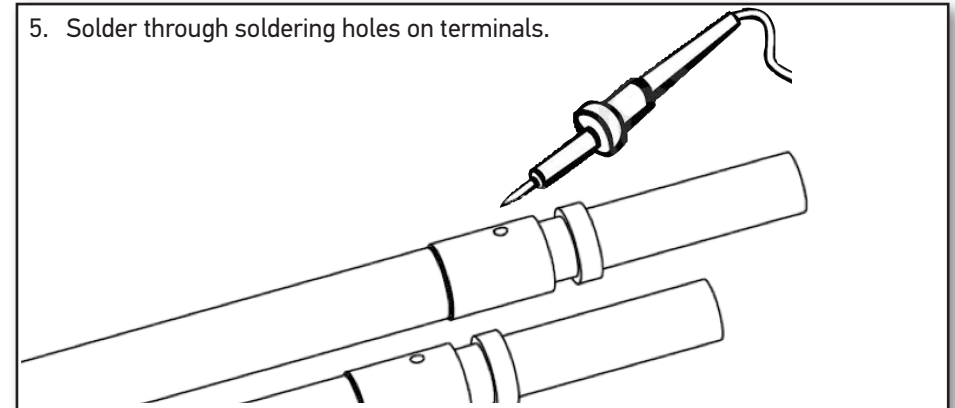

4. Crimp the terminals

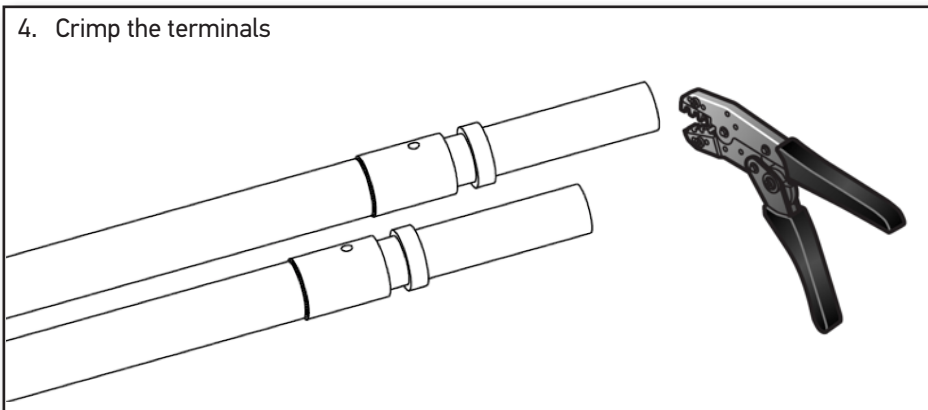

6. Insert rubber seal over cable and then insert the terminals to plug.

