



## BRIEF INFORMATION

### LED daytime running light –LEDayLine Zero

- LED daytime running light set for horizontal installation
- Compact design
- Includes mounting frames



## PRODUCT BENEFITS

The LED daytime running light LEDayLine Zero is best suited for vehicles with no angle at installation location. After fixing the mounting frame to the vehicle, the daytime running light is simply locked into place in the frame. The compact design can be integrated harmoniously into the vehicle and is ideal for retrofitting.

The special signal image of daytime running lights is easier to recognise in road traffic during the day than standard dipped headlights, thus reducing the risk of accidents.


## TECHNICAL SPECIFICATIONS

- For horizontal installation
- 8 high-performance LEDs per daytime running light
- Suitable for vehicles with no angle at installation location
- 12 V and 24 V versions available
- Power consumption 2 W
- IP 6K7 / IP 6K9K
- High vibration resistance
- Polarity reversal protection
- ECE approved (SAE approval pending)



## CONTENTS OF PACKAGE

- 2 light modules
- 2 mounting frames
- 1 change-over relay
- Pre-assembled connection cable
- Mounting instructions

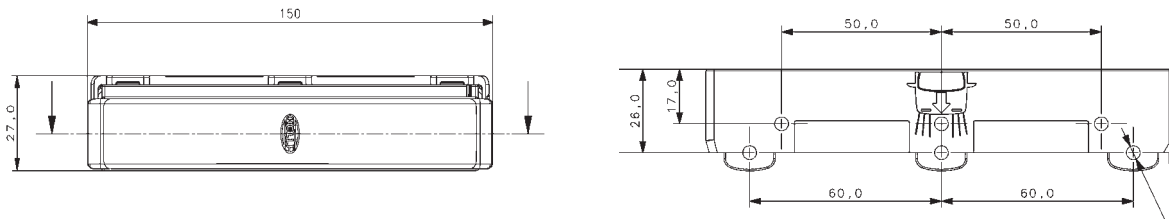
## DIMENSIONS



## RANGE OVERVIEW

Product image	Description	Part number
	12 V daytime running light	2PT 980 970-821
	24 V daytime running light	2PT 980 970-871

## ATTACHMENT REGULATIONS

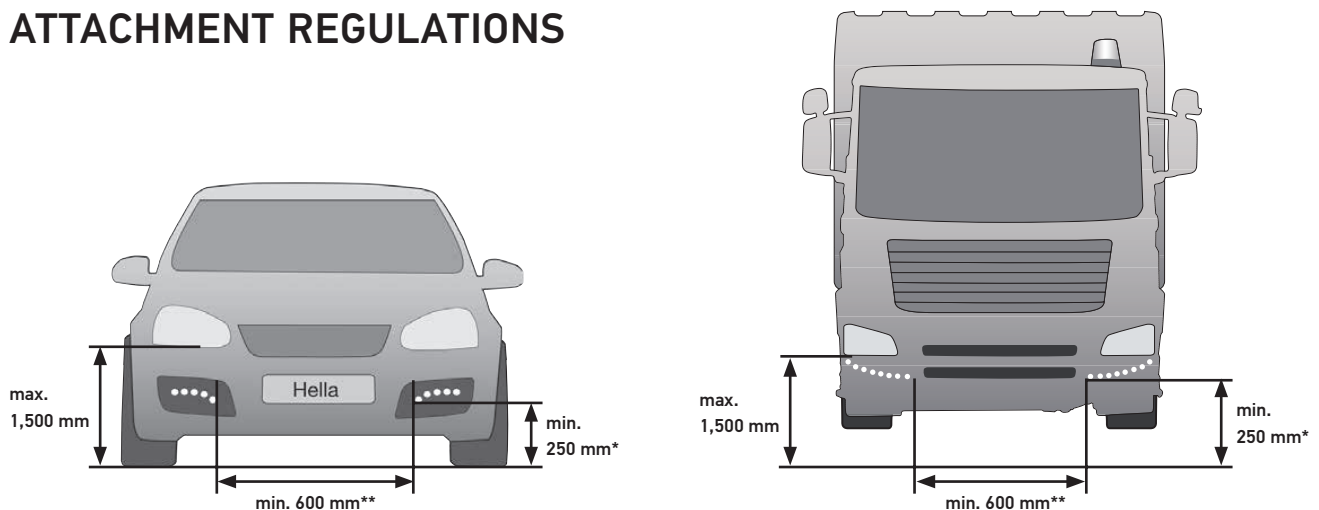

Legislation permits different attachment variations. However, the distances and beam angles to be adhered to are specified.

- \* When used as a position light, the minimum attachment height must be 350 mm and the maximum distance from the outside edge must be 400 mm.
- \*\* For vehicles with a width of <1,300 mm, the spacing distance must be at least 400 mm.
- When a daytime running light is used as a position light, the standard position light must be permanently disabled in accordance with ECE-R 48.
- For more information on legal stipulations and attachment regulations, consult the internet or a qualified garage.
- See the relevant assembly instructions for more detailed information.

min. = minimum distance  
max. = maximum distance