



BRIEF INFORMATION

HELLA VALUEFIT Master 1400 LED

- The new technological generation of the popular, rectangular master work lamp series for converting to LED
- With corrosion-free plastic housing in slim design without edges
- Available in two different bracket versions
- Straight-forward and convenient mounting thanks to square hole in bracket
- Robust and vibration-reducing mounting

PRODUCT FEATURES

The world-renowned "Master" work lamp series has been a synonym for quality, reliability and universal applicability for many years. The product specifications have been optimised for the new generation of rectangular HELLA VALUEFIT Master work lamps. Thus, with the lighting upgrade from halogen to LED technology, a slimmer appearance with a depth of 50.3 mm was also possible with otherwise almost identical dimensions.

The light output of the close-range lights is up to 1,350 lumen. The black housing of the work lamps is made of corrosion-free plastic. As a result, the work lamps are optimally protected against corrosion and can withstand even the toughest conditions.

The plastic housing also lowers the weight and provides better vibration resistance.

This HELLA VALUEFIT work lamp has been approved for installation on vehicles that must comply with ADR (GGVSEB) specifications.

LED work lamps are completely maintenance-free and offer a significantly longer lifetime than the bulb of a halogen headlamp.

HELLA VALUEFIT products are safe and reliable and enable a cost-effective changeover to LED technology.




TECHNICAL DETAILS




Technical data

| | |
|----------------------|--------------------------------|
| Rated voltage | Multi voltage |
| Operating voltage | 12 V / 24 V |
| Current consumption | 1.4 A (12 V)/0.8 A (24 V) |
| Power consumption | Max. 18 W (1,350 lm) |
| Light function | Close-range |
| Light source | LED |
| Colour temperature | 6,500 K |
| Material | Corrosion-free plastic housing |
| Weight | 450 g |
| Temperature range | -40°C to +50°C |
| Degree of protection | IP 6K7, IP 6K9K |
| Type approval | ECE-R10, UKCA, ADR / GGVSEB |
| Mounting | Upright or pendant |
| Connection | 500 mm cable with open end |

Dimensional sketch

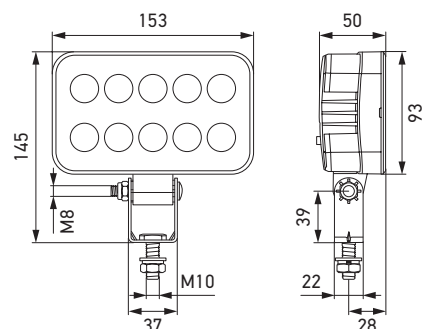


With long mounting bracket

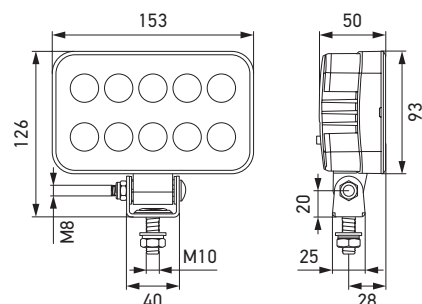

With short mounting bracket



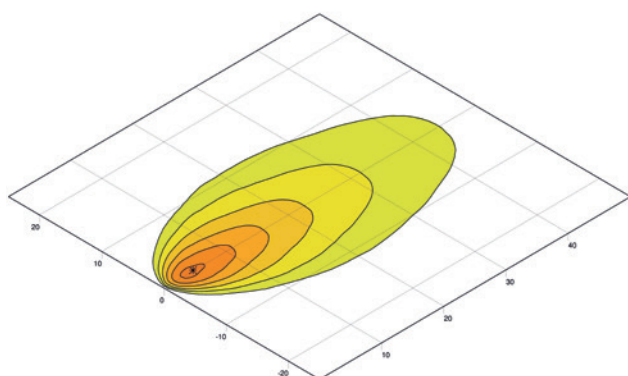

LIGHT DISTRIBUTION



Close-range illumination



PROGRAM OVERVIEW

| Product Image | Description | Illumination | Part Number | VPE* |
|---|-----------------------------|--------------------------|-----------------|------|
|  | With long mounting bracket | Close-range illumination | 1GA 357 060-001 | 1 |
|  | With short mounting bracket | | 1GA 357 877-001 | 1 |
| Recommended accessories (not included) | | | | |
|  | Fuse, 12 V, 3 A | | 8JS 711 683-821 | 1 |
|  | Fuse, 24 V, 2 A | | 8JS 711 683-841 | 1 |

* Packaging unit

Tip

The new HELLA VALUEFIT LED work lamps are particularly suitable for replacing the following HELLA halogen work lamps with identical bracket dimensions:

HELLA VALUEFIT MASTER 1GA 357 060-001: 005 060-001
Bracket (long) 128 890-00...

HELLA VALUEFIT MASTER 1GA 357 877-001: 006 876-001
Bracket (short) 993 341-60...

Product features, specifications and availability are subject to change without notice.

HELLA Automotive Sales, Inc.

611 Highway 74 S, Suite 102
Peachtree City, GA, 30269
Tel.: +1 (877) 224-3552
Fax: +1 (770) 631-7574
www.hella.com/us/
www.myhellalights.com