



PRODUCT INFORMATION

HELLA X-TREME LED cubes 4.3" and 3.6" sets

- Auxiliary headlamp with innovative "X" LED position light in white or amber
- White: For use on public roads
- Amber: For individual, attention-grabbing vehicle styling (off-road use)
- In two sizes and designs with shallow mounting depth
- Remarkable 7,100 lumen output

PRODUCT FEATURES

Innovative LED position light
in white or amber

Resilient aluminium housing



High resistant polycarbonate lens (PVC)

- Bright auxiliary high beam headlamp with striking design makes a statement on any vehicle
- The innovative design of the LED position light with razor-sharp contour supports the characteristic look of the new X-Treme series
- White position light for use as an auxiliary high beam headlamp on public roads
- Amber position light for use off the public roads
- The 4.3" model goes a step further with a lateral position light that doubles as a side signal
- Ideal for mounting on off-road vehicles, trucks and SUVs
- High-quality, robust auxiliary headlamp with aluminium housing
- Resilient mounting with black screw
- Multi-voltage: suitable for 12 V and 24 V rated voltage
- ECE type-approved
- 40 LEDs in the 4.3" version; 28 LEDs in the 3.6" version
- Electromagnetic compatibility (ECE R10 EMC)

Versions

- X-Treme Cube 3.6" and 4.3" with LED position light in white/amber with combo light or spot light or flood light
- X-Treme Cube 3.6" and 4.3" with LED position light and amber lens

TECHNICAL DETAILS


X-TREME XT-3 (3.6 INCHES)



Technical data		Dimensional sketch
Rated voltage	Multi-voltage	
Operating voltage	12–24 V DC	
Power consumption	60 W	
Light function	Auxiliary high beam headlamp and PO light	
Light source	LED	
Colour temperature	5,700 K (headlamp) / 3,000 K (Amber)	
Material	Housing: Aluminum Bezel: Plastic (ABS) Lens: PC (Polycarbonate) Bracket: Aluminum	
Housing colour	Black	
Weight	1,200 g	
Temperature range	Ambient temperature: -30 °C to +60 °C Storage temperature: -40 °C to +80 °C	
Degree of protection	IP 69K, IP 67	
Type approval	ECE R10 (EMC), CISPR25 Class 3	
Number of LEDs	28	
Mounting	Upright	
Connection	3.14" (80 mm) cable with open ends	
Application	Trucks, SUVs, off-road vehicles, off-roaders	


The AMBER position light does not have ECE approval: use may be limited to off-road areas off the public roads according to local regulations (see installation instructions).

Dimensional sketch

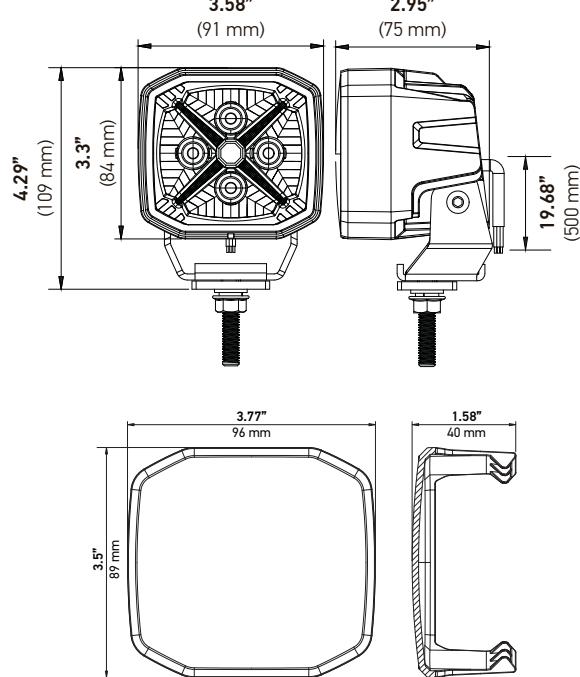


Stone Shield Included

DRIVING LIGHTS + POSITION LIGHT FUNCTION



DRIVING LIGHT
POSITION LIGHT



DRIVING LIGHT
POSITION LIGHT

PROGRAM OVERVIEW

Product Image	Variant	Description	Position Light Colour	Part Number
	HELLA X-TREME 3.6" LED Cubes	XT-3C Set with Combo beam		358233831
		XT-3S Set with Spot beam	White or amber (connection optional)	358233841
		XT-3F Set with Flood Beam		358233851
	HELLA X-TREME 3.6" LED Cubes - Amber	XT-3A Amber lens with Spot Beam	White or amber (connection optional)	358233941

TECHNICAL DETAILS


X-TREME XT-4 (4.3 INCHES)



Technical data	
Rated voltage	Multi-voltage
Operating voltage	12–24 V DC
Power consumption	60 W
Light function	Auxiliary high beam headlamp and PO light + Lateral position light
Light source	LED
Colour temperature	5,700 K (headlamp) / 3,000 K (Amber)
Material	Housing: Aluminum Bezel: Plastic (ABS) Lens: PC (Polycarbonate) Bracket: Aluminum
Housing colour	Black
Weight	1,200 g
Temperature range	Ambient temperature: -30 °C to +60 °C Storage temperature: -40 °C to +80 °C
Degree of protection	IP 69K, IP 67
Type approval	ECE R10 (EMC), CISPR25 Class 3
Number of LEDs	40
Mounting	Upright
Connection	3.14" (80 mm) cable with open ends
Application	Trucks, SUVs, off-road vehicles, off-roaders


The AMBER position light does not have ECE approval: use may be limited to off-road areas off the public roads according to local regulations (see installation instructions).

Dimensional sketch

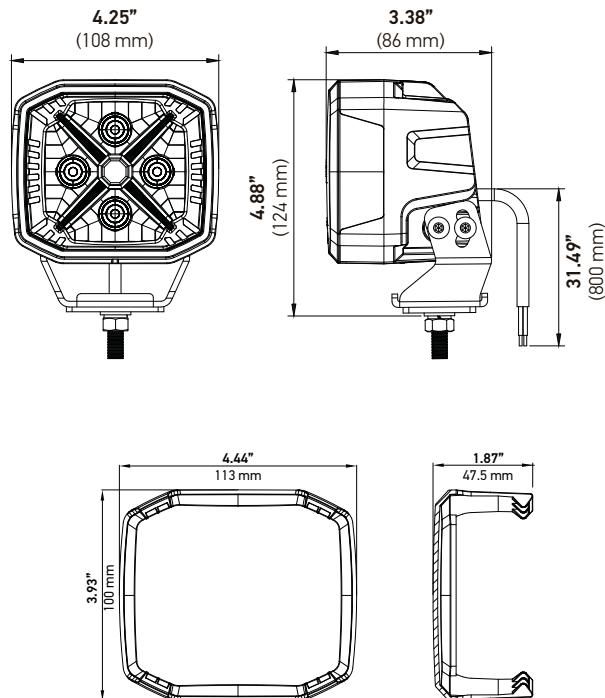


Stone Shield Included

DRIVING LIGHTS + POSITION LIGHT FUNCTION



DRIVING
LIGHT



POSITION
LIGHT


PROGRAM OVERVIEW

Product Image	Variant	Description	Position Light Colour	Part Number
	HELLA X-TREME 4.3" LED Cubes	XT-4C Set with Combo beam with lateral position light		358233801
		XT-4S Set with Spot beam with lateral position light	White or amber (connection optional)	358233811
		XT-4F Set with Flood Beam with lateral position light		358233821
	HELLA X-TREME 4.3" LED Cubes - Amber	XT-4A Amber lens with Spot Beam with lateral position light	White or amber (connection optional)	358233921


ILLUMINATION

The light distribution shows two operational headlamps.


HELLA X-Treme 3.6 inch - Combo

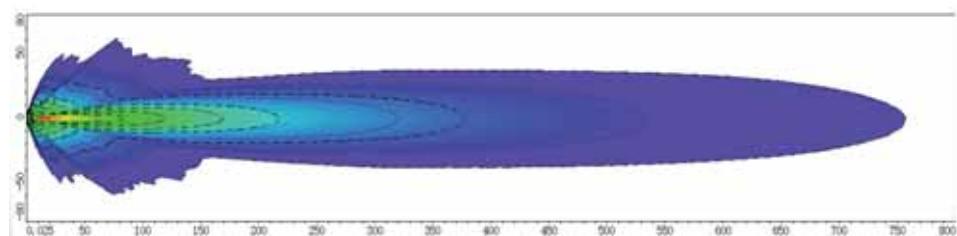


HELLA X-Treme 3.6 inch - Spot

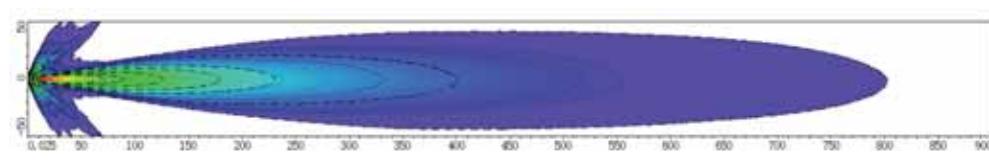

HELLA X-Treme 3.6 inch - Flood

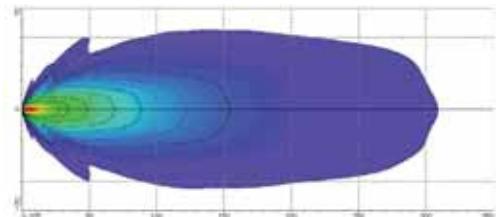


HELLA X-Treme 3.6 inch - Amber - Spot

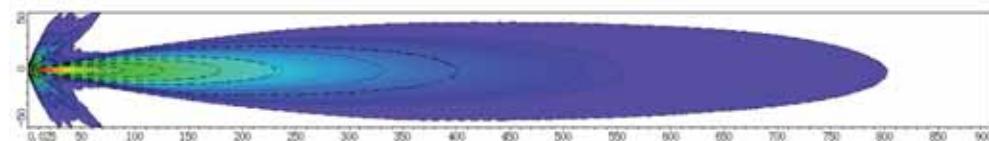


ILLUMINATION

The light distribution shows two operational headlamps.


HELLA X-Treme 4.3 inch - Combo

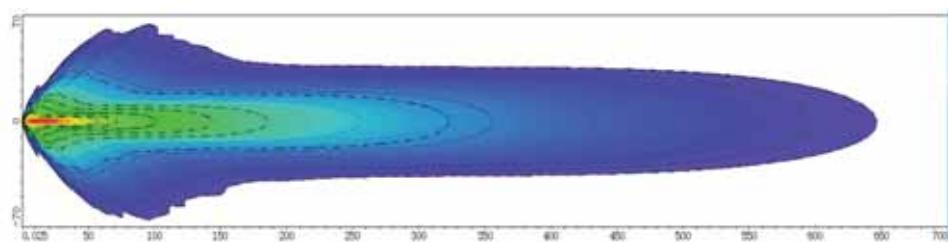


HELLA X-Treme 4.3 inch - Spot

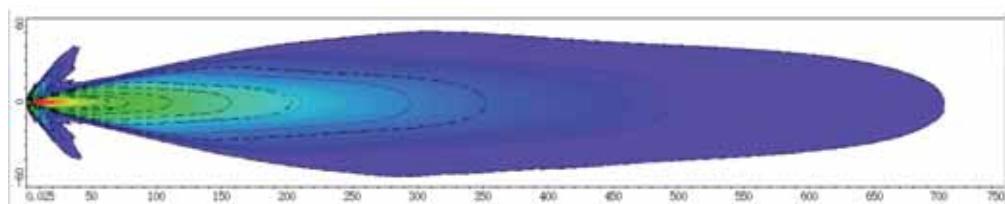

HELLA X-Treme 4.3 inch - Flood

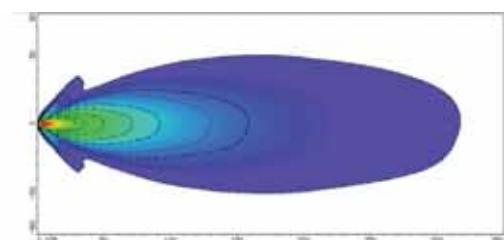

HELLA X-Treme 4.3 inch - Amber - Spot

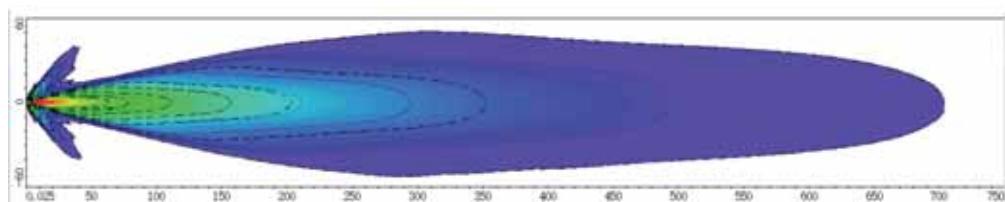

ACCESSORIES

Product Image	Description	Part Number
	HELLA X-TREME XT-3 (3.6 inch), amber cover	358233961
	HELLA X-TREME XT-47 (4.3 inch), amber cover	358233951
	HELLA X-TREME XT-3 (3.6 inch), smoked cover	358233981
	HELLA X-TREME XT-4 (4.3 inch), smoked cover	358233971

In some countries, protective caps are not permitted by law. Before using them on public roads, please check with the relevant government authority.

APPLICATION EXAMPLES

