

HELLA BEACONS / OPTICAL WARNING SYSTEMS - PRODUCT RANGE

LED

ROTALED LED Warning Beacon


NEW!

SPECIFICATIONS

Part Number	2RL-010979-001
Short Code	A9791A
Bulb Type	8 High Power LEDs
Rated Voltage	12 V / 24V
Mounting type	Fixed
Lens	Polycarbonate lens

Rotating LED light function.
Low current consumption, high efficiency.

● Amber




ROTACOMPACT

SPECIFICATIONS

Part Number	2RL-009506-211
Short Code	A6211A
Bulb Type	H1
Rated Voltage	24 V
Mounting type	Fixed
Lens	Polycarbonate lens

Compact rotating beacon for heavy duty applications.

● Amber




HALOGEN

KL ROTAFLEX FL

SPECIFICATIONS

Part Number	2RL-006846-011
Short Code	A4602
Bulb Type	H1
Rated Voltage	24 V
Mounting type	Pipe-neck
Lens	Polycarbonate lens

● Amber



KL900 ROTATING BEACON


SPECIFICATIONS

Part Number	2RL-923111-001
Short Code	A8125A
Bulb Type	P21W / R10W
Rated Voltage	12 V
Mounting type	Fixed
Lens	Polycarbonate lens

AVAILABLE IN 24 V

Part Number	2RL-923111-031
Short Code	A8126A

● Amber



HALOGEN

www.hella.co.za

You can find more information about
HELLA Worklights and beacons online at:

www.facebook.com/hellasouthafrica



Follow us on:

Photograph for illustrative purposes.

Safety, quality, innovation and
productivity factors applied.

HELLA Automotive South Africa (Pty) Ltd.
P O Box 6130
Moseville, Uitenhage,
SOUTH AFRICA
6230
Sales Telephone: + 27 (0) 41 996-5700
Sales Telefax: + 27 (0) 41 996-5720
www.hella.co.za
© HELLA KGAA Hueck & Co., Lipstadt
P/N: Z9021 05.2012
Printed in South Africa



WORKLIGHTS
BEACONS
PRODUCT RANGE

HELLA WORKLIGHTS - PRODUCT RANGE

LED


AS 5000 LED

NEW !

SPECIFICATIONS

Part Number	1HA-001500-001
Short Code	HM1500WB
Bulb Type	24 High Power LEDs
Rated Voltage	Multi-voltage 9-33V
Light Output	5000 lumen
Lens	Grilamid® lens
Rated Capacity	60 W

Heavy duty LED worklight. Wide beam.
Also available as 220V version.

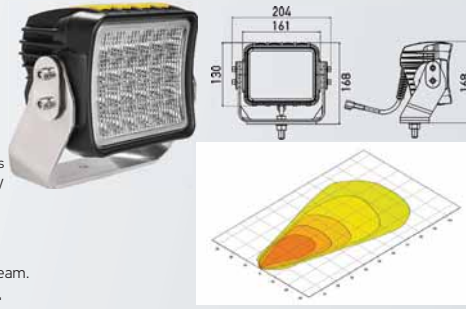

POWER BEAM 2000 LED

SPECIFICATIONS

Part Number	1GA-996189-001
Short Code	A6189
Bulb Type	16 LEDs
Rated Voltage	Multi-voltage 9-33V
Light Output	2200 lumen
Lens	Nylon
Rated Capacity	43 W

Top product for illuminating the surrounding area up to 50 m in distance at work site.




POWER BEAM 3000 LED

SPECIFICATIONS

Part Number	1GA-996192-021
Short Code	A6192
Bulb Type	16 LEDs
Rated Voltage	Multi-voltage 9-33V
Light Output	2700 lumen
Lens	Nylon
Rated Capacity	43 W

Top product for illuminating the surrounding area up to 300 m in distance at work site.

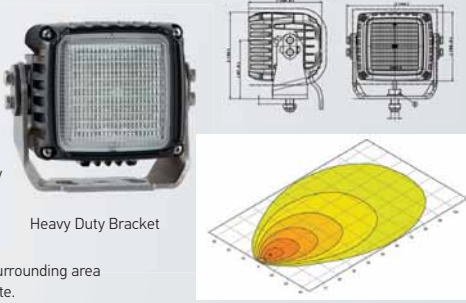


POWER BEAM 1000 LED

SPECIFICATIONS

Part Number	1GA-996188-001
Short Code	A6188
Bulb Type	6 LEDs
Rated Voltage	Multi-voltage 9-33V
Light Output	850 lumen
Lens	Glass
Rated Capacity	18 W

For close-range illumination.

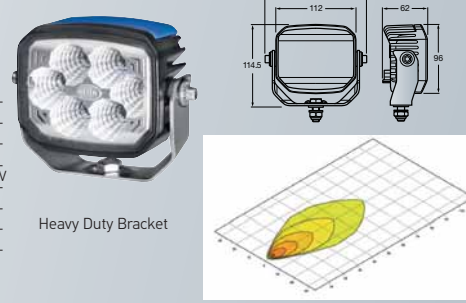


LED

MODUL 70 LED GENERATION II

SPECIFICATIONS

Part Number	1GA-996176-721
Short Code	A6176-3
Bulb Type	4 LEDs
Rated Voltage	Multi-voltage 9-33V
Light Output	600 lumen
Lens	Glass
Rated Capacity	13 W

For close-range illumination.

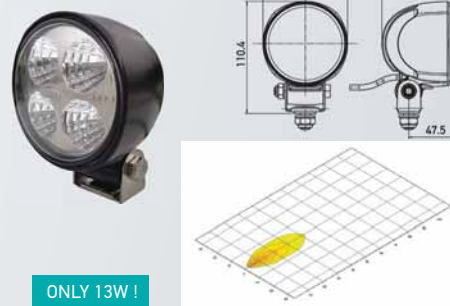

ONLY 13W !

MEGA BEAM LED GENERATION II

SPECIFICATIONS

Part Number	1GM-996136-191
Short Code	A6138
Bulb Type	4 LEDs
Rated Voltage	Multi-voltage 9-33V
Light Output	600 lumen
Lens	Glass
Rated Capacity	13 W

For close-range illumination.



ONLY 13W !


XENON

AS400 XENON

SPECIFICATIONS

Part Number	1GA-996242-111
Short Code	A6242
Bulb Type	D1S
Rated Voltage	24V
Lens	Glass
Rated Capacity	42 W

Top product - universal worklight for all kinds of task. Long-range, broad illumination of the surrounding area up to 50 m in distance at the work site.

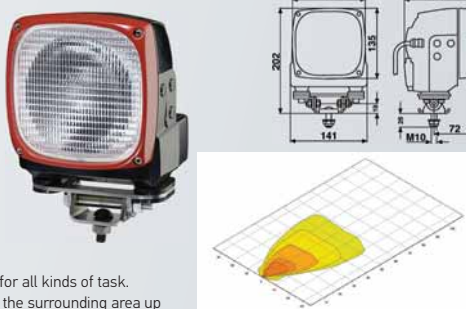

AS200 XENON - 24 V GROUND ILLUMINATION

SPECIFICATIONS

Part Number	1GA-996142-011
Short Code	A6142-2
Bulb Type	D2S
Rated Voltage	24 V
Lens	Glass
Rated Capacity	42 W

ALSO AVAILABLE IN 12 V

Part Number	1GA-996142-001
Short Code	A6142-1

For close-range illumination.



HALOGEN

ULTRA BEAM S GROUND ILLUMINATION

SPECIFICATIONS

Part Number	1GA007506-001
Short Code	A7506-1
Bulb Type	H3
Rated Voltage	12 V / 24 V
Lens	Glass
Rated Capacity	55 W / 70 W

The classic standard worklight for close-range illumination.



OVAL 100 H3 SINGLE REFLECTOR

SPECIFICATIONS

Part Number	1GA-996161-121
Short Code	A6161-1
Bulb Type	H3
Rated Voltage	12 V
Lens	Glass
Rated Capacity	55 W

For close-range illumination.



OVAL 100 H3 DOUBLE REFLECTOR

SPECIFICATIONS

Part Number	1GA-996161-291
Short Code	A6161-3
Bulb Type	2 x H3
Rated Voltage	12V
Lens	Glass
Rated Capacity	110 W

For close-range illumination.



MATADOR

SPECIFICATIONS

Part Number	1G4-003470-031
Short Code	A2926
Bulb Type	H3
Rated Voltage	12 V / 24 V
Lens	Glass
Rated Capacity	55 W / 70 W

For close-range illumination.



Lux is the unit used to measure light.

This indicates the luminous flux which is projected by the light source onto a certain surface. For example; an office should be illuminated with at least 500 Lux and the human eye can still read a newspaper without any problems at 1 Lux. The values under the Lux axis show where the respective illumination intensities are achieved in the light distribution diagrams. The Isolux diagrams show a comparison of light distributions, where a single block represents 10 meters in distance.

Lux: 32 16 8 4 2 1 0

The red-orange colouring marks the area with high illumination intensity.