






RELAYS AND RELAY DEVICES PRODUCTS AND APPLICATIONS

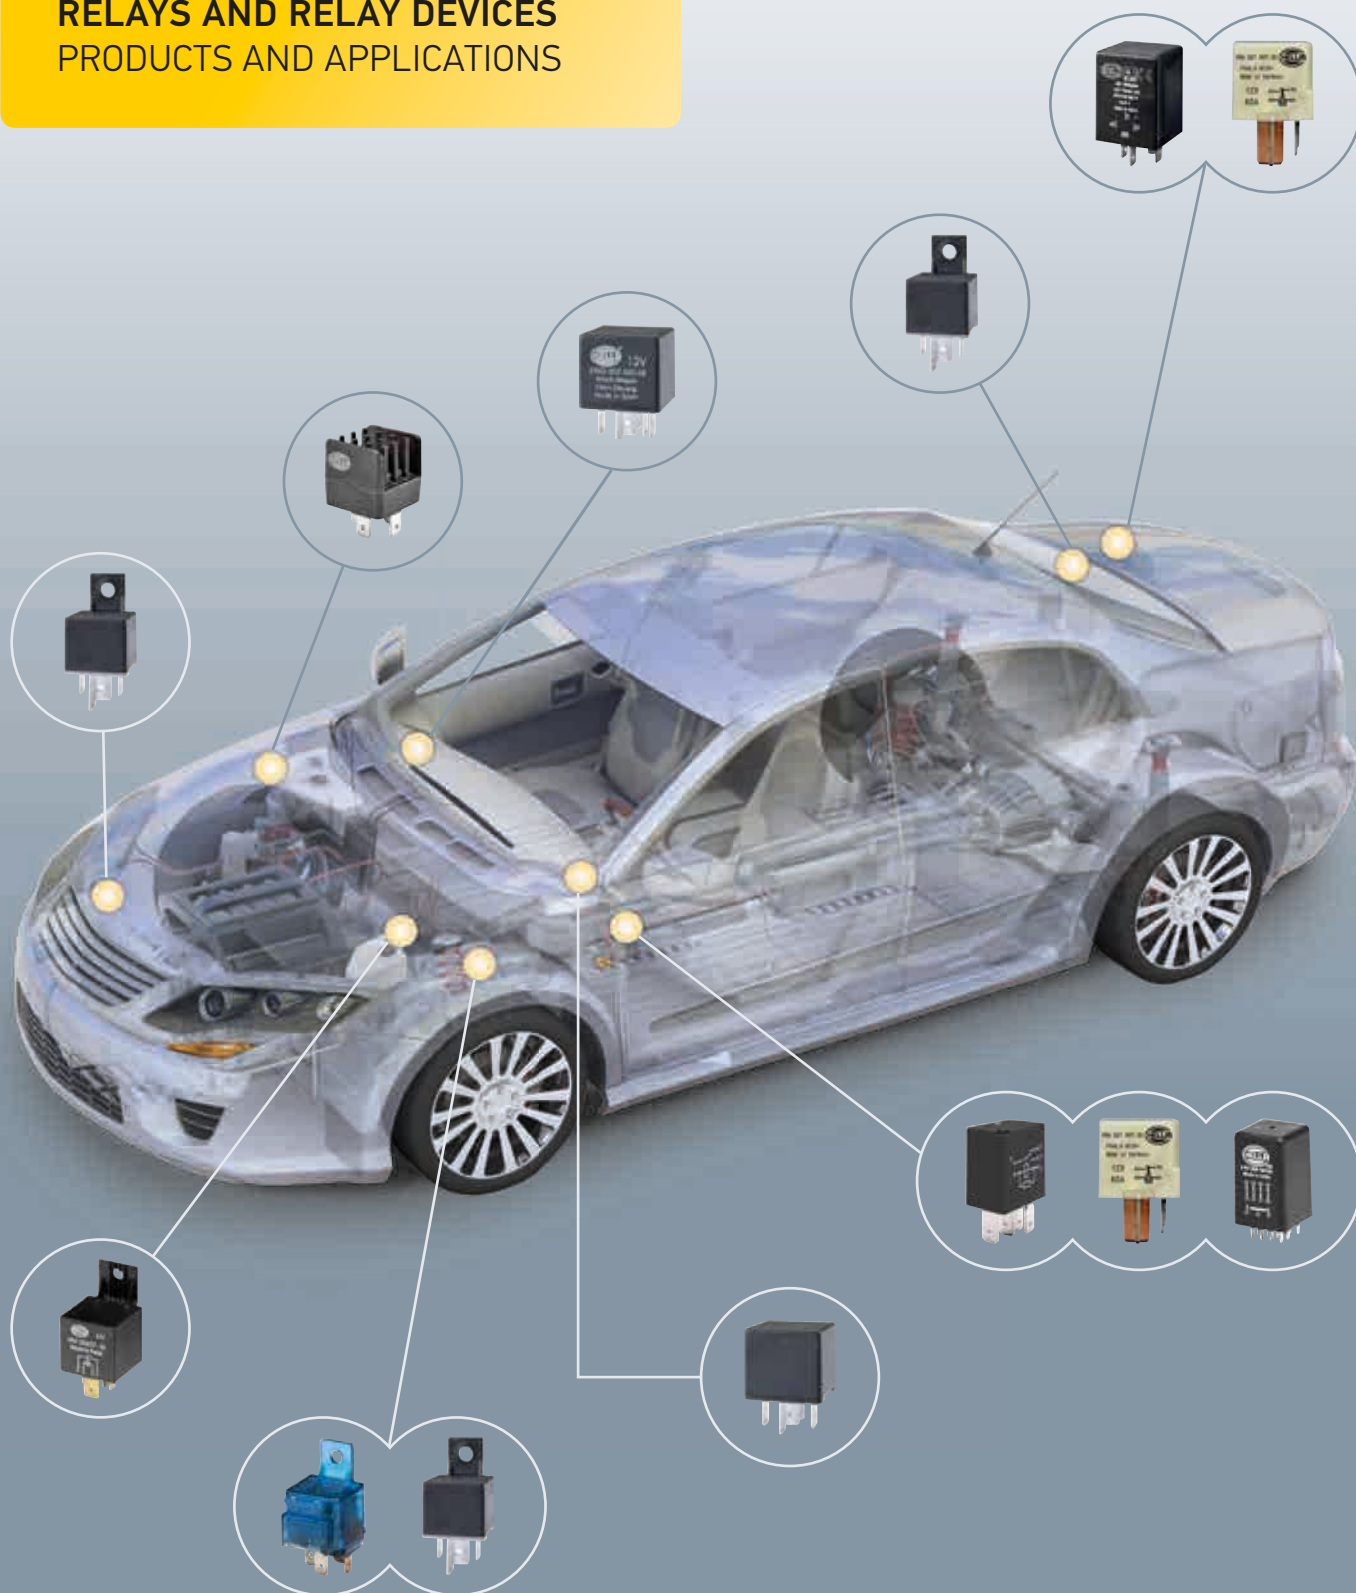

HELLA'S LITTLE HEROES

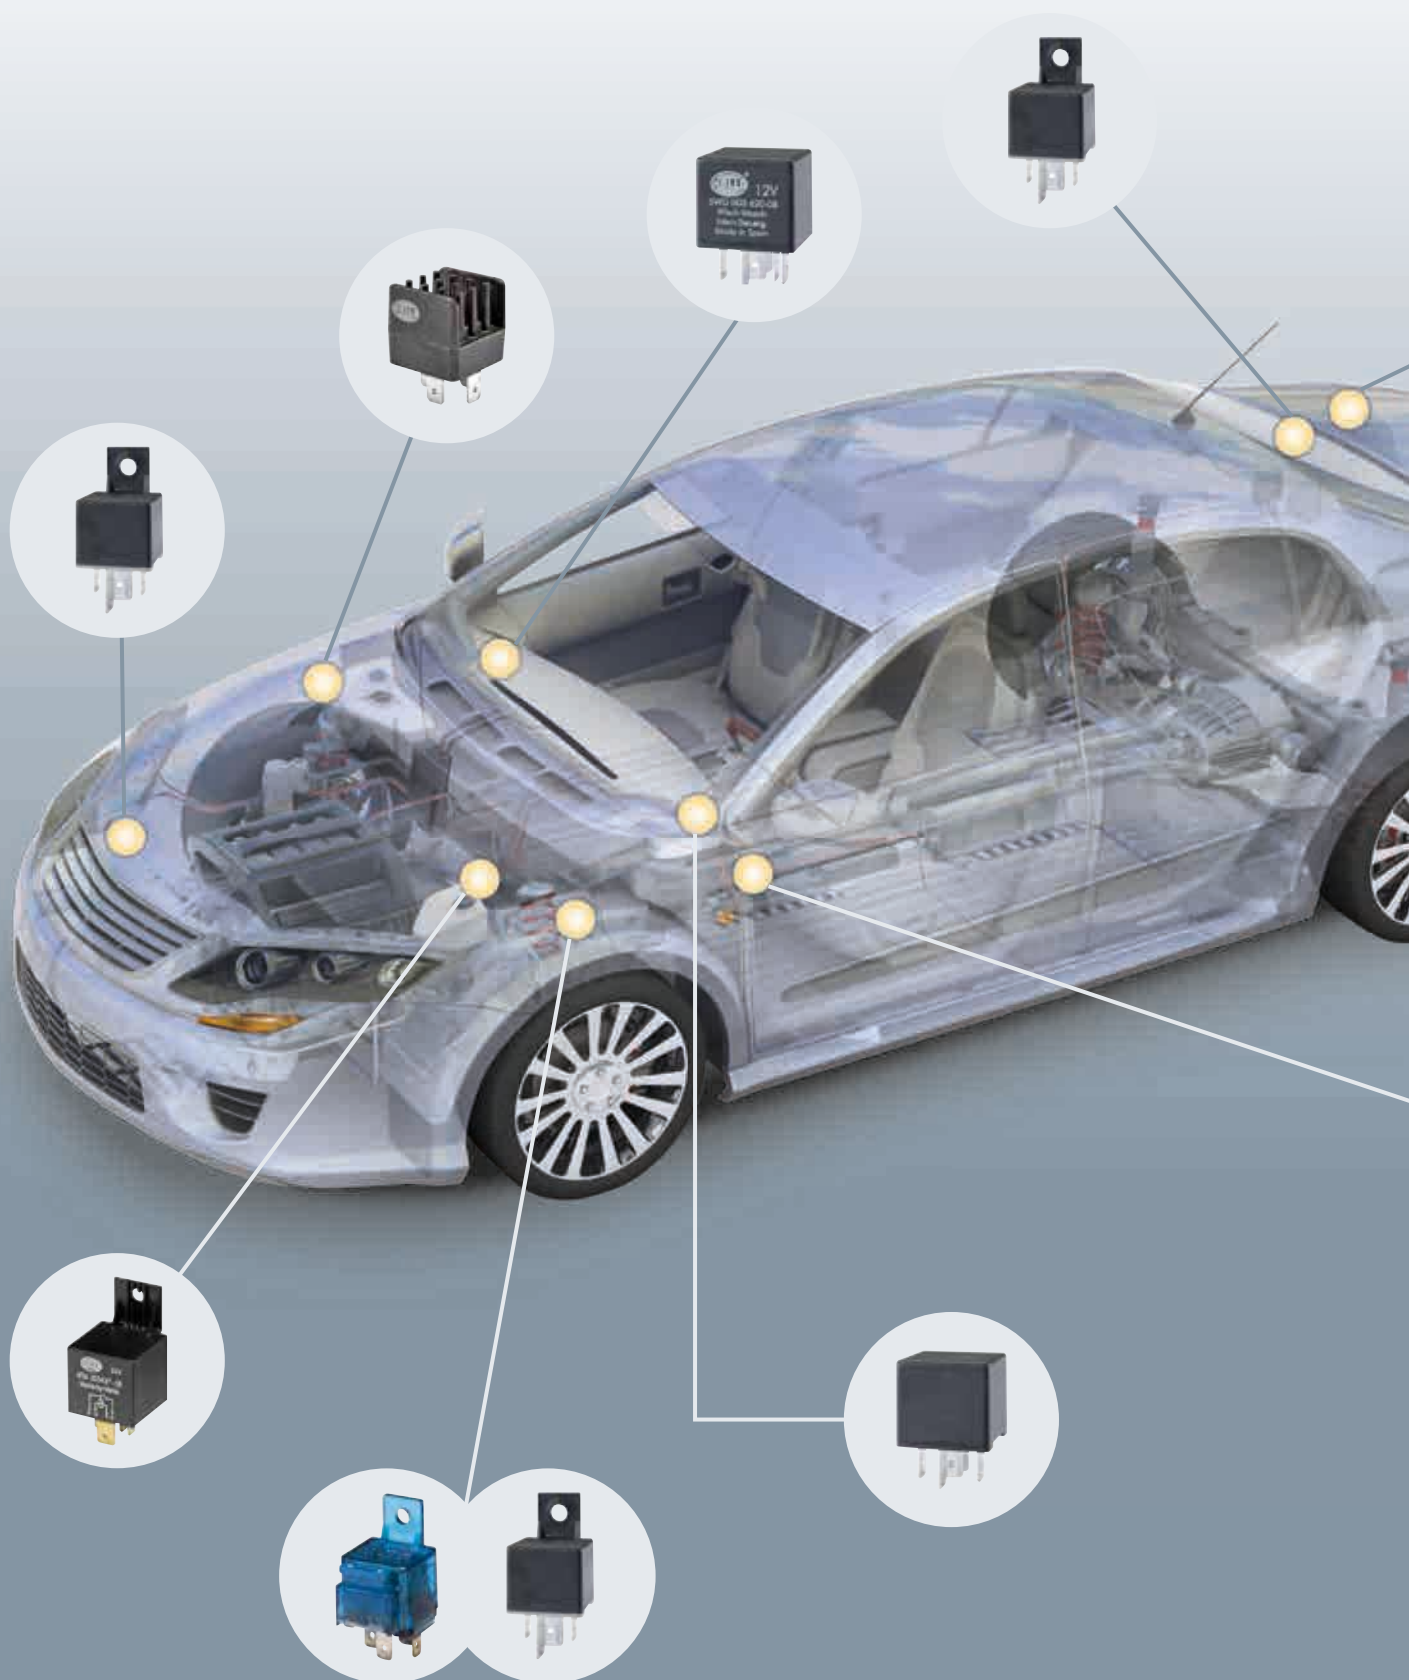

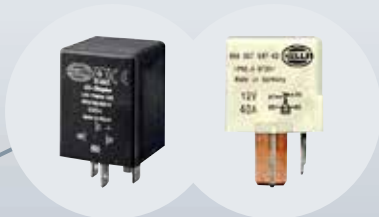

INTRODUCTION	2
A small component with a big history	4
How HELLA checks and ensures quality	7
ELECTROMECHANICAL RELAYS	8
Explanation and uses	8
Relay types	12
MINI RELAY	13
Mini relay – normally-open relay 12 V, with bracket	13
Mini relay – normally-open relay 12 V, without bracket	15
Mini relay – normally-open relay 24 V, with bracket	17
Mini relay – normally-open relay 24 V, without bracket	18
Mini relay – change-over relay 12 V, with bracket	20
Mini relay – change-over relay 12 V, without bracket	22
Mini relay – change-over relay 24 V, with bracket	25
Mini relay – change-over relay 24 V, without bracket	26
MICRO RELAY	28
Micro relay – normally-open relay / change-over relay 12 V, without bracket	28
Micro relay – change-over relay 24 V, without bracket	29
HIGH POWER RELAY	30
High-power relay – normally open relay 12 V, with / without bracket	30
High-power relay – normally open relay 24 V, with / without bracket	31
BATTERY DISCONNECT RELAY / SOLID STATE RELAY	32
Battery disconnect relay / solid state relay 12 V	32
Summary of battery disconnect and solid state relays	33
TECHNICAL DATA	34
Technical data of the relays – Overview	34
Climatic and mechanical tests	36
FLASHER UNITS	38
Explanation and uses	38
Test circuits	42
Flasher Unit 6 V / 12 V, with bracket	44
Flasher Unit 12 V, without bracket	47
Flasher Unit 24 V, with bracket	49
Flasher Unit 24 V, without bracket	51
LED flasher unit 9 – 33 V / 12 V / 24 V	52
Overview of flasher unit technical data	54
LED indicators and failure control from HELLA	55
The right solution for your vehicle electronics	56
WASH / WIPE INTERVAL CONTROL UNITS	58
Explanation and uses	58
Wash-wipe control unit 12 V	60
Wash-wipe control unit 24 V	61
Headlight cleaning system 12 V / 24 V	62
Wipe-wash interval switch 12 V / 24 V	63
GLOW PLUG SYSTEM CONTROL UNITS	64
Explanation and uses	64
Preglow relay 12 V	66
TIME CONTROL UNITS	74
Explanation and uses	74
Time Control Unit 12 V	76
Time Control Unit 24 V	77
RELAY FUEL PUMP	78
Explanation and uses	78
Relay Fuel Pump 12 V	79
ACCESSORIES	80
Overview	80

Relays have been used to remotely control circuits for over 180 years. The technology has proven its reliability millions of times and is today still the first choice for many applications, such as in automotive engineering.

From the telegraph to automotive engineering


- The relay owes its name to former times when mail was still carried by horse. At what were known as relay stations, post riders could swap their horses for rested ones. Today, we call an electromagnetic, remotely operated switch a relay.
- The American physician Joseph Henry invented the electric relay in 1835. The pioneer in communications engineering used it to send messages from his laboratory to his home. Relays were first used on a larger scale in 1837, as signal amplifiers for Samuel Morse's recording telegraphs. They would later make possible the widespread use of telephones and became a cornerstone of safety in railway engineering. In 1941, Konrad Zuse utilised 2,000 relays in his legendary Z3, the first digital computer. HELLA produced its first automotive relay in 1960.
- As electronics matured in the 20th century, the age of the relay was often seen as over; nevertheless, they retain a place in specific applications. The automotive industry, for example, needs relays, since relay functions cannot always be replaced by control units. Relays make galvanic isolation possible between input and output. Semi-conductors cannot manage this at the moment. The cost advantage relays have over electronic solutions is also unbeatable.
- Relays are used in automotive engineering to switch high currents. The engine control unit, for example, is switched by a relay. Because relays are robust and not particularly susceptible to failure, they can be installed near electric devices. They require only low control currents, making small line cross-sections sufficient. The switching and amplifier function of a relay could only be achieved with a lot more effort and a lot less reliability using more "modern" electronics. Another benefit of the relay is that it is quick and easy to replace. These positive characteristics are the reason why relays are still in use. And they ensure that, in the future, relays will still be at home in many vehicles.

Quality relays from HELLA – versatile and reliable

- **Manufacturing expertise:**
HELLA produces more than 100 million units per year at its own facilities – thanks to optimised production at an attractive price and with one of the lowest failure rates in the entire industry.
- **Flexibility:**
Large volumes are produced in a fully automated process, small volumes with semi-automation. This means we are in a position to change over quickly to semi-automatic production. HELLA is able to respond promptly to customer requirements and create new variants in addition to its existing product range at short notice.
- **OEM customers:**
HELLA develops and produces relays for AGCO, Claas, Daimler AG, Ford, VW, GM, JCB, Opel/Vauxhall, Nissan, John Deere, Chrysler, Jaguar/Land Rover, BMW, Audi, Volvo, Renault, PSA and others. Many of our customer relationships have existed for decades.
- **Production locations:**
Xiamen (China).

1951	First hot-wire flasher unit
1960	A-relay with metal housing Mechanical threshold voltage controller for windshield wipers
1965	E-relay: the first fully electronic flasher unit
1968	L-relay: the first modular system
1969	Wipe/wash interval control unit
1970	K-relay: current controlled relay for direction indicator lamps Bi-stable relay for switching between low and high beam
1972	Q-relay with plastic base plate, also available with built-in fuse
1973	V-relay: PCB relay for automatic placement
1976	S1-relay: replacement for Q-relay. Can be produced fully automatically, also available with built-in fuse
1978	H-relay: high-power relay for different motor loads
1982	Sounding relay for controlling direction indicator lamps
1989	Round connector relay: specially produced for Daimler AG, with plastic housing
1994	Micro relay: designed for fully automated production
1998	Mini solid state relay
2003	Bi-stable battery disconnect relay with flexible attachment system
2005	Micro relay: high-current and bi-stable version
2006	Intelligent flasher units for active LED flashers with current pulse evaluation in acc. with ISO 13207-1
2008	Flasher unit with microprocessor technology
2012	New and refined relay products with lower power consumption to help reduce CO ₂ emissions
2013	CO ₂ -Relay
2015	40 A-Micro relay
2018	High current Mini-SSR
2019	48 V-battery-cut-off relay
2020	High-voltage relay



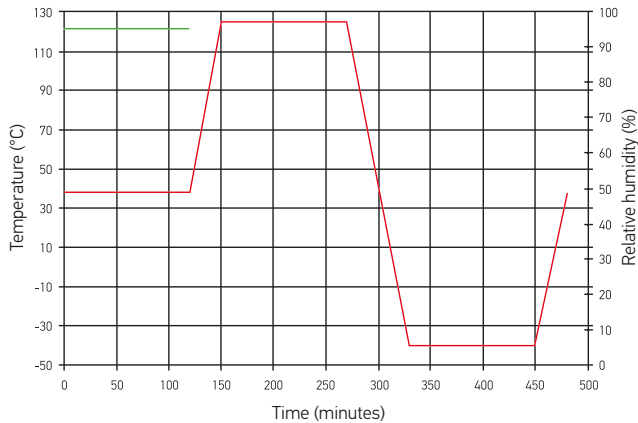

■ Design life tests:

The relays are switched on/off in cycles on fully automated test racks. Original loads or simulated resistive, inductive, capacitive or combined loads whose current characteristics are recorded as the original loads are connected.

In addition, the relays can be subjected to different ambient temperature ranges or temperature profiles. The test is continuously documented.

■ Electrical parameters:

Within the context of product release, starting voltage, dropout voltage, contact voltage drop, coil resistance and insulation resistance are tested, for example. Accompanying the manufacturing process, the electrical parameters are recorded at the end of the production process by end-of-line testers. These can be evaluated statistically. One important factor for guaranteeing the consistent high quality of the relays produced.

■ Environmental and mechanical tests:


Every relay has to pass tests such as the alternating temperature test, salt spray fog test, mechanical shock test or drop test and the vibration test within the context of the product release process. These tests are carried out using HELLA equipment.

■ Analytical tests:


Here, the materials used and the different connecting processes such as soldering and welding are tested. The tests are carried out randomly during incoming goods testing and following production.

■ Certificates:

Hella has been certified in a range of relevant areas e.g. DIN EN ISO 9001:2008, ISO / TS 16949:2009, ISO 14001. HELLA relays also comply with the ROHS (2002/95/EC) and REACH standards.

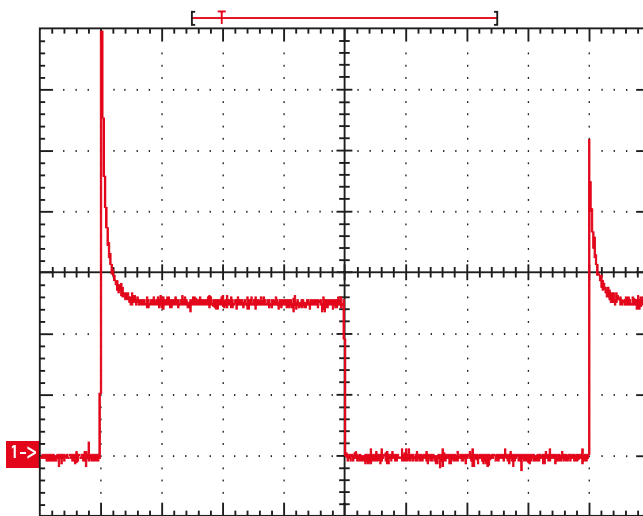


1) Load curve, 20 A resistive 10 A 500 ms

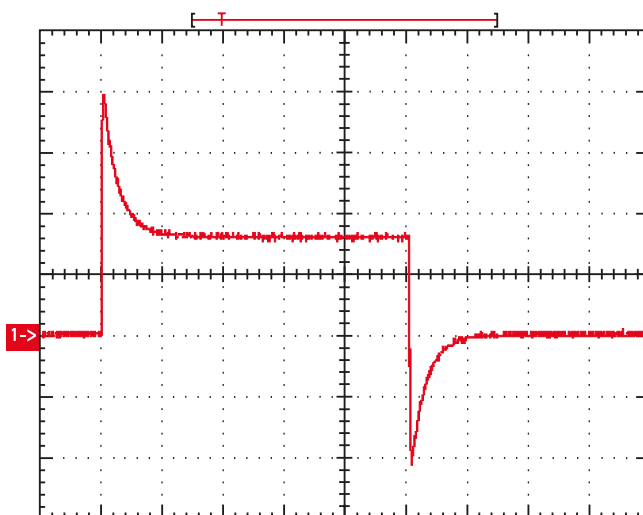


1) Load curve, 3 x high beam 10 A 500 ms

Key components of an electromechanical relay

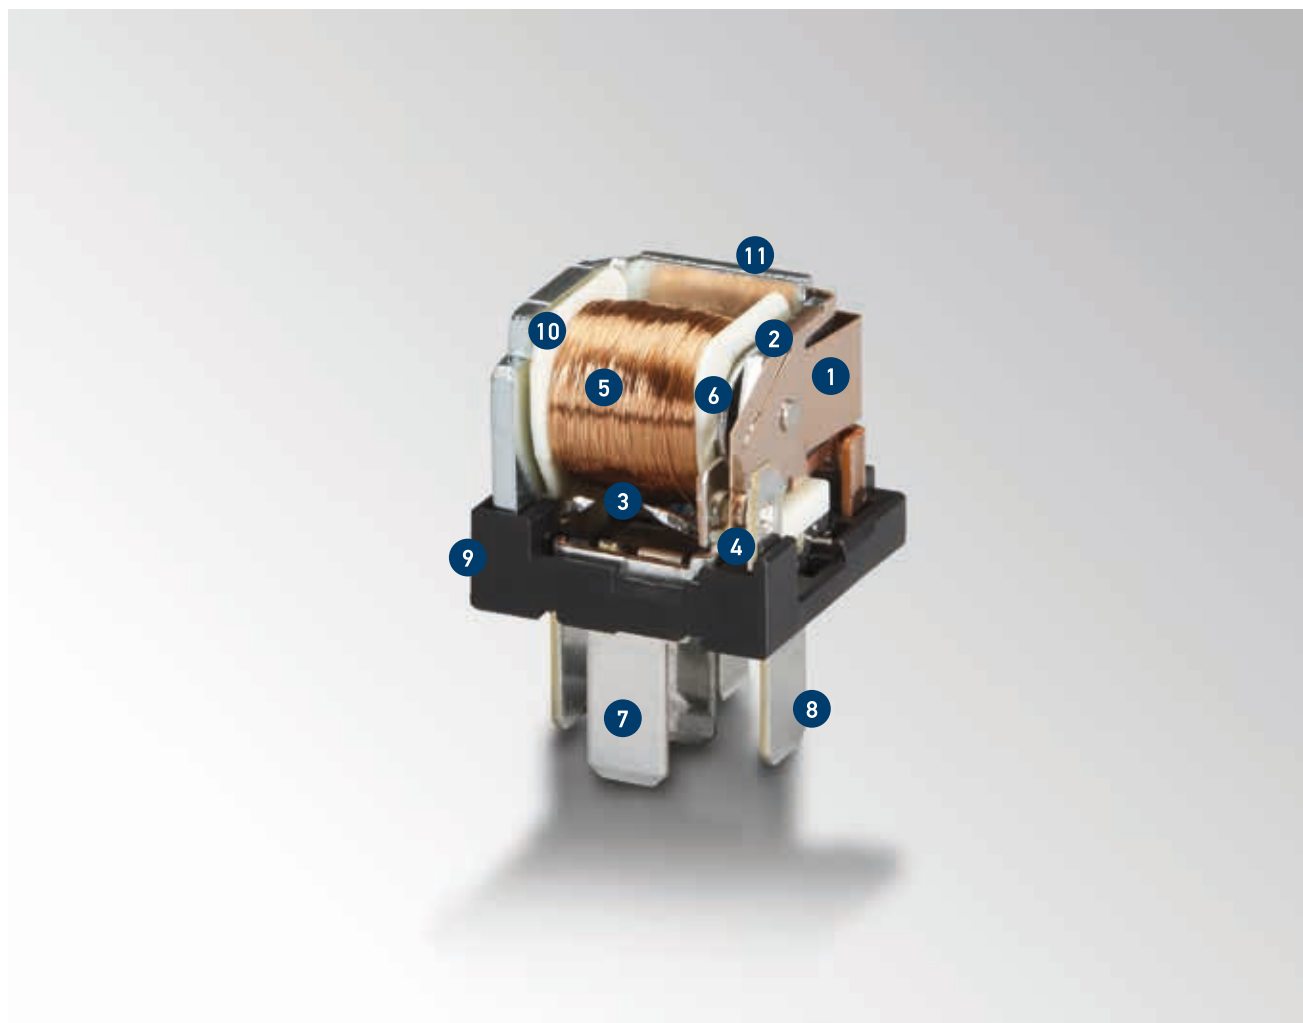

Legend

- | | |
|---------------------------|--|
| 1 Contact plates | 7 Blade terminal (load) made of E-Cu (electrolytic copper) with tin-plated surface |
| 2 Armature | 8 Blade terminal (coil) made of CuZn (brass) with tin-plated surface |
| 3 Pins for coil wire | 9 Base plate |
| 4 Switch contacts | 10 Coil body |
| 5 Coil made of Cu wire | 11 Yoke |
| 6 Iron core (in the coil) | |



Functional principle

Relays are basically electrically operated switches which use an electromagnet to move a switching mechanism by switching one or more contacts. They are used where one or more load circuits need to be switched on or off by means of a control signal. Characteristic of the electromechanical relay is the complete (galvanic) isolation between the control and controlled circuits.

Make relays

Make relays are used to close an electric circuit between a power source and one or more electrical loads, i.e. the loads are switched on. Relays are operated by means of switches, pulse generators or control devices. Typical vehicle applications are headlights, auxiliary lights and fog lights, horns, heaters, air conditioner systems, etc.

How make relays work

Fig.1) The control circuit (86/85) is inactive and the return spring keeps the armature open. The make contacts are open and the load circuit (30/87) is interrupted.

Fig. 2) The control circuit (86/85) is active and the copper coil induces a magnetic field which pulls the armature down onto the magnetic core. The make contacts are closed and the load circuit (30/87) is therefore also closed.




Fig. 1




Fig. 2

Change-over relays

Change-over relays switch the load circuit over from one electrical load to another. These relays can be operated by a dashboard switch, for example. Change-over relays are used for switch applications with two stages/speeds such as heated rear windows or fan motors etc.


How change-over relays work

A change-over relay operates on the same principle as a make relay. The only difference is that the armature is connected to a second (alternative) output (87a) when released. As soon as the control circuit is active, the armature is pulled in, opens the break contact (87a) and switches over to the make contact (87). A change-over relay can be used as either a make or a break relay. By design, the switching current of the make contact is always higher than that of the break contact.



Rated Voltage


- 12 V: for passenger cars, agricultural and construction machinery etc.
- 24 V: for commercial vehicles, buses, municipal vehicles etc.



Rated load (depending on load type)

→ Resistive load:


The current remains around the same from switch-on to switch-off (e.g. rear window heater).

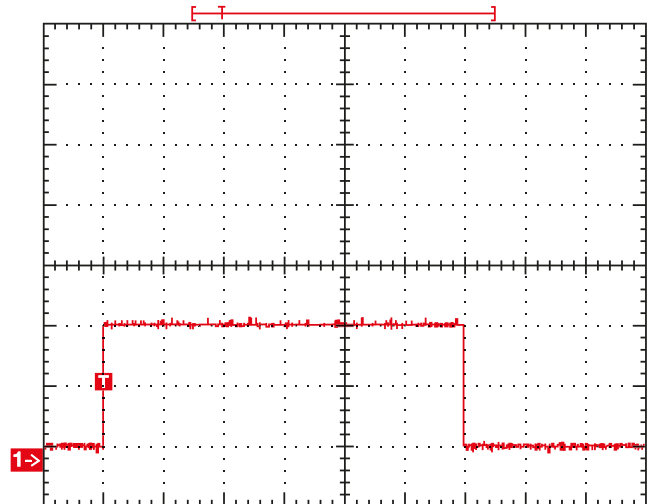

Example load curve, resistive load

→ Inductive load:


The inrush current increases to the rated current with a specific delay time due to the build-up of the inductor's magnetic field and then levels off (e.g. switching on a solenoid switch). During switch-off, a voltage of up to several thousand volts is (theoretically) induced, resulting in an electric arc between the relay contacts just opened.

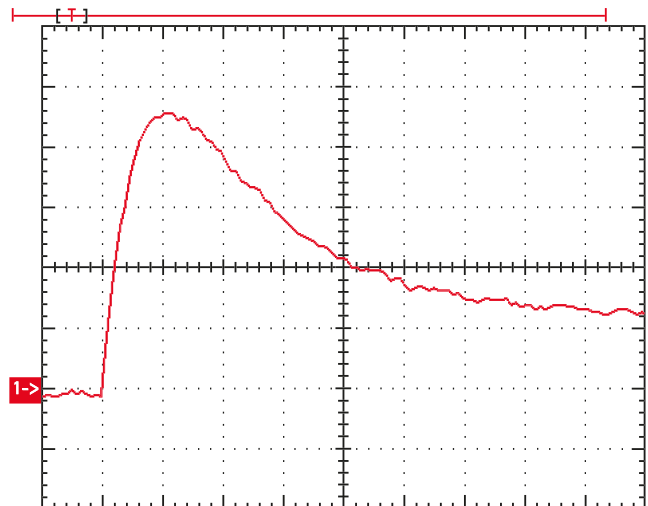

Example load curve, inductive load

→ Capacitive/bulb load:

The inrush current of a capacitive load or a lamp can rise to ten times the rated current before leveling off to the rated current.

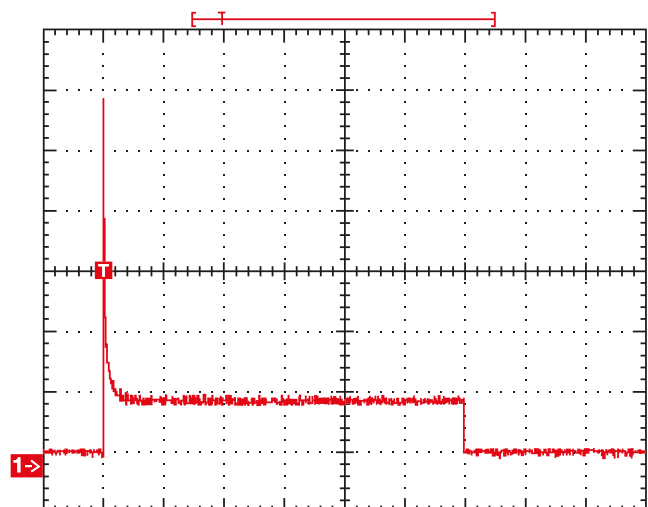


Example load curve, capacitive/bulb load



Coil circuit

In order to prevent voltage spikes caused by mutual inductance when switching off the coil current, our relays are in part equipped with resistors or diodes parallel to the coil.



Contacts and connector configurations

30	Load current +, terminal 15 (input)
85	Relay coil - (input)
86	Relay coil + (input)
87	Load current, make contact (output)
87a	Load current, break contact (output)

**Mini relays**

Mini relays according to ISO 7588-1, blade terminals according to ISO 8092-1.

Contact arrangements: make contact, change-over contact, max. 40 A switching power (make contact), rated voltage: 12 V, 24 V

Areas of application include: headlights, starters, fuel pumps, fan motors, horns and fanfares.

**Micro relay**

Micro relays according to ISO 7588-3 (1988), blade terminals according to ISO 8092-1.

Contact arrangements: make contact, change-over contact, max. 20 A switching power (make contact), rated voltage: 12 V, 24 V

Areas of application include: fuel pumps, air conditioning systems, windshield washer systems, wiper motors.

**High-power relay**

Mini relay version with larger dimensions, blade terminals according to ISO 8092-1.

Contact arrangement: make contact, change-over contact, max. 60 A switching power, rated voltage: 12 V, 24 V

Areas of application include: battery disconnect relays, starter motors, glow plugs, ignitions, windshield heating.

**Solid state relay**

Mini semiconductor relays according to ISO 7588-1, blade terminals according to ISO 8092-1.

Contact arrangement: make contact, max. 22 A switching power (make contact), rated voltage: 12 V



Areas of application include: vacuum pumps for brake booster support, daytime running lights.

**Battery disconnect relay**

Bi-stable electromechanical relay with one or two coils.



Contact arrangement: make contact, max. 180 A switching power, rated voltage: 12 V

Areas of application include: disconnecting the vehicle electric system from the battery in the event of accidents or for maintenance, retain battery charge by switching off quiescent current





Rated switching current*	Number of switching operations
max. 15 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 4-pole, with fuse link 15 A	1	4RA 003 530-001
12 V, 4-pole, with fuse link 15 A	112	4RA 003 530-007





Rated switching current*	Number of switching operations
max. 25 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 4-pole, with fuse link 25 A	112	4RA 003 530-041
12 V, 4-pole, with fuse link 25 A	1	4RA 003 530-042





Rated switching current*	Number of switching operations
min. 30 A, max. 40 A	max. 100,000
Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 4-pole	1	4RA 007 791-021



Rated switching current*	Number of switching operations
min. 44 A, max. 50 A	min. 75,000, max. 100,000
Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: Yes	


Description	PU	Part number
12 V, 4-pole, with 9.5 mm load connections	1	4RA 007 793-041
12 V, 4-pole, with 9.5 mm load connections	175	4RA 007 793-047



Rated switching current*	Number of switching operations
min. 15 A, max. 30 A	max. 100,000
Coil resistance: 90 ohm, Bracket: Yes	


Description	PU	Part number
12 V, 4-pole	1	4RA 965 400-001

* At 80°C ambient temperature

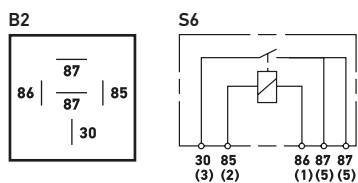


Rated switching current*	Number of switching operations
min. 30 A, max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole, with dual-output	1	4RA 933 791-061
12 V, 5-pole, with dual-output	40	4RA 933 791-067

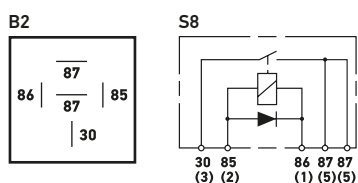


Rated switching current*	Number of switching operations
min. 30 A, max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole, with dual output and parallel diode	1	4RA 933 791-091

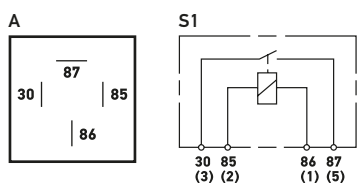


Rated switching current*	Number of switching operations
max. 30 A	max. 100,000
Coil resistance: 89 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 4-pole	1	4RA 965 400-071
12 V, 4-pole	40	4RA 965 400-077

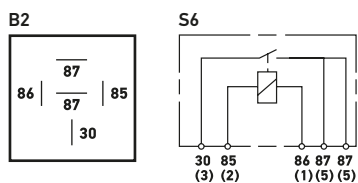

Rated switching current*	Number of switching operations
max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	


Description	PU	Part number
12 V, 5-pole	1	4RA 933 791-121
12 V, 5-pole	40	4RA 933 791-127

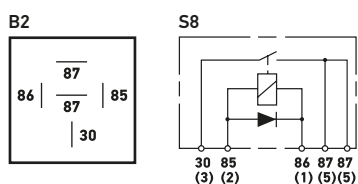

Rated switching current*	Number of switching operations
max. 40 A	max. 100,000
Coil resistance: 85 ohm, Parallel resistance: 680 ohm, Bracket: Yes	


Description	PU	Part number
12 V, 5-pole, with parallel diode	1	4RA 933 791-151

* At 80°C ambient temperature




Rated switching current*	Number of switching operations
min. 4 A, max. 30 A	max. 4,000,000
Coil resistance: 85 ohm, Bracket: No	

Description	PU	Part number
12 V, 4-pole	100	4RA 007 507-061

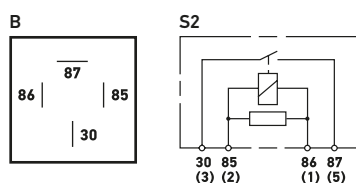


Rated switching current*	Number of switching operations
min. 30 A, max. 40 A	max. 100,000
Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No	

Description	PU	Part number
12 V, 4-pole	1	4RA 007 791-011
12 V, 4-pole	200	4RA 007 791-017

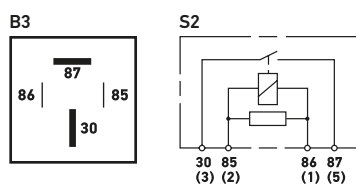


Rated switching current*	Number of switching operations
min. 44 A, max. 50 A	min. 75,000, max. 100,000
Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No	

Description	PU	Part number
12 V, 4-pole, with 9.5 mm load connections	1	4RA 007 793-031
12 V, 4-pole, with 9.5 mm load connections	175	4RA 007 793-037

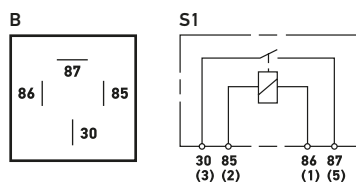


Rated switching current*	Number of switching operations
min. 30 A, max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: No	

Description	PU	Part number
12 V, 4-pole	1	4RA 933 332-101
12 V, 4-pole	40	4RA 933 332-107

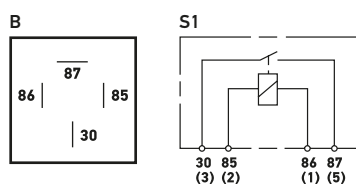


Rated switching current*	Number of switching operations
max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: No	


Description	PU	Part number
12 V, 4-pole	1	4RA 933 332-451
12 V, 4-pole	40	4RA 933 332-457

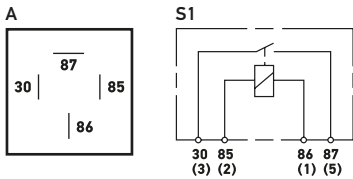


Rated switching current*	Number of switching operations	
min. 16 A, max. 30 A	max. 100,000	
Coil resistance: 90 ohm, Bracket: No		
Description	PU	Part number
12 V, 4-pole	100	4RA 965 400-017

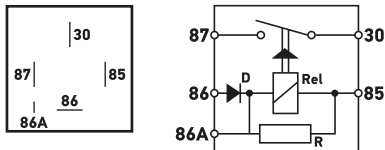

Rated switching current*		
max. 7.5 A		
Coil resistance: 85 ohm, Bracket: No		
Description	PU	Part number
12 V, 5-pole	1	4RA 007 507-071


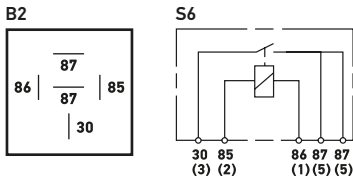


Rated switching current*	Number of switching operations	
min. 30 A, max. 40 A	max. 100,000	
Coil resistance: 85 ohm, Bracket: No		
Description	PU	Part number
12 V, 5-pole, with dual-output	1	4RA 933 332-151
12 V, 5-pole, with dual-output	100	4RA 933 332-157

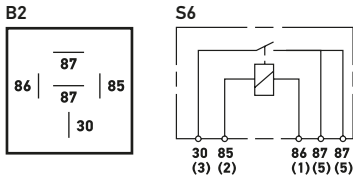



Rated switching current*	Number of switching operations	
max. 40 A	max. 100,000	
Coil resistance: 85 ohm, Bracket: No		
Description	PU	Part number
12 V, 5-pole	1	4RA 933 791-161
12 V, 5-pole	40	4RA 933 791-167

* At 80°C ambient temperature





Rated switching current*	Number of switching operations
max. 15 A	max. 100,000
Coil resistance: 315 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 4-pole, with fuse link 15 A	1	4RA 003 530-051





Rated switching current*	Number of switching operations
min. 16 A, max. 20 A	min. 100,000, max. 150,000
Coil resistance: 305 ohm, Parallel resistance: 1,200 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 4-pole	1	4RA 007 957-011
24 V, 4-pole	200	4RA 007 957-017





Rated switching current*	Number of switching operations
min. 16 A, max. 30 A	min. 100,000, max. 250,000
Coil resistance: 360 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 4-pole	1	4RA 965 400-031





Rated switching current*	Number of switching operations
max. 30 A	max. 100,000
Coil resistance: 320 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 4-pole	1	4RA 965 400-101




Rated switching current*	Number of switching operations
min. 16 A, max. 20 A	min. 100,000, max. 250,000
Coil resistance: 350 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole, with dual-output	1	4RA 933 791-071




Rated switching current*	Number of switching operations
max. 20 A	max. 100,000
Coil resistance: 340 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole	1	4RA 933 791-131

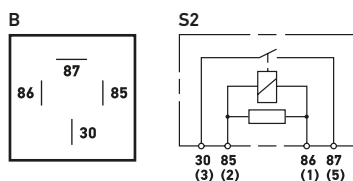


Rated switching current*	Number of switching operations
min. 16 A, max. 20 A	min. 100,000, max. 150,000
Coil resistance: 305 ohm, Parallel resistance: 1,200 ohm, Bracket: No	

Description	PU	Part number
24 V, 4-pole	1	4RA 007 957-001
24 V, 4-pole	200	4RA 007 957-007




Rated switching current*	Number of switching operations
max. 15 A	
Coil resistance: 68 ohm, Bracket: No	

Description	PU	Part number
24 V, 4-pole	1	4RA 007 507-081

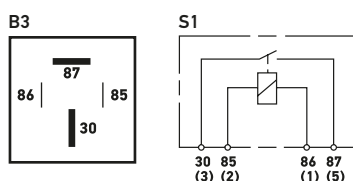


Rated switching current*	Number of switching operations
min. 30 A, max. 40 A	max. 100,000
Coil resistance: 360 ohm, Bracket: No	

Description	PU	Part number
24 V, 4-pole	1	4RA 933 321-021
24 V, 4-pole	40	4RA 933 321-027

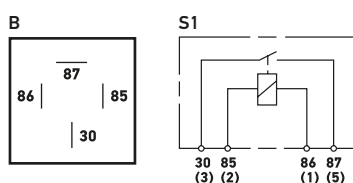

Rated switching current*	Number of switching operations
min. 16 A, max. 20 A	min. 100,000, max. 250,000
Coil resistance: 350 ohm, Bracket: No	



Description	PU	Part number
24 V, 4-pole	1	4RA 933 332-111
24 V, 4-pole	40	4RA 933 332-117

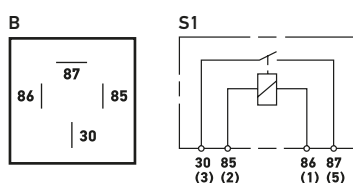

Rated switching current*	Number of switching operations
max. 20 A	max. 100,000
Coil resistance: 340 ohm, Bracket: No	



Description	PU	Part number
24 V, 4-pole	1	4RA 933 332-461

* At 80°C ambient temperature




Rated switching current*	Number of switching operations
min. 16 A, max. 20 A	min. 100,000, max. 250,000
Coil resistance: 350 ohm, Bracket: No	

Description	PU	Part number
24 V, 5-pole	1	4RA 933 791-081




Rated switching current*	Number of switching operations
max. 20 A	max. 100,000
Coil resistance: 340 ohm, Bracket: No	

Description	PU	Part number
24 V, 5-pole	1	4RA 933 791-141

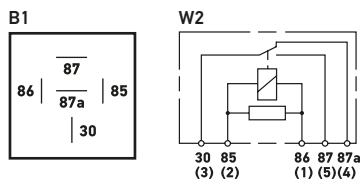


Rated switching current*	Number of switching operations
min. 5 A, max. 30 A	min. 100,000, max. 300,000
Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 007 794-031
12 V, 5-pole	200	4RD 007 794-037

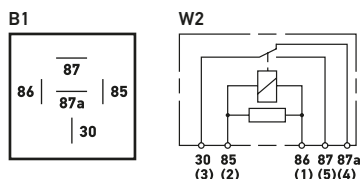


Rated switching current*	Number of switching operations
min. 5 A, max. 40 A	max. 100,000
Coil resistance: 85 ohm, Parallel resistance: 680 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	200	4RD 007 794-067

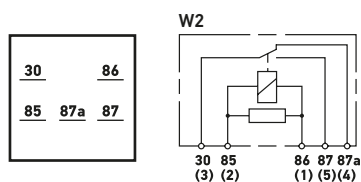


Rated switching current*	Number of switching operations
min. 10 A, max. 40 A	max. 100,000
Coil resistance: 90 ohm, Parallel resistance: 680 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 931 410-081

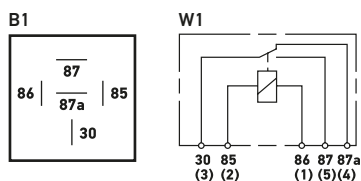

Rated switching current*	Number of switching operations
min. 5 A, max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-011
12 V, 5-pole	100	4RD 933 332-017


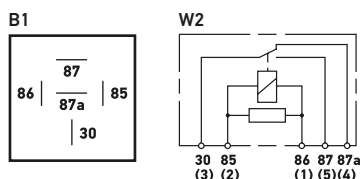


Rated switching current*	Number of switching operations
min. 6 A, max. 30 A	min. 60,000, max. 100,000
Coil resistance: 85 ohm, Parallel resistance: 680 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole, dust and waterproof, IP 6K7 / IP 6K9K**	1	4RD 933 332-031
12 V, 5-pole, dust and waterproof, IP 6K7 / IP 6K9K**	160	4RD 933 332-037



* At 80°C ambient temperature

** In conjunction with mating connector 8JD 745 801-001/-011




Rated switching current*	Number of switching operations
min. 6 A, max. 30 A	min. 60,000, max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-041
12 V, 5-pole	40	4RD 933 332-047





Rated switching current*	Number of switching operations
min. 6 A, max. 30 A	min. 60,000, max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-237





Rated switching current*	Number of switching operations
min. 6 A, max. 30 A	min. 60,000, max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole, with parallel diode	40	4RD 933 332-277





Rated switching current*	Number of switching operations
min. 6 A, max. 40 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-361





Rated switching current*	Number of switching operations
min. 6 A, max. 20 A	max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-391
12 V, 5-pole	40	4RD 933 332-397



Rated switching current*	Number of switching operations
min. 6 A, max. 30 A	max. 100,000
Coil resistance: 85 ohm, Parallel resistance: 680 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 5-pole, with parallel diode	40	4RD 933 332-627

**Rated switching current***



min. 5 A, max. 30 A

Number of switching operations

min. 100,000, max. 300,000

Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole	1	4RD 007 794-021
12 V, 5-pole	200	4RD 007 794-027
12 V, 5-pole	200	4RD 007 794-077

**Rated switching current***



min. 5 A, max. 30 A

Number of switching operations

max. 100,000

Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole	200	4RD 007 794-025

**Rated switching current***



min. 5 A, max. 30 A

Number of switching operations

min. 100,000, max. 300,000

Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole, with parallel diode	1	4RD 007 794-041
12 V, 5-pole, with parallel diode	200	4RD 007 794-047

**Rated switching current***



min. 5 A, max. 30 A

Number of switching operations

max. 100,000

Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole	168	4RD 007 794-078

**Rated switching current***

min. 15 A, max. 30 A

Number of switching operations

max. 100,000


Coil resistance: 90 ohm, Parallel resistance: 470 ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole	360	4RD 931 680-017


* At 80°C ambient temperature



C1



W2


Rated switching current*

min. 5 A, max. 20 A

Number of switching operations


max. 150,000

Coil resistance: 100 ohm, Parallel resistance: 680 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole	500	4RD 933 319-047



B1



W3


Rated switching current*

min. 6 A, max. 30 A

Number of switching operations


min. 60,000, max. 100,000

Coil resistance: 85 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole, with parallel diode	1	4RD 933 332-021
12 V, 5-pole, with parallel diode	40	4RD 933 332-027



B1



W1


Rated switching current*

min. 6 A, max. 30 A

Number of switching operations


min. 60,000, max. 100,000

Coil resistance: 85 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-051
12 V, 5-pole	40	4RD 933 332-057



B1



W3


Rated switching current*

min. 20 A, max. 30 A

Number of switching operations


max. 100,000

Coil resistance: 85 ohm, Parallel resistance: 680 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole, with parallel diode	1	4RD 933 332-371
12 V, 5-pole, with parallel diode	40	4RD 933 332-377



B1



W1


Rated switching current*


min. 20 A, max. 40 A

Number of switching operations

max. 100,000



Coil resistance: 85 Ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole	1	4RD 933 332-401
12 V, 5-pole	40	4RD 933 332-407

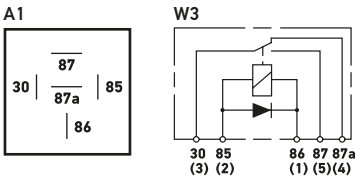



Rated switching current*	Number of switching operations	
min. 8 A, max. 33 A	min. 100,000, max. 150,000	
Coil resistance: 95 ohm, Parallel resistance: 680 ohm, Bracket: No		
Description	PU	Part number
12 V, 5-pole, with parallel diode	40	4RD 965 400-027

* At 80°C ambient temperature





Rated switching current*	Number of switching operations
min. 5 A, max. 20 A	min. 100,000, max. 150,000
Coil resistance: 305 ohm, Parallel resistance: 1,200 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole	1	4RD 007 903-011





Rated switching current*	Number of switching operations
min. 5 A, max. 20 A	min. 100,000, max. 135,000
Coil resistance: 350 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-061
24 V, 5-pole	40	4RD 933 332-067





Rated switching current*	Number of switching operations
min. 5 A, max. 20 A	min. 100,000, max. 135,000
Coil resistance: 350 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole, with parallel diode	1	4RD 933 332-081
24 V, 5-pole, with parallel diode	40	4RD 933 332-087





Rated switching current*	Number of switching operations
min. 5 A, max. 20 A	max. 100,000
Coil resistance: 350 ohm, Parallel resistance: 1,200 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-201



Rated switching current*	Number of switching operations
min. 5 A, max. 20 A	max. 100,000
Coil resistance: 340 ohm, Bracket: Yes	

Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-411
24 V, 5-pole	40	4RD 933 332-417

**Rated switching current***



min. 5 A, max. 20 A

Number of switching operations

min. 100,000, max. 150,000

Coil resistance: 305 ohm, Parallel resistance: 1,200 ohm, Bracket: No

Description	PU	Part number
24 V, 5-pole	1	4RD 007 903-001
24 V, 5-pole	200	4RD 007 903-007

**Rated switching current***



min. 5 A, max. 20 A

Number of switching operations

min. 100,000, max. 150,000

Coil resistance: 305 ohm, Bracket: No

Description	PU	Part number
24 V, 5-pole, with parallel diode	1	4RD 007 903-021
24 V, 5-pole, with parallel diode	200	4RD 007 903-027

**Rated switching current***



min. 5 A, max. 20 A

Number of switching operations

min. 100,000, max. 135,000

Coil resistance: 350 ohm, Bracket: No

Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-071
24 V, 5-pole	40	4RD 933 332-077

**Rated switching current***



min. 5 A, max. 20 A

Number of switching operations

min. 100,000, max. 135,000

Coil resistance: 350 ohm, Bracket: No

Description	PU	Part number
24 V, 5-pole, with parallel diode	1	4RD 933 332-091
24 V, 5-pole, with parallel diode	40	4RD 933 332-097

**Rated switching current***

min. 5 A, max. 20 A

Number of switching operations

min. 100,000, max. 135,000


Coil resistance: 350 ohm, Parallel resistance: 1,200 ohm, Bracket: No

Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-261


* At 80°C ambient temperature



B1



W1


Rated switching current*

min. 5 A, max. 20 A

Number of switching operations


max. 100,000

Coil resistance: 340 ohm, Bracket: No


Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-421
24 V, 5-pole	40	4RD 933 332-427



B1



W3


Rated switching current*

min. 5 A, max. 20 A

Number of switching operations


max. 100,000

Coil resistance: 340 ohm, Bracket: No


Description	PU	Part number
24 V, 5-pole, with parallel diode	1	4RD 933 332-441
24 V, 5-pole, with parallel diode	40	4RD 933 332-447



B1



W2


Rated switching current*


min. 5 A, max. 20 A

Number of switching operations

max. 100,000

Coil resistance: 302 ohm, Parallel resistance: 2,700 ohm, Bracket: No


Description	PU	Part number
24 V, 5-pole	1	4RD 933 332-611

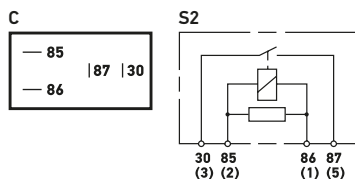

Rated switching current*	Number of switching operations
max. 20 A	max. 150,000

Coil resistance: 103.5 to 126.5 ohm, Parallel resistance: 680 ohm, Bracket: No


Description	PU	Part number
12 V, 4-pole	1	4RA 933 766-111
12 V, 4-pole	50	4RA 933 766-117

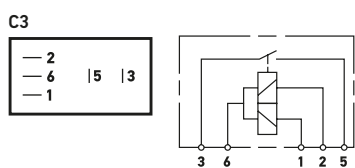

Rated switching current*	Number of switching operations
max. 20 A	max. 100,000

Coil resistance: 2 x 75 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole, Bi-stable	1	4RC 933 364-027

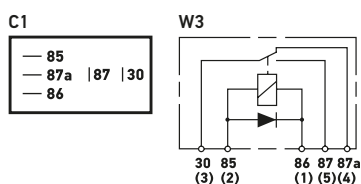

Rated switching current*	Number of switching operations
min. 10 A, max. 20 A	max. 150,000

Coil resistance: 87 to 97 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole	350	4RD 007 814-075

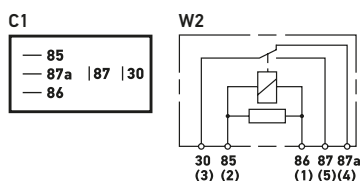

Rated switching current*	Number of switching operations
min. 10 A, max. 35 A	max. 100,000

Coil resistance: 140 ohm, Parallel resistance: 1,000 ohm, Bracket: No

Description	PU	Part number
12 V, 5-pole, with locating lugs	450	4RD 933 319-007

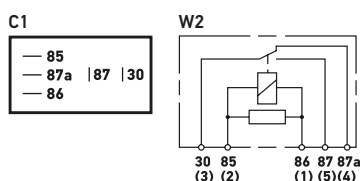


Rated switching current*	Number of switching operations
min. 10 A, max. 20 A	max. 100,000

Coil resistance: 103.5 to 126.5 ohm, Parallel resistance: 680 ohm, Bracket: No


Description	PU	Part number
12 V, 5-pole	350	4RD 965 453-047

* At 80°C ambient temperature

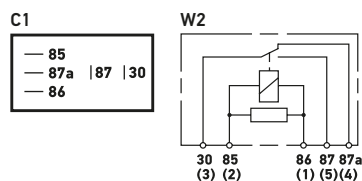



Rated switching current*	Number of switching operations
min. 5 A, max. 20 A	min. 50,000, max. 100,000
Coil resistance: 360 ohm, Parallel resistance: 384 ohm, Bracket: No	

Description	PU	Part number
24 V, 5-pole	1	4RD 933 319-011
24 V, 5-pole	50	4RD 933 319-017

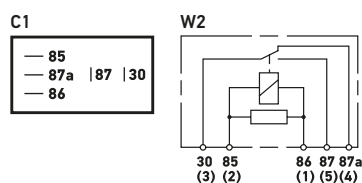



Rated switching current*	Number of switching operations
min. 10 A, max. 20 A	max. 100,000
Coil resistance: 103.5 to 126.5 ohm, Parallel resistance: 680 ohm, Bracket: No	

Description	PU	Part number
12 V, 5-pole	1	4RD 965 453-041
12 V, 5-pole	256	4RD 965 453-048



Rated switching current*	Number of switching operations
min. 25 A, max. 60 A	min. 50,000, max. 100,000
Coil resistance: 85 ohm, Bracket: Yes	

Description	PU	Part number
12 V, 4-pole	1	4RA 003 437-081
12 V, 4-pole	120	4RA 003 437-087
12 V, 4-pole, with parallel and polarity reversal protection diode	1	4RA 003 437-101




Rated switching current*	Number of switching operations
min. 25 A, max. 60 A	min. 50,000, max. 100,000
Coil resistance: 85 ohm, Bracket: No	

Description	PU	Part number
12 V, 4-pole	1	4RA 003 437-111


* At 80°C ambient temperature



B3



S1


Rated switching current*

min. 25 A, max. 60 A

Number of switching operations


min. 50,000, max. 100,000

Coil resistance: 310 ohm, Bracket: Yes


Description	PU	Part number
24 V, 4-pole	1	4RA 003 437-091
24 V, 4-pole	120	4RA 003 437-097



B3



S1


Rated switching current*


min. 25 A, max. 60 A



Number of switching operations

min. 50,000, max. 100,000



Coil resistance: 310 ohm, Bracket: No

Description	PU	Part number
24 V, 4-pole	1	4RA 003 437-121
24 V, 4-pole	180	4RA 003 437-127

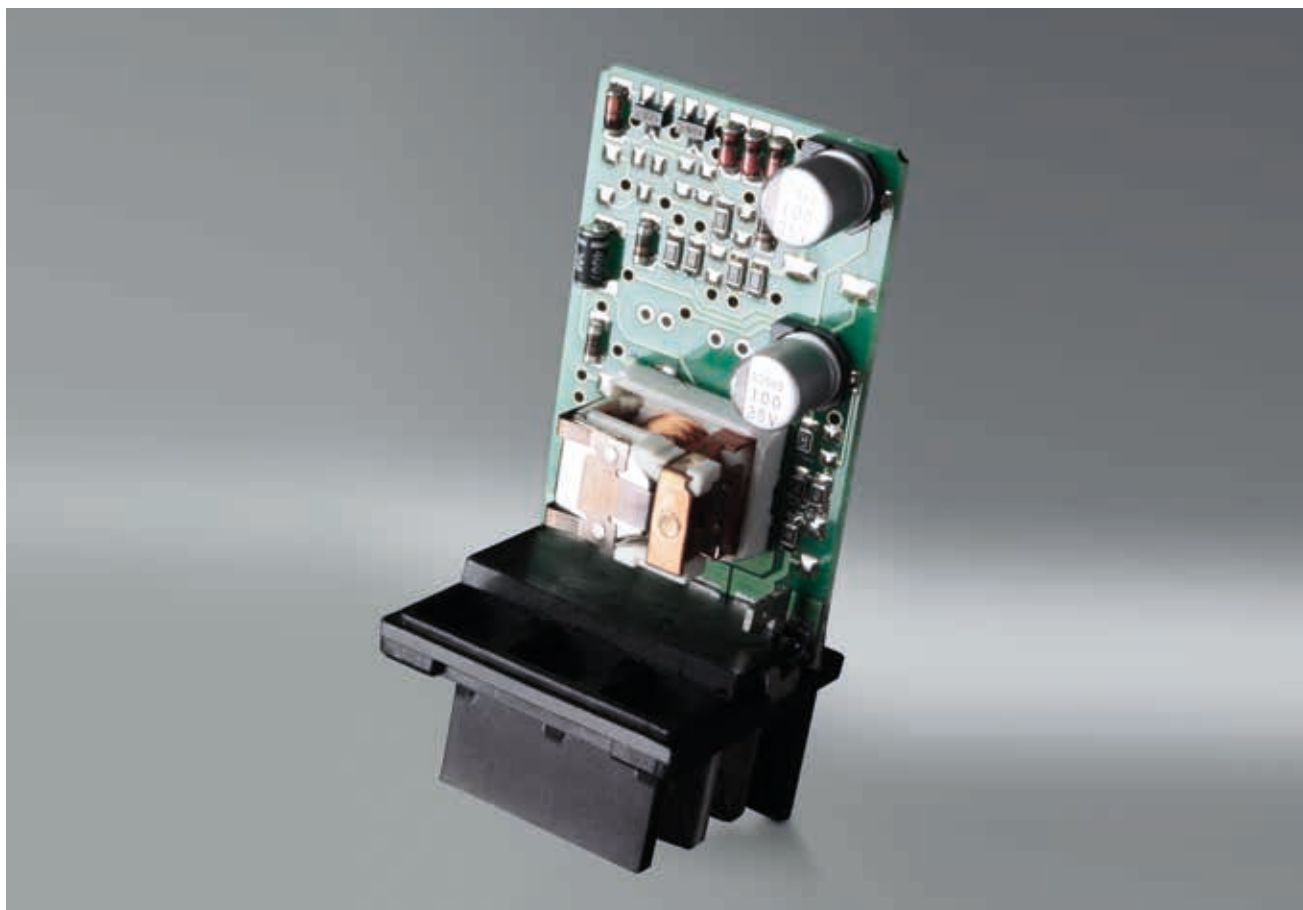



Rated switching current*	Number of switching operations	
max. 180 A	max. 15,000	
Coil resistance: 2 x 5 ohm, Bracket: No		
Description	PU	Part number
12 V, 6-pole, with parallel diode	1	4RC 011 152-007



Rated switching current*	Number of switching operations	
max. 22 A	max. 1,000,000	
Coil resistance: 1,400 ohm, Parallel resistance: R1 = 100 ohm; R2 = 2,000 ohm, Bracket: No		
Description	PU	Part number
12 V, 4-pole	1	4RA 931 774-071

* At 80°C ambient temperature



Battery disconnect relay

- Disconnects the vehicle electric system from the battery, as a component of vehicle electric system control units and pre-fuse devices
- Battery charge is maintained by avoiding quiescent current: large vehicle electric system parts are switched off during longer periods of vehicle standstill
- Voltage to the vehicle electric system or its parts is interrupted for maintenance work
- Safety switch-off in the event of an accident or cable damage to avoid fire hazard

Advantages:

- **Mechanically bi-stable switching unit:**
Impulse at the closing coil closes the contacts, these are stopped mechanically, impulse at the opening coil opens the contacts
- Contact bridge double breaking
- All load circuit components with large cross-section (>30 mm²) for high continuous current carrying capacity
- **Coil terminal:**
2-pole or 4-pole AMP connector



Solid state relay

- Semi-conductor relays, designed for resistive, lamp and inductive loads
- Pulse width modulation (PWM) makes controlled power regulation of loads (up to 1 kHz) possible
- Maximum switching safety, particularly suitable for all safety-related switching functions
- In terms of design size and plug matrix, compatible with conventional ISO mini relays (standardised dimensions according to ISO 7588-1)
- Silent switching e.g. in the passenger compartment
- Resistant to short-circuit and excess load
- Resistant to reverse polarity
- Impact and vibration-resistant
- Sealed and waterproof
- Overheating protection
- Low quiescent current

The solid state relay is a modern semi-conductor switch and makes switching possible without moving parts. It can be connected via standardised pin bases.

With this development, HELLA is doing justice to the increasing trend of controlling loads (e.g. fan motors, glow plugs, headlights and heaters) using power regulation. The increased switching frequency makes continual setting by means of pulse width modulation (PWM) possible e.g. for daytime running lights.

The silent semi-conductor relay is particularly attractive for use inside vehicles. In addition, the wear and bounce-free switching means it can be used for applications with a high number of switching processes e.g. ABS or air-conditioning compressor clutch or vacuum pump for brake booster support in hybrid vehicles made by leading OEMs.

Mini relays 12 V		Mini relays 24 V		Power mini relay	
4RA 007 791-...	4RA 933 332-...	4RA 007 957-...	4RA 933 332-...	4RA 007 793-...	4RA 933 321-...
4RD 007 794-...	4RA 933 791-...	4RD 007 903-...	4RA 933 791-...		
	4RA 965 400-...	4RA 003 530-...	4RA 965 400-...		
	4RA 003 530-...				

General specifications						
Test voltage	13,5 V	13,5 V	27 V	27 V	13,5 V	27 V
Test temperature	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C
Permissible ambient temperature	-40°C ... +125°C	-40°C ... +85°C	-40°C ... +125°C	-40°C ... +85°C	-40°C ... +125°C	-40°C ... +125°C
Storage temperature	-40°C ... +130°C	-40°C ... +125°C	-40°C ... +130°C	-40°C ... +125°C	-40°C ... +130°C	-40°C ... +125°C
Flat plug (according to ISO 8092)						
30	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	9,5 x 1,2 mm	9,5 x 1,2 mm
85	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm
86	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm
87	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	9,5 x 1,2 mm	9,5 x 1,2 mm
87a	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	–	–

Coil specifications						
Rated Voltage	12 V	12 V	24 V	24 V	12 V	24 V
Operating voltage range at permissible ambient temperature	8 V ... 16 V	8 V ... 16 V	16 V ... 30 V	16 V ... 30 V	8 V ... 16 V	16 V ... 30 V
Pick-up voltage at test temperature	< 8 V	< 8 V	< 17 V	< 15,6 V	< 8 V	< 14,4 V
Drop-out voltage at test temperature	< 1 V	< 1 V	> 3,5 V	> 3,5 V	> 1,3 V	< 2,4 V
Coil resistance at test temperature without parallel component	85 / 100 Ohm ± 10 %	85/90 Ohm ± 10 %	305 / 315 Ohm ± 10 %	350 / 360 Ohm ± 10 %	100 Ohm ± 10 %	100 Ohm ± 10 %
Response time	< 10 ms	< 10 ms	< 10 ms	< 10 ms	< 10 ms	< 10 ms
Drop-out time	< 10 ms	< 10 ms	< 10 ms	< 10 ms	< 10 ms	< 7 ms
Insulation resistance Coil circuit/load circuit	> 100 MOhm	> 100 MOhm	> 100 MOhm	> 100 MOhm	> 100 MOhm	> 100 MOhm
Breakdown strength Coil circuit/load circuit	> 1.000 VDC	> 1.000 VDC	> 1.000 VDC	> 1.000 VDC	> 1.000 VDC	> 500 VDC

Contact details						
Contact voltage drop-out at test voltage ...						
... Make contact in showroom condition	< 10 mV/A	< 10 mV/A	< 10 mV/A	< 10 mV/A	< 5 mV/A	< 5 mV/A
... in new state normally closed contact	< 10 mV/A	< 15 mV/A	< 10 mV/A	< 15 mV/A	–	–
... after service life test normally open contact	< 10 mV/A	< 15 mV/A	< 10 mV/A	< 15 mV/A	< 10 mV/A	< 25 mV/A
... after service life test normally closed contact	< 10 mV/A	< 20 mV/A	< 15 mV/A	< 20 mV/A	–	–
Residual current	1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V
Mechanical design life (Number of switching operations)	10 ⁷	10 ⁷	10 ⁷	10 ⁷	10 ⁷	10 ⁷

High-power relay		Micro relay			Solid state relay		Battery disconnect relay
12 V	24 V	12 V		24 V	12 V		12 V
4RA 003 437-...	4RA 003 437-...	4RD 007 814-... 4RD 933 319-...	4RC 933 364-...	4RD 933 319-...	4RA 931 774-...		4RC 011 152-...

13,5 V	27 V	13,5 V	13,5 V	27 V	13,5 V	13,5 V
+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C	+23°C ± 5°C
-40°C ... +85°C	-40°C ... +85°C	-40°C ... +125°C	-40°C ... +105°C	-40°C ... +125°C	-40°C ... +125°C	-30°C ... +85°C
-40°C ... +125°C	-40°C ... +125°C	-40°C ... +130°C	-40°C ... +125°C	-40°C ... +85°C	-40°C ... +150°C	-30°C ... +85°C

9,5 x 1,2 mm	9,5 x 1,2 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	2-pole/4-pole AMP, M8/M10 screw bolts
6,3 x 0,8 mm	6,3 x 0,8 mm	4,8 x 0,8 mm	4,8 x 0,8 mm	4,8 x 0,8 mm	6,3 x 0,8 mm	
6,3 x 0,8 mm	6,3 x 0,8 mm	4,8 x 0,8 mm	4,8 x 0,8 mm	4,8 x 0,8 mm	6,3 x 0,8 mm	
9,5 x 1,2 mm	9,5 x 1,2 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	6,3 x 0,8 mm	
–	–	4,8 x 0,8 mm	4,8 x 0,8 mm	4,8 x 0,8 mm	–	

12 V	24 V	12 V	12 V	24 V	12 V	12 V
8 V ... 16 V	16 V ... 30 V	8 V ... 16 V	8 V ... 16 V	16 V ... 30 V	8 V ... 16 V	8 V ... 16 V
< 7,5 V	< 17 V	< 8 V	< 6 V	< 14,4 V	< 9 V	< 6,5 V
< 1 V	> 5 V	< 1 V	–	< 2,4 V	< 12,5 V	> 3 V
85 Ohm ± 10%	310 Ohm ± 10%	92 / 140 Ohm ± 10%	2 x 75 Ohm ± 10%	360 Ohm ± 10%	–	1 x 2,34 / 2 x 4,3 ± 10%
< 10 ms	< 10 ms	< 10 ms	< 5 ms	< 10 ms	< 150 µs	< 20 ms
< 10 ms	< 10 ms	< 10 ms	< 5 ms	< 10 ms	< 75 µs	< 20 ms
> 100 MOhm	> 100 MOhm	> 100 MOhm	> 100 MOhm	> 100 MOhm	–	> 100 MOhm
> 1.000 VDC	> 1.000 VDC	> 500 VDC / VAC	> 800 VDC	> 500 VAC	–	> 500 VAC

< 3 mV/A	< 3 mV/A	< 10 mV/A	< 5 mV/A	< 10 mV/A	–	< 2,5 mV/A
–	–	< 10 mV/A	–	< 10 mV/A	–	–
< 10 mV/A	< 10 mV/A	< 25 mV/A	< 10 mV/A	< 25 mV/A	–	< 2,5 mV/A
–	–	< 25 mV/A	–	< 25 mV/A	–	–
1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V	1 A / 6 V
10 ⁷	10 ⁷	10 ⁷	10 ⁷	10 ⁷	–	2 x 10 ⁵

Vibration test

DIN EN 600 68-2-6; test: Fc (sinusoidal);
20–200 Hz, 5 g, 6 h per axis

Damp/heat test, constant

DIN EN 600 68-2-78, test: Cab;
Upper temperature: +55°C, 93% rel. hum., 56 d

Shock test

DIN EN 600 68-2-27; test: Ea (semi-sinusoidal);
max. 50 g, 11 ms, 1,000 shocks per direction

Temperature cycle test

DIN EN ISO 600 68-2-14, test: Nb;
-40°C / +85°C (5°C per minute), 10 cycles

Corrosion test

DIN EN 600 68-2-42; test: Kc;
10 ± 2 cm³/m³ SO₂, +25°C, 75 % rel. hum., 10 d

Condensation-water test


DIN EN ISO 6988;
+40°C, 0.2 dm³ SO₂, 6 cycles (24 h cycle),
Storage: 8 h per cycle

Damp/heat test, cyclic


DIN EN 600 68-2-30, test: Db, variant 1;
Upper temperature: +55°C, min. 90% rel. hum., 6 cycles

Protection class

IP54 according to ISO 20653

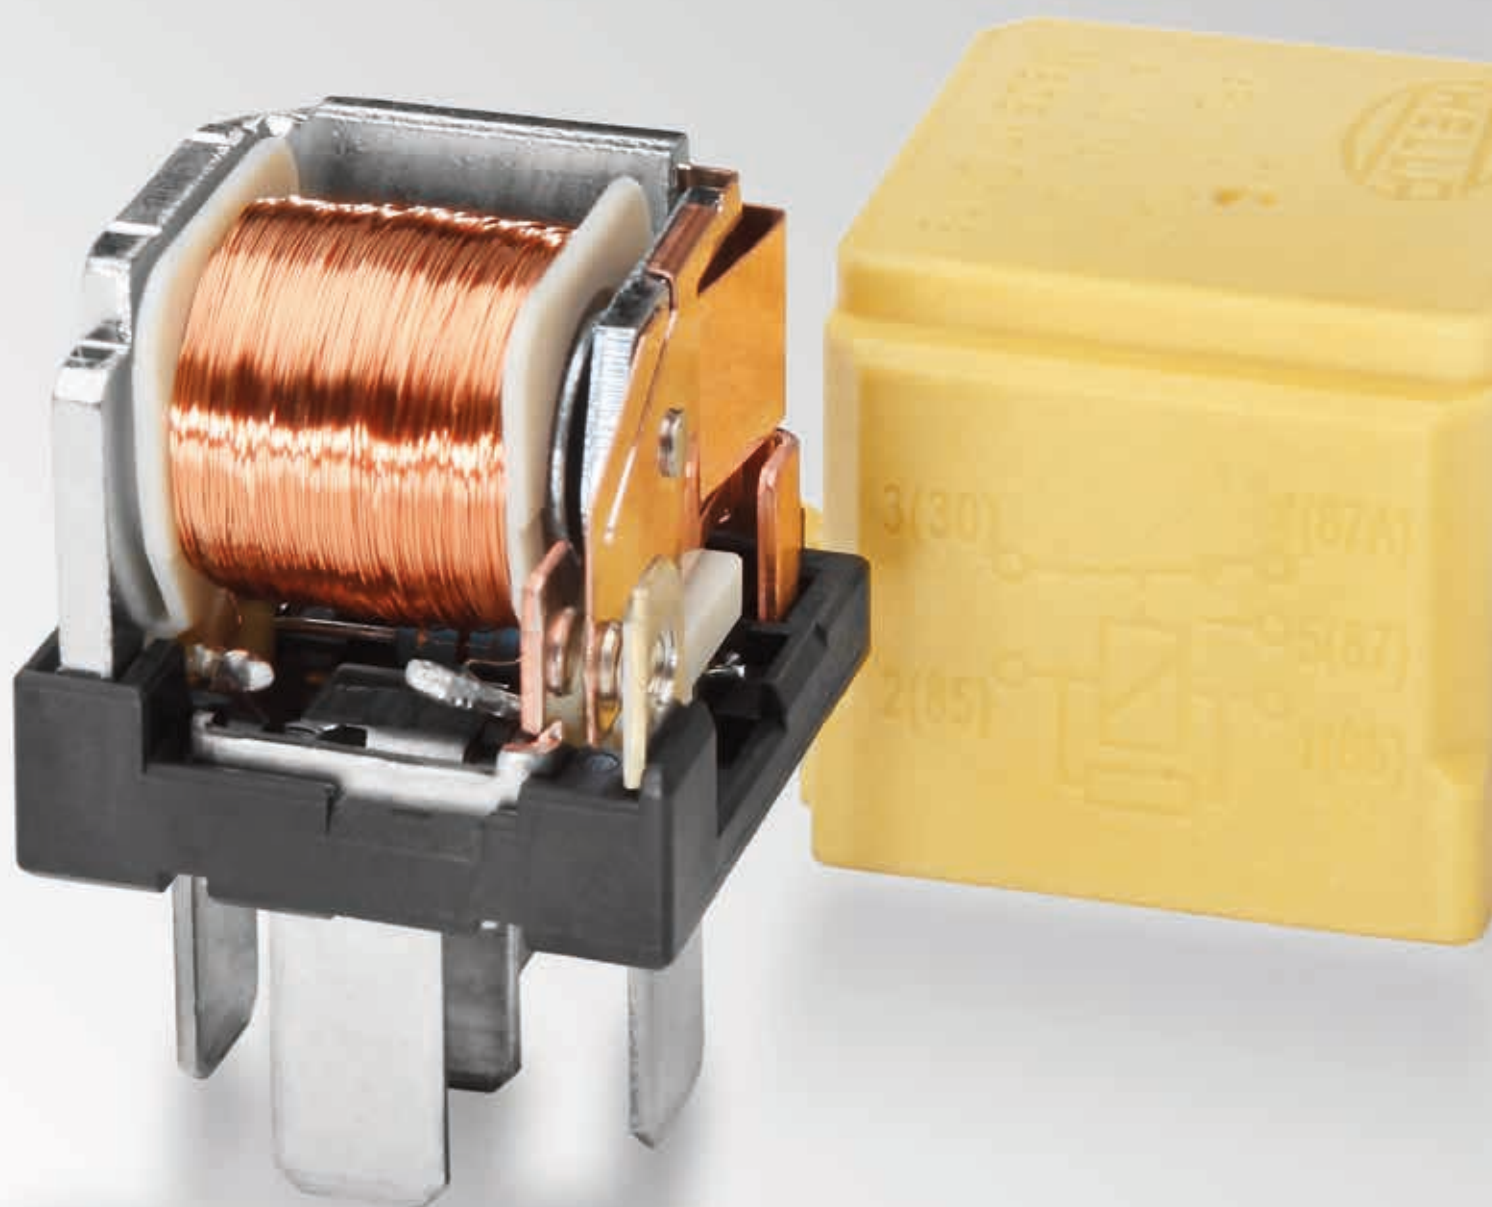


Key components of a flasher unit

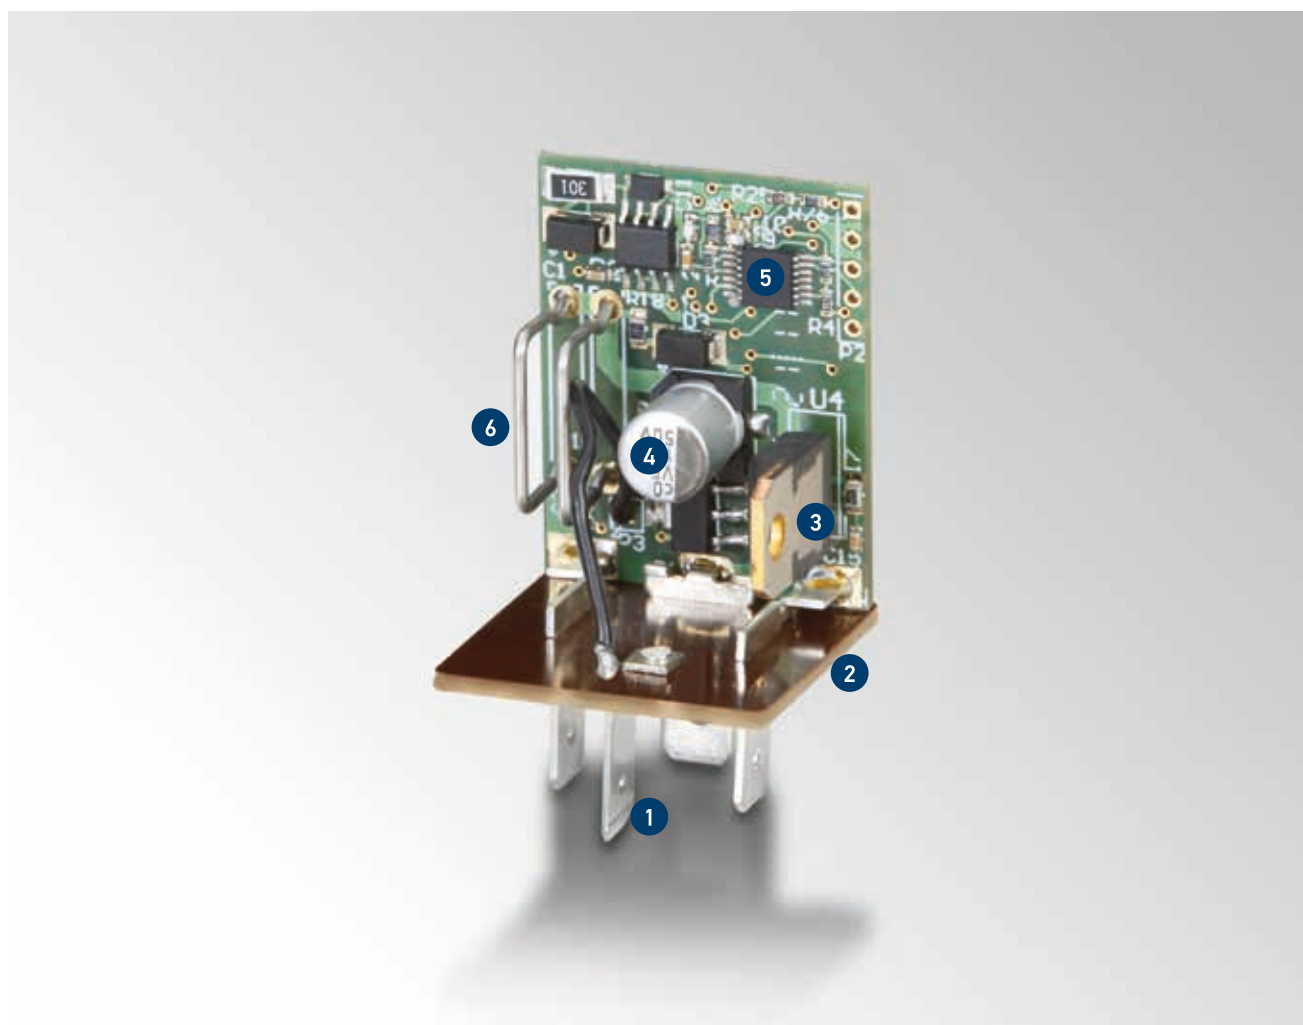

Legend

- 1 Blade terminal made of E-Cu with tin-plated surface
- 2 Base plate
- 3 Power transistor
- 4 Capacitor
- 5 IC module
- 6 Measuring resistor for flasher current



Functional principle

- In terms of circuitry, every flasher unit is an "astable multivibrator". Its role is to operate blinker lights at the statutory frequency of 1.5 +/- 0.5 Hz or 90 +/- 30 rpm. This value applies to both directional and hazard warning lights.
- Each flasher unit is assigned a separate output load or a permissible number of flashing indicator lights. This specific load case variant may not be exceeded or undercut, as otherwise the failure control will fail to work correctly. Some typical load cases which are supported are shown below:

Scenario	Direction flashing	Hazard warning flashing	Pictogram
Towcar only	2 x 21 W	4 x 21 W	
	2 x 21 W + 0 ... 5 W	4 x 21 W + 2 x 5 W	
Towcar + 1 trailer	2 + 1 x 21 W	6 x 21 W	
	2 + 1 x 21 W + 0 ... 5 W	6 x 21 W + 2 x 5 W	
	3 + 1 x 21 W	8 x 21 W	
	3 + 1 x 27 W (32 CP) + 3 W (SAE)	8 x 27 W (32 CP) + 2 x 3 W (SAE)	—
	4 + 1 x 21 W	10 x 21 W	
Towcar + 2 trailers	2 + 1 + 1 x 21 W	8 x 21 W	


In addition to the load cases above, there are other use cases which do not feature failure control. These variants can be found in the product overview from page 44 on.

- The failure of an indicator light must be clearly displayed to the driver. The law permits failure control by doubling the flashing frequency (E-control) or the indicator control lamp remaining off (P-control). The failure control applies to motor vehicles and all trailers.
- Segmentation into different current and control circuits is typical of flashing circuits. We distinguish between:
 - Single-circuit flasher units
 - Dual-circuit flasher units
 - Three-circuit flasher units
 - Pulse generators
- In addition to the flasher circuits listed above, HELLA also supplies pulse generators. In principle, these are flasher units without failure control. In contrast to the above types, pulse generators can be operated with small loads (e.g. 10 W).




Rated Voltage

- 6 V: for motorbikes etc.
- 12 V: for passenger cars, agricultural and construction machinery etc.
- 24 V: for commercial vehicles, buses, municipal vehicles etc.



Rated load, rated switching current
(depending on load case)

- The number of connected flashing indicator lamps must not exceed the use cases/rated loads indicated for the respective flasher units
- Special-purpose variants available for LED lights



Contacts and connector configurations

Single-circuit flasher unit

C	Towcar failure control lamp
C2	1st trailer failure control lamp
C3	2nd trailer failure control lamp
31	Ground
49	Input
49a	Output

Dual-circuit flasher unit

L	Indicator, left (input)
R	Indicator, right (input)
LL	Towcar indicator, left
RL	Towcar indicator, right
C	Towcar failure control lamp
C2	1st trailer failure control lamp
31	Ground
49	Input
49a	Output
54L	Trailer indicator, left
54R	Trailer indicator, right

Three-circuit flasher unit

L	Indicator, left (input)
R	Indicator, right (input)
LLH	Towcar indicator, left rear
LLV	Towcar indicator, left front
RLH	Towcar indicator, right rear
RLV	Towcar indicator, right front
C	Towcar failure control lamp
C2	1st trailer failure control lamp
C3	2nd trailer failure control lamp
31	Ground
49	Input
49a	Output
54L	Trailer indicator, left
54R	Trailer indicator, right



03 4641



LED- Blinkgeber

LED- Flasher- Unit

4DN 009 492-10

12V 2+1+1

Made by HELLA

|C .../...

49 |

C2


|31

49A



The single-circuit test circuit


Single-circuit units are used in load cases (per 21 W bulb) 2x, 4x, 5x, 2+1, 3+1, 2+1+1 for passenger cars, light commercial vehicles and tow vehicles. It is not possible to distinguish between the failure of a lamp on the towcar or on the trailer, as there is only one measuring resistor for the load current.

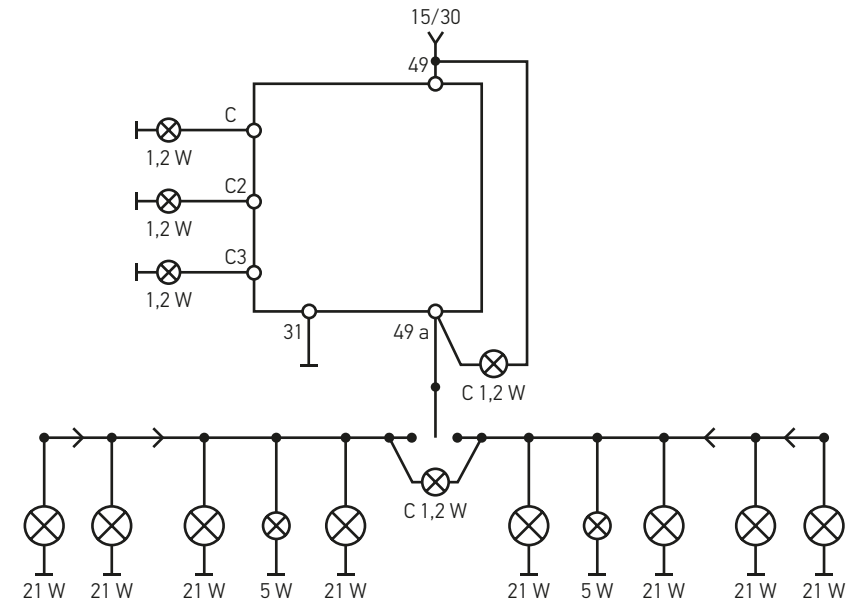

Load case variant	Control types:		
	Towcar	1st trailer	2nd trailer
2 (4) x 21 W + 5 W 12 V	E, P	–	–
2 + 1 (6) x 21 W + 5 W 12 / 24 V	E, P	P	–
3 + 1 (8) x 21 W 12 / 24 V	P	P	–
2 + 1 + 1 (8) x 21 W 12 V	P	P	P

The dual-circuit test circuit

Dual-circuit units (separate test circuits for trailer and towcar) are typical in large commercial vehicles and help to minimise power losses caused by long cables and numerous connectors.

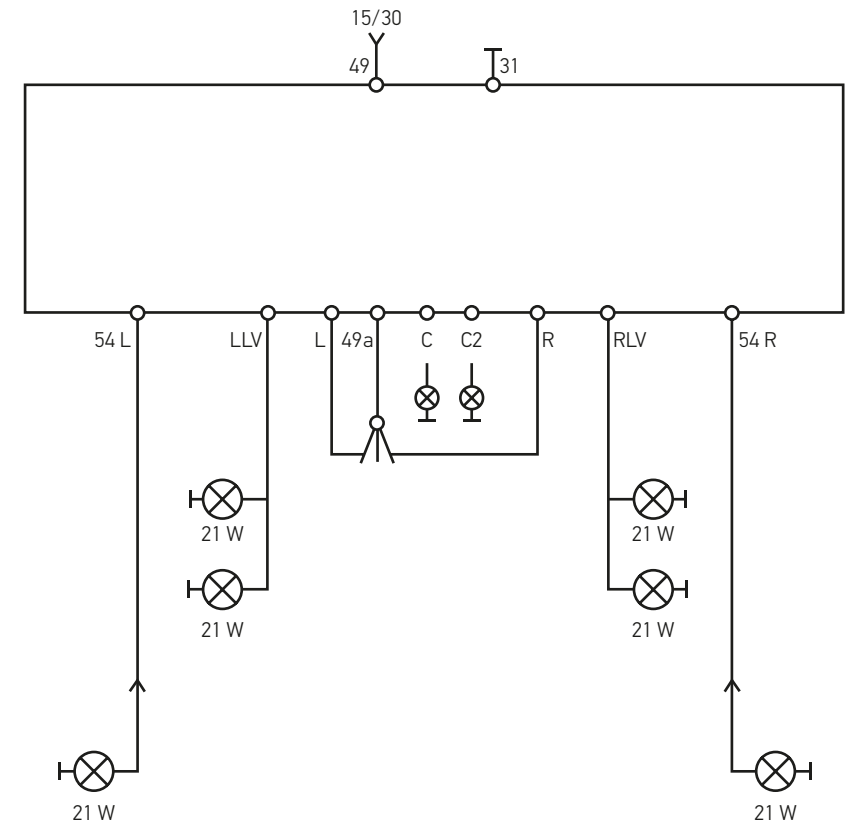


Load case variant	Control types:	
	Towcar	1st trailer
2 + 1 (6) x 21 W 12 / 24 V	E, P	P
3 + 1 (8) x 21 W 12 / 24 V	E, P	P

The three-circuit test circuit

Three-circuit units (separate test circuits for front and rear indicators of the towcar and of the trailer) are useful for commercial vehicles and buses and help to minimise power losses caused by long cables and numerous connectors.



Due to the complexity of wiring, they are less common.

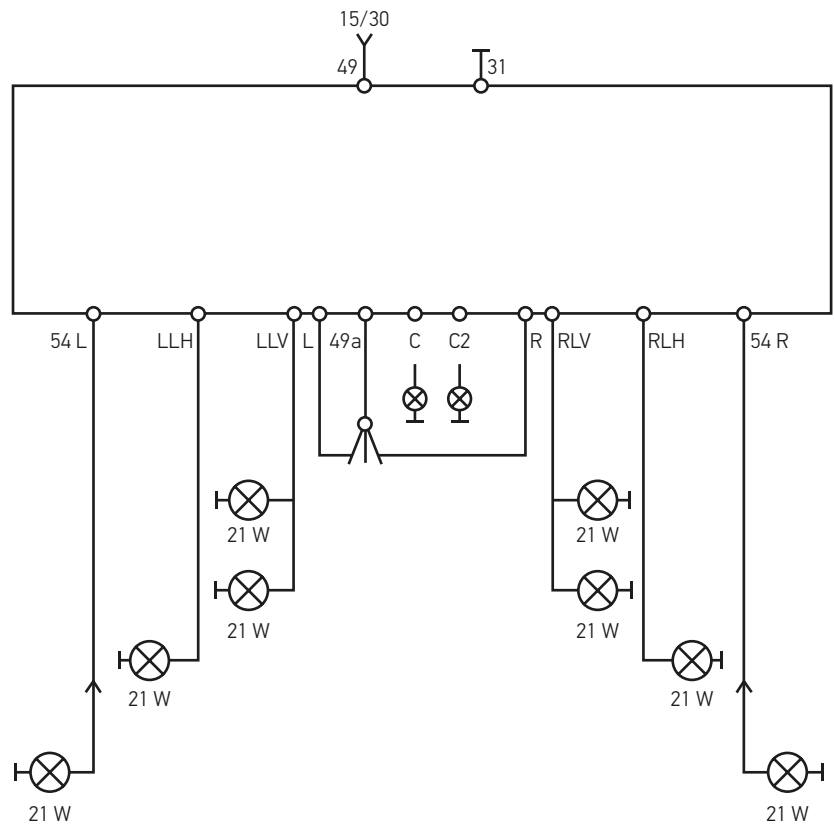

Load case variant	Control types:	
	Towcar	1st trailer
1 + 1... 3 + 1... 3 x 21 W 24 V	P	P
1 + 1... 3 + 1... 3 x 21 W 24 V	P	P



BG1

**Flashing frequency***

90 ± 15 per minute

Lit time*

50 ± 8 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 10 – 140 W, 3-pole, universal, pulse generator, without failure control

PU

1

Part number**4AZ 001 879-041****

BG1

**Flashing frequency***

90 ± 30 per minute

Lit time*

50 ± 5 %

Voltage range: 10 to 15 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 3-pole

PU

1

Part number**4DB 003 750-721**

BG

**Flashing frequency***

90 ± 15 per minute

Lit time*

46,5 ± 8,5 %

Voltage range: 5 to 7.5 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



6 V, 4-pole, universal, pulse generator, without failure control

PU

1

Part number**4AZ 003 787-051****

BG

**Flashing frequency***

90 ± 20 per minute

Lit time*

50 ± 10 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 4-pole, Universal, pulse generator, without failure control

PU

1

Part number**4AZ 003 787-081****

BG2

**Flashing frequency***

80 ± 15 per minute

Lit time*

50 ± 10 %

Voltage range: 11 to 15 V, Temperature range: -20 to +60°C, Bracket: Yes

Description



12 V, 4-pole

PU

1

Part number**4DB 001 887-041**

BG3

**Flashing frequency***

87.5 ± 12.5 per minute

Lit time*

50 ± 3 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description

12 V, 4-pole, 31 + C2 on top of housing

12 V, 4-pole, 31 + C2 on top of housing

PU

1

200



Part number**4DM 003 360-021****4DM 003 360-027**

* At room temperature and test voltage

** Not permitted under StVZO (German Road Vehicle Registration Regulation)



BG5

**Flashing frequency***

85 ± 15 per minute

Lit time*

50 ± 3 %

Voltage range: 11 to 15 V, Temperature range: -30 to +60°C, Bracket: Yes

Description



12 V, 5-pole

PU

1

Part number**4DM 003 460-021**

BG8

**Flashing frequency***

97 ± 10 per minute

Lit time*

50 ± 5 %

Voltage range: 10 to 15 V, Temperature range: -30 to +70°C, Bracket: Yes

Description



12 V, 6-pole, universal, pulse generator, without failure control

PU

100

Part number**4AZ 006 252-027****

BG7

**Flashing frequency***

90 ± 15 per minute

Lit time*

50 ± 5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 6-pole

PU

99

Part number**4DN 008 768-117**

BG7

**Flashing frequency***

90 ± 15 per minute

Lit time*

50 ± 5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description

12 V, 6-pole

PU

1



Part number**4DN 008 768-121**

12 V, 6-pole

99

4DN 008 768-127

BG7

**Flashing frequency***

90 ± 15 per minute

Lit time*

50 ± 5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description

12 V, 6-pole

PU

1

Part number**4DN 008 768-131**



12 V, 6-pole

72

4DN 008 768-137



BG7

**Flashing frequency***

90 ± 15 per minute

Lit time*

50 ± 5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 6-pole

PU

1

Part number**4DN 008 768-141**

BG7

**Flashing frequency***

90 ± 15 per minute

Lit time*

50 ± 5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 6-pole

PU

1

Part number**4DN 008 768-151**

BG7

**Flashing frequency***

90 ± 30 per minute

Lit time*

52,5 ± 22,5 %

Voltage range: 10.8 to 15 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



12 V, 6-pole

PU

250

Part number**4DN 996 173-017**

BG9

**Flashing frequency***

90 ± 15 per minute

Lit time*

37,5 ± 5,5 %

Voltage range: 10 to 32 V, Temperature range: -20 to +70°C, Bracket: Yes

Description



12 / 24 V, 6-pole

PU

1

Part number**4DZ 004 019-021**

BG10

**Flashing frequency***

87.5 ± 17.5 per minute

Lit time*

52,5 ± 7,5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description

12 V, 7-pole



PU

1

Part number**4DB 006 716-041**



BG1


Flashing frequency*

90 ± 15 per minute

Lit time*

50 ± 10 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: No

Description



12 V, 3-pole

PU

1

Part number
4DB 003 750-391


BG1


Flashing frequency*

90 ± 30 per minute

Lit time*

57,5 ± 17,5 %

Voltage range: 10 to 15 V, Temperature range: -40 to +85°C, Bracket: No

Description



12 V, 3-pole, for motorbikes

PU

250

Part number
4DB 003 750-702


BG1


Flashing frequency*

90 ± 30 per minute

Lit time*

50 ± 5 %

Voltage range: 10 to 15 V, Temperature range: -40 to +85°C, Bracket: No

Description

12 V, 3-pole

PU

1



Part number
4DB 003 750-711

12 V, 3-pole

150

4DB 003 750-717


BG4


Flashing frequency*

87.5 ± 12.5 per minute

Lit time*

50 ± 3 %

Voltage range: 10 to 15 V, Temperature range: -40 to +70°C, Bracket: No

Description



12 V, 4-pole

PU

1

Part number
4DB 007 218-001


BG3


Flashing frequency*

90 ± 20 per minute

Lit time*

50,5 ± 4,5 %

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: No

Description

12 V, 4-pole



PU

100



Part number
4DW 004 639-077



BG1





Flashing frequency*	Lit time*	
87 ± 18 per minute	50 ± 3 %	
Voltage range: 10 to 15 V, Temperature range: -30 to +60°C, Bracket: No		
Description	PU	Part number
12 V, 5-pole, 31 + C2 on top of housing	1	4DM 005 698-021



Flashing frequency*	Lit time*	
–	3 times / switch	
Voltage range: 9 to 15 V, Temperature range: -40 to +70°C, Bracket: No		
Description	PU	Part number
12 V, 5-pole	1	4LZ 003 750-401





BG7



Flashing frequency*	Lit time*	
90 ± 15 per minute	50 ± 5 %	
Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: No		
Description	PU	Part number
12 V, 6-pole	1	4DN 008 768-101



BG1


Flashing frequency*

90 ± 15 per minute

Lit time*

50 ± 8 %

Voltage range: 18 to 32 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



24 V, 3-pole, universal, pulse generator, without failure control

PU

1

Part number
4AZ 001 879-051**


BG


Flashing frequency*

90 ± 15 per minute

Lit time*

46,5 ± 8,5 %

Voltage range: 20 to 32 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



24 V, 4-pole, universal, pulse generator, without failure control

PU

1

Part number
4AZ 003 787-071**


BG2


Flashing frequency*

85 ± 15 per minute

Lit time*

50 ± 10 %

Voltage range: 22 to 30 V, Temperature range: -20 to +60°C, Bracket: Yes

Description



24 V, 4-pole

PU

1

Part number
4DB 009 123-031


BG4


Flashing frequency*

85 ± 15 per minute

Lit time*

50 ± 5 %

Voltage range: 20 to 30 V, Temperature range: -20 to +60°C, Bracket: Yes

Description



24 V, 4-pole

PU

1

Part number
4DB 009 123-041


BG6


Flashing frequency*

87.5 ± 12.5 per minute

Lit time*

48 ± 8 %

Voltage range: 21 to 31 V, Temperature range: -25 to +55°C, Bracket: Yes

Description



24 V, 5-pole

PU

1

Part number
4DM 003 474-001


BG6


Flashing frequency*

87.5 ± 12.5 per minute

Lit time*

48 ± 8 %

Voltage range: 21 to 31 V, Temperature range: -25 to +55°C, Bracket: Yes


Description

24 V, 5-pole


PU

126


Part number
4DM 003 474-017

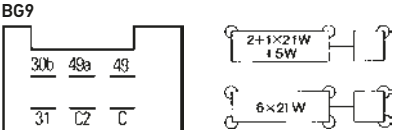


Flashing frequency*	Lit time*	
90 ± 15 per minute	48,5 ± 8,5 %	
Voltage range: 21.6 to 30 V, Temperature range: -40 to +85°C, Bracket: Yes		
Description	PU	Part number
24 V, 6-pole	1	4DM 003 944-091




Flashing frequency*	Lit time*	
90 ± 15 per minute	53,5 ± 8,5 %	
Voltage range: 21.6 to 30 V, Temperature range: -40 to +85°C, Bracket: Yes		
Description	PU	Part number
24 V, 6-pole	1	4DW 003 944-071



Flashing frequency*	Lit time*	
90 ± 20 per minute	53,5 ± 8,5 %	
Voltage range: 21.6 to 30 V, Temperature range: -40 to +85°C, Bracket: Yes		
Description	PU	Part number
24 V, 6-pole	1	4DW 003 944-105



Flashing frequency*	Lit time*	
85 ± 15 per minute	50 ± 20 %	
Voltage range: 20 to 30 V, Temperature range: -30 to +85°C, Bracket: Yes		
Description	PU	Part number
24 V, 7-pole	1	4DN 009 124-011

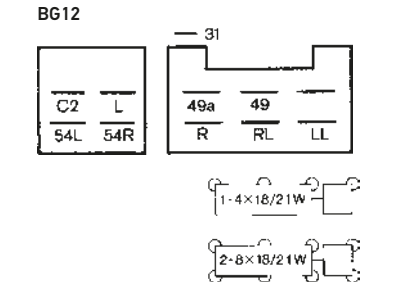


Flashing frequency*	Lit time*	
90 ± 30 per minute	50 ± 20 %	
Voltage range: 22 to 30 V, Temperature range: -30 to +70°C, Bracket: Yes		
Description	PU	Part number
24 V, 11-pole	1	4DZ 002 834-162

* At room temperature and test voltage
** Not permitted under StVZO (German Road Vehicle Registration Regulation)



BG1


Flashing frequency*

87.5 ± 12.5 per minute

Lit time*

50 ± 3 %

Voltage range: 20 to 30 V, Temperature range: -40 to +85°C, Bracket: No

Description



24 V, 3-pole

PU

1

Part number
4DB 003 675-011


BG3


Flashing frequency*

95 ± 20 per minute

Lit time*

50 ± 10 %

Voltage range: 20 to 30 V, Temperature range: -30 to +70°C, Bracket: No

Description



24 V, 4-pole, silent

PU

1

Part number
4DW 004 513-021


BG3


Flashing frequency*

95 ± 20 per minute

Lit time*

50 ± 10 %

Voltage range: 20 to 30 V, Temperature range: -30 to +70°C, Bracket: No

Description



24 V, 4-pole, silent

PU

1

Part number
4DW 004 513-031


BG3


Flashing frequency*

90 ± 15 per minute

Lit time*

48,5 ± 8,5 %

Voltage range: 20 to 30 V, Temperature range: -40 to +85°C, Bracket: No

Description

24 V, 4-pole

24 V, 4-pole



PU

1

180

Part number
4DM 004 639-061
4DM 004 639-067


BG9


Flashing frequency*

90 ± 30 per minute

Lit time*

57,5 ± 17,5 %



Voltage range: 21 to 28 V, Temperature range: -40 to +85°C, Bracket: No

Description

24 V, 6-pole

PU

162

Part number
4DM 006 475-087

Flashing frequency*

90 ± 25 per minute

Lit time*

52 ± 8 %

Voltage range: 22 to 30 V, Temperature range: -30 to +70°C, Bracket: No

Description

24 V, 16-pole



PU

1

Part number
4DN 007 431-201



BG1

**Flashing frequency***

60–120 per minute

Lit time*



50 ± 10 %

Voltage range: 9 to 33 V, Temperature range: -40 to +85°C, Bracket: No

Description	PU	Part number
9–33 V, 3-pole	1	4JZ 177 846-001
9–33 V, 3-pole	24	4JZ 177 846-007



BG2

**Flashing frequency***

90 ± 30 per minute

Lit time*



57,5 ± 17,5 %

Voltage range: 10 to 15 V, Temperature range: -40 to +85°C, Bracket: Yes

Description	PU	Part number
12 V, 4-pole	1	4DW 009 492-111



BG13

**Flashing frequency***

90 ± 30 per minute

Lit time*



57,5 ± 17,5 %

Voltage range: 10 to 15 V, Temperature range: -40 to +85°C, Bracket: Yes

Description	PU	Part number
12 V, 5-pole	1	4DN 009 492-101



BG2

**Flashing frequency***

90 ± 30 per minute

Lit time*



57,5 ± 17,5 %

Voltage range: 18 to 32 V, Temperature range: -40 to +85°C, Bracket: Yes

Description	PU	Part number
24 V, 4-pole	1	4DM 009 492-001



BG2

**Flashing frequency***

90 ± 30 per minute

Lit time*

57,5 ± 17,5 %

Voltage range: 18 to 32 V, Temperature range: -40 to +85°C, Bracket: Yes

Description	PU	Part number
24 V, 4-pole	1	4DW 009 492-011



10R - 054641

LED- Blinkgeber

LED- Flasher- Unit

4DW 009 492-01

24V 3+1

Made in Germany

>PA6.6GF30<

C2

IV/17

49

31

49a



GENERAL AND ELECTRICAL DATA

Rated Voltage	12 V	24 V
Test voltage	13 V	28 V
Test temperature	23°C ± 5°C	23°C ± 5°C
Flashing cycle	90 ± 30 Flashing cycle/min	90 ± 30 Flashing cycle/min
Lit time normal	50 % ± 10 %	50 % ± 10 %
Lit time with rapid flashing	40 % ± 5 %	40 % ± 10 %
Control type	E / P, EP, PP, PPP	EP, PP
Voltage drop 49 → 49a	49 → 49a < 450 mV	450 mV
Short-circuit strength 49 → 49a	49 → 49a 15 A fuse	15 A fuse
Minimum device protection	IP 54 according to ISO 20653	IP 54 according to ISO 20653

Legal regulations for flasher units

HELLA flasher units comply with national and international regulations:

- StVZO Article 54 direction indicators
- ECE guideline 48 lighting devices
- EC Directive 76/756 lighting devices
- US Federal Standard FMV88 108 lighting devices
- SAE J590 turn signal flashers
- SAE J945 vehicle hazard warning signal flashers
- EC Directive 72/245 radio interference

Legal requirement in all ECE states

In the case of vehicles approved for use on public roads, the indicators must be monitored: the failure of an indicator must be shown optically or acoustically in the vehicle. This applies to all ECE states in which regulation ECE R 48 is in effect.

This means possible indicator failure must be monitored by the vehicle. Manufacturers use different control procedures for this.

The failure controls currently in use cannot detect simple LED lights and indicate a fault. Many HELLA LED indicators have integrated failure control electronics. The indicators are selfmonitoring. When functioning correctly, they create a pulse according to ISO 13207-1 which can be evaluated by the vehicle electronics. If the available vehicle electronics cannot evaluate the pulse themselves, HELLA provides various solutions for evaluating this pulse, shown below.

As soon as a single LED fails, the light may be considered faulty, as the impulse is not generated. In this case, for instance, the ballast switches off the bulb simulation and the flasher unit reports the error to the driver.

Safe conversion to LED indicators using HELLA electronics according to ISO 13207-1

As indicators must be checked by law, we recommend operating the lights only in conjunction with a failure control according to ISO 13207-1.

For LED indicators with a control pulse, HELLA offers electronic ballasts which make it possible to display indicator failure for various vehicle assemblies and modifications. This is necessary if the vehicle manufacturer does not guarantee indicator bulb failure control via the vehicle electric system.

There are three different ballasts and several different LED indicators available:

As a new solution, HELLA recommends detecting the electrical pulse directly in the vehicle manufacturer's vehicle electric system. It is merely necessary to integrate the check according to ISO 13207-1. This obviates the need for interim solutions via the indicator control units.

LED light failure control and correct electrical connection

Operation of the LED lamp with alternating voltage or clocked direct voltage is not permitted. The individual light functions may only be operated with a vehicle fuse of max. 3A.

Due to the low watt output of LED lights, which are distinctly different from a bulb version, problems can arise in bulb failure control when operating traction vehicles. As checking of the indicators is required by law, we recommend operating the light only in conjunction with the indicator control unit, HELLA part no. 5DS 009 552-xxx.

In addition, further lighting functions are detected by some towing vehicles. This is a vehicle comfort function which is not required by legislation and does not release drivers from their obligation to see for themselves that the lighting equipment is working. Here, too, faulty diagnosis can occur on account of the low power levels involved (instrument panel in the driver cab indicates light failure although the function is working).

Should misdiagnosis occur, as described above, while operating your traction vehicle, please contact the traction vehicle manufacturer.



LED light control unit




LED flasher unit



Simulation device for the check control



Vehicle electric system check according to ISO 13207-1

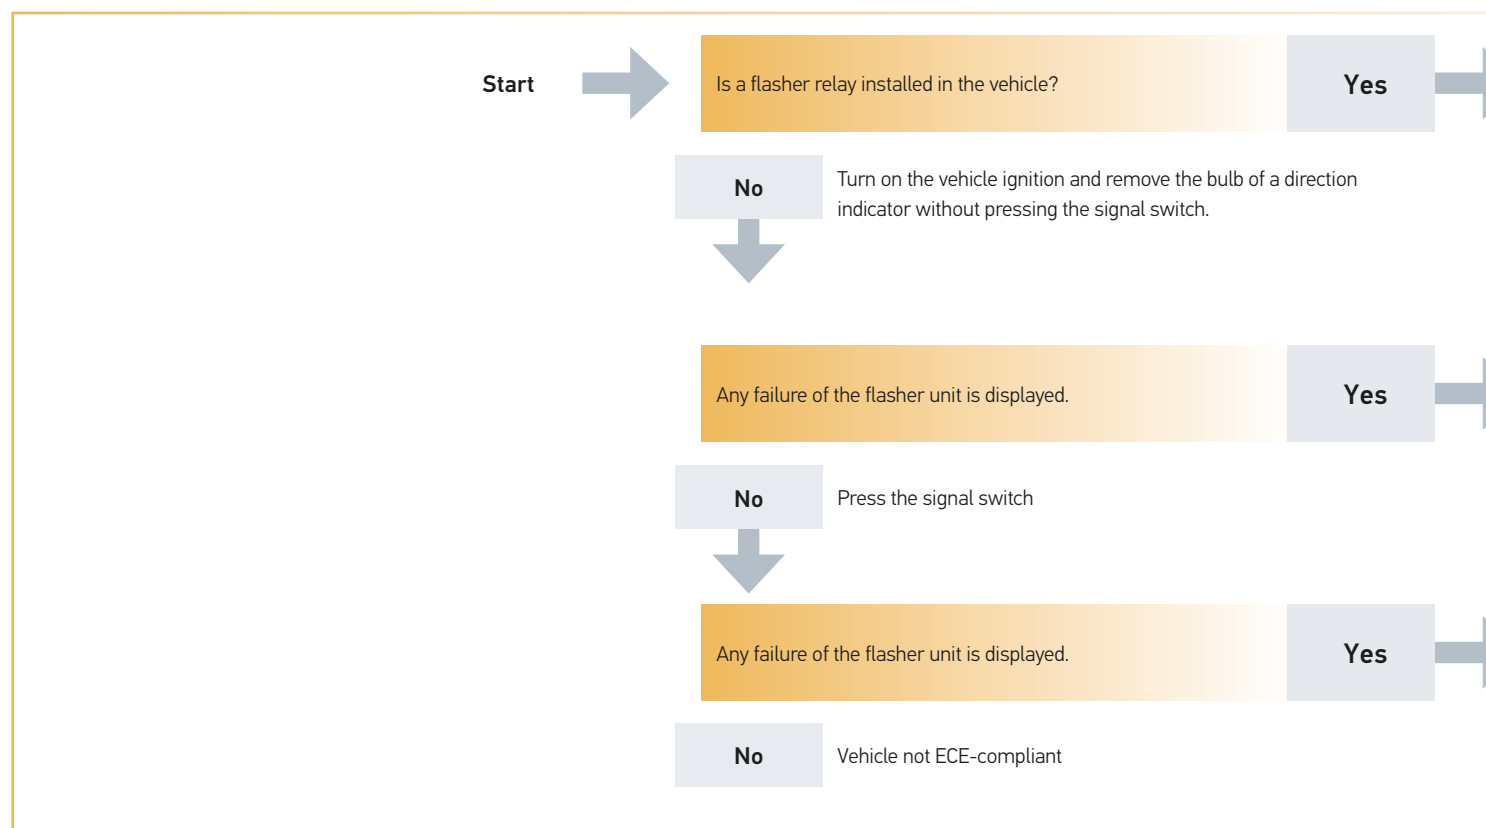**UNIVERSAL SOLUTION**

for 24 V vehicle electric systems

ISO 13207-1 SOLUTION

for 24 V vehicle electric systems

**Solution 1:
LED flasher unit**

	12 V	24 V
Operating Voltage	10 – 15 V	18 – 32 V
Functional voltage	11 – 14 V	20 – 28 V
Operating temperature	- 40° bis + 85°C	-40° to +85°C
Protection class	IP 53 (contacts underneath)	IP 53 (contacts underneath)
LED flasher unit 3+1		
	4DW 009 492-111	4DW 009 492-011
LED flasher unit 2+1		
	–	4DM 009 492-001
LED flasher unit 2+1+1		
	4DM 009 492-101	–

**Solution 2:
Simulation device for the check control**

	12 V	24 V
Operating Voltage	9 – 16 V	18 – 32 V
Rated current	1,5 A	1,5 A
Operating temperature	- 40° bis + 85°C	- 40° bis + 85°C
Protection class	IP 54 (contacts underneath)	IP 54 (contacts underneath)
Simulation device		
	5DS 009 602-011	5DS 009 602-001

Solution 1:

Replace the existing indicator unit with an LED indicator unit from HELLA with an ISO pin base

One flasher unit per vehicle required. Any possible combination of bulbs and HELLA LED direction indicators is permitted: from a full package with bulbs through mixed versions to a full package with LED lights. Bulbs or HELLA LED direction indicators are also permitted on trailers.


Solution 2:

Through simulation unit for cold check

One simulation device is required per LED light.


Solution 3:

By LED light control unit

Two LED direction indicators can be monitored per vehicle using one simulation device.

(Only one simulation device per vehicle can be used.)


Solution 3:

By LED light control unit


Solution 4:

By monitoring in compliance with ISO 13207-1 in the vehicle manufacturer's vehicle electric system.



Failure pulse according to ISO 13207-1

2BA 959 070-631



2BA 959 050-401



2BA 959 822-601



2BA 344 200-...



2BA 343 390-...



2SD 343 910-...


Solution 3:
LED light control unit

	12 V	24 V
Current consumption (min.)	1,4 A	0,78 A
Current consumption (max.)	2 A	0,9 A
Basic control unit		
	5DS 227 488-001	5DS 227 488-101


Solution 4:
Light control unit with integrated check of the failure pulse according to ISO 13207-1

In future, vehicle manufacturers' light control units will be able to check the failure pulse in a standardised and unified manner according to ISO 13207-1.

Interim solutions 1 to 3 are therefore unnecessary, as communication takes place directly with the indicators. HELLA recommends this solution.


Since not every vehicle currently has its own vehicle electric system, this solution must be integrated.

Key components of a wash/wipe interval control unit



Legend

- 1 Blade terminal made of E-Cu with tin-plated surface
- 2 Base plate
- 3 Capacitor
- 4 PCB relay
- 5 SMD components (resistors, diodes etc.)



Functional principle

The wash/wipe interval control unit essentially comprises a pulse generator with a fixed or variable pulse/pause ratio. Every pulse with which the wipe/wash motor is controlled via a relay causes a one-off back-and-forth movement of the windshield wipers. Depending on the design, the length of the wipe pause is 4 s to X s.

The WWI control unit comprises the following:

- PCB with electronic components, blade terminals and a PCB relay
- Synthetic material housing, sometimes with holder


Similarly to flasher units, the timer is designed as an astable multivibrator in the wipe/wash interval control unit. A failure control stage as required by the flasher system is not needed for the WWI control unit.

HELLA also supplies headlight washer systems which clean the headlights using a spray of high-pressure water. Depending on the variant, the length of the spray varies between 0.4 s and 0.8 s.




Rated Voltage

- 12 V: for passenger cars, agricultural and construction machinery etc.
- 24 V: for commercial vehicles, buses, municipal vehicles etc.



Rated load, rated switching current

- 3.5 A to 10 A, depending on vehicle type





Contacts and connector configurations

Wash/wipe interval control units

I	Intermittent wiping (input)
S, 53 M	Wiper motor field winding (output)
T, 86	Wash button (input)
15	Battery +, switched (input)
31	Ground
31b, 53S	Wiper motor cam switch/park position/limit switch (input)



Headlight cleaning system control unit

P	Water pump (output)
S	Actuating switch (input)
30	Load current +, terminal 15 (input)
31	Ground
56	Light (input)





Function times	Load current
4 ± 1 s release delay*	max. 10 A
1 s turn-on delay**	
5 ± 1 s pause time**	
Voltage range: 9 to 16 V, Temperature range: -30 to +70°C, Bracket: Yes	

Description	PU	Part number
12 V, 6-pole	1	5WG 002 450-111




Function times	Load current
4 ± 1 s release delay*	max. 3,5 A
1 s turn-on delay**	
5 ± 1 s pause time**	

Description	PU	Part number
12 V, 6-pole	1	5WG 002 450-311
12 V, 6-pole	100	5WG 002 450-317





Function times	Load current
5.3 s release delay*	max. 12 A
0.5 s turn-on delay**	
1.3–22.5 s pause time**	
Voltage range: 9 to 15 V, Temperature range: -40 to +70°C, Bracket: No	

Description	PU	Part number
12 V, 6-pole	1	5WG 002 450-321



Function times	Load current
6 ± 1 s release delay*	max. 5 A
1 s turn-on delay**	
6 ± 1 s pause time**	

Description	PU	Part number
12 V, 6-pole	1	5WG 003 620-081
12 V, 6-pole	196	5WG 003 620-087




Function times	Load current
6 ± 1 s release delay*	max. 5 A
1 s turn-on delay**	
15 s pause time**	

Description	PU	Part number
12 V, 6-pole	1	5WG 003 620-091
12 V, 6-pole	100	5WG 003 620-097



Function times	Load current
3.9 ± 1 s release delay*	max. 20 A
0.8 to 0.4 s turn-on delay**	
6.5 ± 1.5 s pause time**	


Description	PU	Part number
12 V, 6-pole	1	5WG 996 165-001



Function times	Load current
4 ± 1 s release delay*	max. 10 A
1 s turn-on delay**	
5 ± 1 s pause time**	

Voltage range: 21 to 30 V, Temperature range: -30 to +70°C, Bracket: Yes


Description	PU	Part number
24 V, 6-pole	1	5WG 002 450-121
24 V, 6-pole	25	5WG 002 450-127



Function times	Load current
4 ± 1 s release delay*	max. 3.5 A
1 s turn-on delay**	
5 ± 1 s pause time**	

Voltage range: 21.2 to 30 V, Temperature range: -40 to +85°C, Bracket: Yes


Description	PU	Part number
24 V, 6-pole	50	5WG 002 450-287



Function times	Load current
4 ± 1 s release delay*	max. 3,5 A
1 s turn-on delay**	
5 ± 1 s pause time**	

Voltage range: 21.2 to 30 V, Temperature range: -40 to +85°C, Bracket: Yes



Description	PU	Part number
24 V, 6-pole	1	5WG 002 450-291
24 V, 6-pole	100	5WG 002 450-297





Function times	Load current
4 ± 1 s release delay*	max. 3.5 A
1 s turn-on delay**	
5 ± 1 s pause time**	

Voltage range: 21.2 to 30 V, Temperature range: -40 to +85°C, Bracket: No



Description	PU	Part number
24 V, 6-pole	1	5WG 002 450-301





Duty time Output		
0,43 ± 0,02 s		
Voltage range: 18 to 30 V, Temperature range: -40 to +90°C		
Description	PU	Part number
24 V, 5-pole	1	5WD 003 547-071



Duty time Output		
0,8 ± 0,04 s		
Voltage range: 9 to 15 V, Temperature range: -40 to +90°C		
Description	PU	Part number
12 V, 5-pole	1	5WD 005 674-131



Duty time Output		
0,8 ± 0,04 s		
Voltage range: 18 to 30 V, Temperature range: -40 to +90°C		
Description	PU	Part number
24 V, 5-pole	1	5WD 005 674-141
24 V, 5-pole	12	5WD 005 674-147



Function times

Load current

Clearing time control 1:
 $t_1 = 0.8 \pm 0.4$ s
 Clearing time control 2:
 t_2 is variable (max. 20 ± 8 s)

max. 15 A

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: Yes

Description



PU

Part number

12 V, 5-pole

1

5WA 001 871-061



Function times

Load current

Clearing time control 1:
 $t_1 = 0.8 \pm 0.4$ s
 Clearing time control 2:
 t_2 is variable (max. 20 ± 8 s)

max. 15 A

Voltage range: 18 to 30 V, Temperature range: -40 to +85°C, Bracket: Yes

Description


PU

Part number

24 V, 5-pole

1

5WA 001 871-071



Functional principle

Diesel engines are compression-ignition engines, this means that an additional heat source is not needed to ignite the fuel/air mixture in the cylinder. When the engine temperature is colder glow plug ensure ignition process, 1 glow plug per cylinder, glow plug increases the temperature up to 1,000 °C in the cylinder's combustion chamber prior to the engine starting.

The time required for „pre-heating“ will vary depending on the glow plug used. Fast glow plugs only need a pre-heating time of just a few seconds. Other glow plugs must pre-heat for up to 15 seconds at low ambient temperatures. The glow plug relay is responsible for switching the current for the glow plugs on and off as well as taking care of timing.

Glow plug control unit switches known as power relays are built into the glow plug relay (glow time control unit) to switch the current for the glow plugs on and off. If they are already hot, glow plus need a current of approx. 10 A. However, during the ON phase (when the glow coil is cold), the current is much higher. In the case of a 4-cylinder engine, the power relays must be able to switch currents of up to 80 A. This figure is even higher in the case of 6-cylinder and 8-cylinder engines. Therefore, the glow plugs to be controlled are often distributed across two circuits. Accordingly, there are then two power relays in the glow plug relay.

Phases of the time control:

→ The pre-heating time:

Is determined by the engine type, the glow plug used and the ambient temperature measured with a temperature sensor that can be in the relay itself or externally such as within the cooling system. In winter, at temperatures below 0 °C, the pre-heating time is much longer than it is in summer with temperatures up to +30 °C. During the pre-heating time, the pre-heating indicator lamp in the car's dashboard lights up. In some vehicles, the pre-heating time starts when the driver opens the driver's door.

→ The stand-by time (supply time):

Starts immediately after the pre-heating time, the indicator lamp is switched off, but the glow plugs remain switched on for a few seconds. At this time, the engine should be started by the driver.

→ The post-heating time:

Was introduced in newer car models to optimise the combustion process within the engine and thus ensure lower exhaust gas emissions. The glow plugs are switched on in this time of post-heating even if the engine is running. The duration of the post-heating time depends on the engine temperature and engine type. In these cases, special glow plugs are used for this function.

Full electronic glow plug time relays:

Are control units-glow plug systems which are connected to the engine control unit (ECU) via data bus, they support diagnostics and are attached to the On-Board Diagnostics (OBD). The ECU transmits the commands for switching on or off, it is also measured if enough current is flowing after switching on a glow plug. This is then fed back to the engine control unit in the form of an acknowledgement signal, if a current is too high (e.g. in case of a short-circuit in the cable or glow plug), the corresponding current is switched off in order to avoid destruction of the electronics.

Control units-glow plug systems have another particular feature: the use of power transistors (electronic switches) rather than relays for switching on and off. Power transistors not only support switching glow plugs on and off, they also allow current changed in amperage, this is achieved by means of a variable duty cycle, the current is switched on and off at very short intervals during the current control phase. If the ON time is longer than OFF time, the glow plug gets more power and becomes hotter, the glow plug is turned around less hot if the „on-time“ is shorter than the „off-time“.

Glow plug control units are mounted into different locations of the vehicle . Plug-in relays can be found in the central relay box. Relays without plug-in contact for glow plug controllers, but plug contacts to be screwed are found in the engine compartment. These relays are screwed directly at the splash guard or with special attaching brackets onto the splash panel or to the car body (in the latter case via the intermediary of special attachment brackets).

Safety:

As the relays in the engine compartment are exposed to the prevailing influences there, they must be designed accordingly. Cold in winter, very high temperatures at times in the summer, moisture, fluids such as salt water, cleaning agents, etc. must not be allowed to harm a glow time relay. Plug connectors must always be corrosion-free and clean. Otherwise, contact resistances could cause malfunctions or even cable fires.


Depreciation:

Correct function for glow plug systems: only glow plug relays with matching reference numbers should be replaced like for like. Even if the housing and the plug connector, including the number of contacts, are the same, the internal function might be different. Where pre-heating times are concerned, for example, times for fast glow plugs are much shorter than for normal glow plugs. Installing the wrong relay can damage the glow plugs.




Rated Voltage

→ 12 V: for passenger cars, vans etc.




Rated load, rated switching current

→ Switch currents of up to 80 A: for passenger cars, vans etc.




Contacts and connector configurations


15	Ignition plus
30, B+	Battery plus
31	Ground
50	Starter control
85, 31	Output (earth)
86, 15	Winding start
87	Relay contact in the case of normally closed and change-over / input
G1, G1 – G6	Output for glow plugs
T	Time
ST	Control
DI	Diagnostic




Rated switching current*	Number of switching operations	
max. 40 A	min. 50,000, max. 100,000	
Coil resistance: 70 ohm, Parallel resistance: 562 ohm, Operate time: 8 sec		
Description	PU	Part number
12 V, 4-pole	1	4RA 007 507-021




Rated switching current*	Number of switching operations	
max. 40 A	min. 50,000, max. 100,000	
Coil resistance: 70 ohm, Parallel resistance: 562 ohm, Operate time: 8 sec		
Description	PU	Part number
12 V, 4-pole	1	4RA 007 507-031



Preheating time		
at +20°C / < 14 sec		
Description	PU	Part number
12 V, 6-pole	1	4RV 008 188-081





Preheating time		
at +20°C / < 8 sec		
Description	PU	Part number
12 V, 6-pole	1	4RV 008 188-091



Preheating time		
at +20°C / < 8 sec		
Description	PU	Part number
12 V, 6-pole	1	4RV 008 188-101



* At 80°C ambient temperature



Preheating time

at +20°C / < 7 sec

Description	PU	Part number
12 V, 6-pole, after-glow capable	1	4RV 008 188-111





Rated switching current*

max. 70 A

Preheating time

at +20°C / < 8 sec

Description	PU	Part number
12 V, 6-pole	1	4RV 008 188-161





Rated switching current*

max. 70 A

Preheating time

at +20°C / < 6 sec

Description	PU	Part number
12 V, 6-pole, after-glow capable	1	4RV 008 188-221





Rated switching current*

max. 70 A

Preheating time

at +20°C / < 8 sec

Description	PU	Part number
12 V, 7-pole, after-glow capable	1	4RV 008 188-171





Rated switching current*

max. 70 A



Preheating time

at +20°C / < 7 sec



Description	PU	Part number
12 V, 7-pole, after-glow capable	1	4RV 008 188-181





Rated switching current*	Preheating time	
max. 70 A	at +20°C / < 9 sec	
Description	PU	Part number
12 V, 7-pole	1	4RV 008 188-191





Rated switching current*	Preheating time	
max. 70 A	at +20°C / < 10 sec	
Description	PU	Part number
12 V, 7-pole	1	4RV 008 188-271



Rated switching current*	Preheating time	
max. 70 A	at +20°C / < 7 sec	
Description	PU	Part number
12 V, 7-pole, after-glow capable, Terminal S = postheating cut-out	1	4RV 008 188-281



Rated switching current*	Preheating time	
max. 70 A	at +20°C / < 8 sec	
Description	PU	Part number
12 V, 7-pole, after-glow capable	1	4RV 008 188-301



Rated switching current*	Preheating time	
max. 140 A	at +20°C / < 12 sec	
Description	PU	Part number
12 V, 7-pole, after-glow capable	1	4RV 008 188-331

* At 80°C ambient temperature



Preheating time

The preheating time is determined by the ECU inside the vehicle


Description	PU	Part number
12 V, 7-pole	1	4RV 008 188-591



Preheating time

The preheating time is determined by the ECU inside the vehicle


Description	PU	Part number
12 V, 7-pole	1	4RV 008 188-601



Preheating time

The preheating time is determined by the ECU inside the vehicle

Description	PU	Part number
12 V, 8-pole	1	4RV 008 188-571

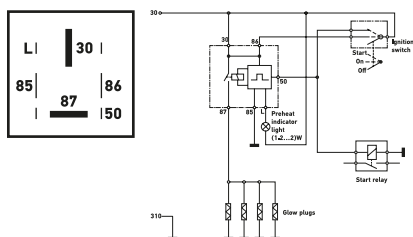


Rated switching current*

max. 70 A

Preheating time

at +20°C / < 6–7 sec

Description	PU	Part number
12 V, 8-pole	1	4RV 996 172-007




Rated switching current*

max. 80 A

Preheating time

at +20°C / < 9 sec

Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-001




Rated switching current*	Preheating time	
max. 70 A	at +20°C / < 8 sec	
Description	PU	Part number
12 V, 9-pole, after-glow capable, Terminal S = postheating cut-out	1	4RV 008 188-321




Preheating time		
The preheating time is determined by the ECU inside the vehicle		
Bracket: Yes		
Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-461



Preheating time		
The preheating time is determined by the ECU inside the vehicle		
Bracket: Yes		
Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-471




Preheating time		
The preheating time is determined by the ECU inside the vehicle		
Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-481




Preheating time		
The preheating time is determined by the ECU inside the vehicle		
Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-491

* At 80°C ambient temperature

**Preglow time**


The preheating time is determined by the ECU inside the vehicle

Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-611

**Preglow time**

The preheating time is determined by the ECU inside the vehicle

Description	PU	Part number
12 V, 9-pole	1	4RV 008 188-621


**Rated switching current***

max. 80 A

Preglow time

at +20 °C / < 9 sec

Description	PU	Part number
12 V, 10-pole	1	4RV 008 188-021


**Rated switching current***

max. 80 A

Preglow time

bei +20 °C / < 9 s

Description	PU	Part number
12 V, 10-pole, after-glow capable	1	4RV 008 188-041


**Rated switching current***

max. 80 A


Preglow time

at +20 °C / < 9 sec


Description	PU	Part number
12 V, 10-pole, after-glow capable	1	4RV 008 188-051




Preheating time		
at +20°C / < 7 sec		
Description	PU	Part number
12 V, 10-pole, after-glow capable	1	4RV 008 188-371




Preheating time		
The preheating time is determined by the ECU inside the vehicle		
Description	PU	Part number
12 V, 10-pole	1	4RV 008 188-371



Preheating time		
The preheating time is determined by the ECU inside the vehicle		
Description	PU	Part number
12 V, 11-pole	1	4RV 008 188-581



Rated switching current*		Preheating time
max. 80 A		at +20°C / < 9 sec
Description	PU	Part number
12 V, 11-pole, after-glow capable	1	4RV 008 188-061



Rated switching current*		Preheating time
max. 80 A		at +20°C / < 9 sec
Description	PU	Part number
12 V, 12-pole, after-glow capable	1	4RV 008 188-071

* At 80°C ambient temperature



236
4 RV 008 188-48

Made in India

G1 G2 G3 G4



G5 87 31 G6



D1 30 ST




Key components of a time relay



Legend

- 1 Blade terminal made of E-Cu with tin-plated surface
- 2 Base plate
- 3 Potentiometer (for fine adjustment of delay time)
- 4 DIP switch (for setting the time base)
- 5 PCB relay



Functional principle

A time relay is a combination of an electromechanical output relay and a control circuit.

The time relay is available in two variants:

- **Pick-up delay:** the control circuit is activated by applying a voltage to the device input. Depending on the set time, the relay is then switched on with a delay. After deactivating the input, the relay voltage drops immediately.
- **Drop-off delay:** the relay is switched on immediately by applying a voltage to the input of the monovibrator. After deactivating the input, the relay voltage drops after a predetermined time.

HELLA also supplies time relays with neither pick-up nor drop-off delay. In this case, the output is activated or switched on for a specific period of time.


The delay or turn-on time can be adjusted with a DIP switch and fine-tuned with a potentiometer.

If a more powerful relay is used, higher current strengths or different load types – e.g. inductive, capacitive/ lamps – can be easily activated.




Rated Voltage

- 12 V: for passenger cars, agricultural and construction machinery etc.
- 24 V: for commercial vehicles, buses, municipal vehicles etc.



Rated load, rated switching current

- Up to 20 A, make contact
- Up to 10 A, break contact





Contacts and connector configurations

HL	Handbrake control (input)
HK	Handbrake contact (input)
L, 87	Load current, make contact (output)
N	Emergency-off switch (input)
S, 15	Actuating switch (input)
SK	Grounding contact (input)
30	Load current +, terminal 15 (input)
31	Ground
87a	Load current, break contact (output)



Z2

**Duty time Output** $2 \pm 0,7 \text{ s}$ **Load current**

max. 0.31 A

Voltage range: 10 to 15 V, Temperature range: -10 to +60°C, Bracket: No

Description



12 V, 2-pole, with turn-off delay

PU

250

Part number**5HE 003 724-027**

Z3

**Duty time Output** $25 \pm 5 \text{ s}$ **Load current**

max. 10 A

Voltage range: 10 to 15 V, Temperature range: -20 to +85°C, Bracket: No

Description



12 V, 4-pole

PU

1

Part number**5HE 004 911-037**

Z1

**Duty time Output** $5 \pm 1,5 \text{ s}$ **Load current**

max. 10 A

Voltage range: 9 to 16 V, Temperature range: -40 to +85°C, Bracket: No

Description



12 V, 5-pole

PU

100

Part number**5HE 006 207-027**

Z

**Duty time Output** $0 \text{ to } 900 \pm 90 \text{ s}$ **Load current**

min. 10 A, max. 20 A

Voltage range: 9 to 16 V, Temperature range: -25 to +80°C, Bracket: Yes

Description



12 V, 5-pole, with turn-off delay

PU

1

Part number**5HE 996 152-131**

Z

**Duty time Output** $0 \text{ to } 900 \pm 90 \text{ s}$ **Load current**

min. 10 A, max. 20 A

Voltage range: 9 to 16 V, Temperature range: -25 to +80°C, Bracket: Yes



Description

12 V, 5-pole, with turn-on delay

PU

1

Part number**5HE 996 152-151**



Duty time Output

 $10 \pm 2,5 \text{ s}$

Load current

max. 7.5 A

Voltage range: 20 to 32 V, Temperature range: -20 to +70°C, Bracket: No



Description

24 V, 5-pole

PU

180

Part number

5HE 005 922-017


Duty time Output

 $0 \text{ to } 900 \pm 90 \text{ s}$

Load current

min. 10 A, max. 20 A

Voltage range: 18 to 32 V, Temperature range: -25 to +80°C, Bracket: Yes



Description

24 V, 5-pole, with turn-off delay

PU

1

Part number

5HE 996 152-141


Duty time Output

 $0 \text{ to } 900 \pm 90 \text{ s}$

Load current

min. 10 A, max. 20 A

Voltage range: 18 to 32 V, Temperature range: -25 to +80°C, Bracket: Yes



Description

24 V, 5-pole, with turn-on delay

PU

1

Part number

5HE 996 152-161


Duty time Output

 $5 \pm 0,5 \text{ s}$

Load current

min. 10 A, max. 20 A

Voltage range: 18 to 32 V, Temperature range: -25 to +80°C, Bracket: Yes



Description

24 V, 5-pole, with turn-off delay

PU

200

Part number

5HE 996 152-177


Duty time Output

 $1,5 \pm 0,5 \text{ s}$

Load current

max. 3 A

Voltage range: 18 to 32 V, Temperature range: -40 to +85°C, Bracket: No

Description



24 V, 6-pole, with turn-on delay

PU

1

Part number

5HE 004 236-017


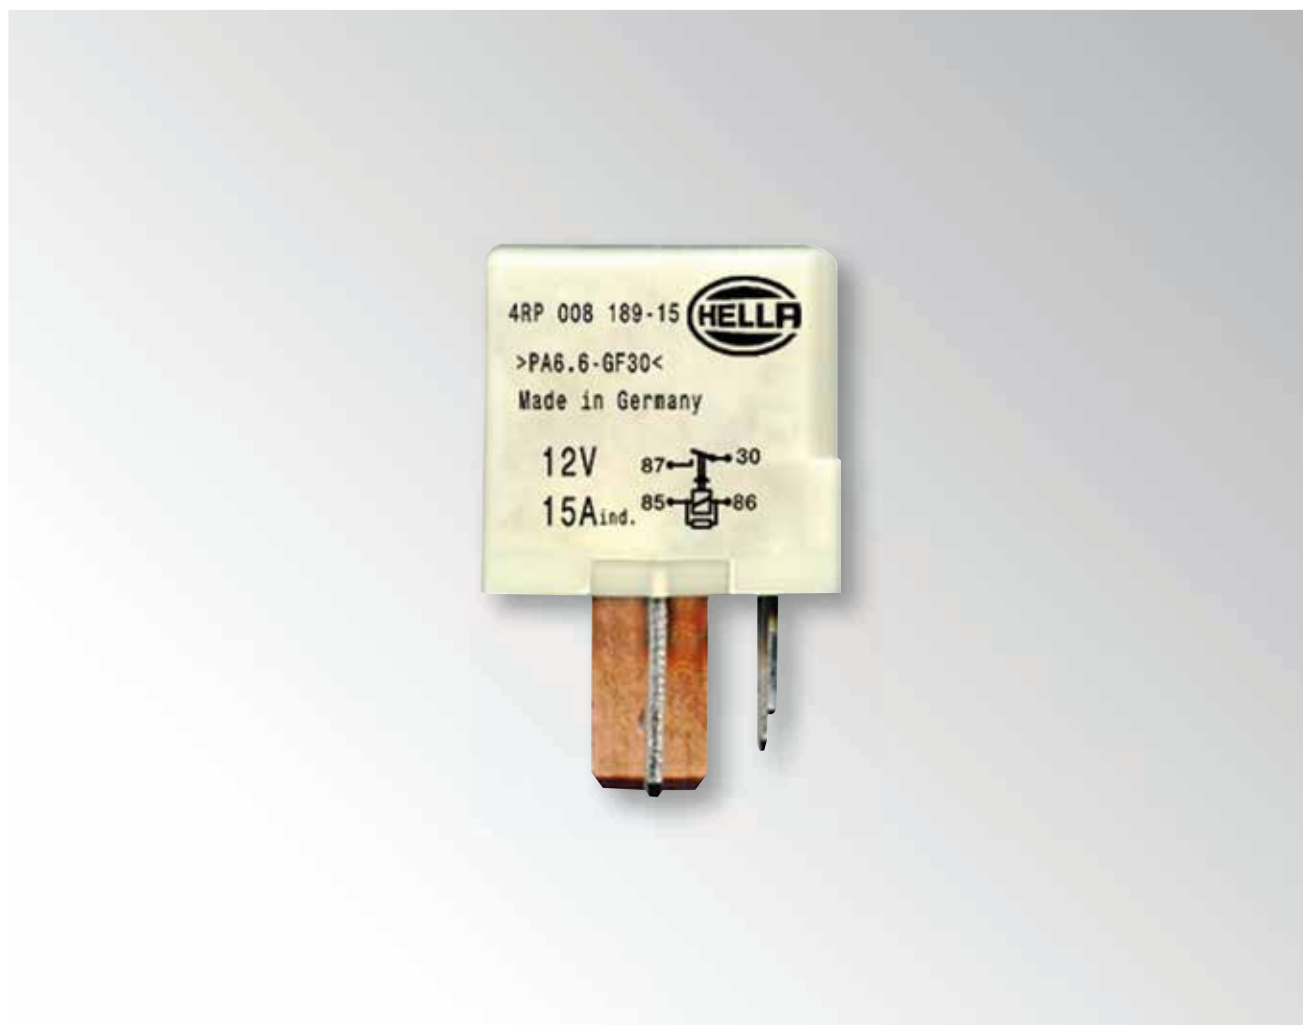


Functional principle

Fuel pump relays are mandatory safety units for any vehicle. They are equipped with a protection circuit, as the fuel pump does not have to pump fuel on the street in case of an accident or a damaged fuel pipe.


The vehicle's fuel pump is switched on via the relay when the engine is running. The electronic circuit of the relay checks if the engine is running. If the engine is suddenly stopped, eg. in the event of an accident, the relay will disconnect the power supply of the fuel pump in 1 – 2 seconds.

* At 80°C ambient temperature



Rated switching current*	Number of switching operations
max. 15 A	min. 50,000, max. 1,000,000
Coil resistance: 70 ohm, Parallel resistance: 560 ohm, Bracket: No	


Description	PU	Part number
12 V, 4-pole	1	4RP 008 189-151



Rated switching current*	Number of switching operations
max. 16 A	max. 6,500 ± 100

Duty time Output: 0.8 – 1.2 s, Voltage range: 9 to 18 V, Temperature range: -40 to +110°C, Bracket: No


Description	PU	Part number
12 V, 5-pole	1	4RP 008 189-061



Rated switching current*	Number of switching operations
max. 16 A	max. 7,100 ± 100

Duty time Output: 0.8 – 1.2 s, Voltage range: 9 to 18 V, Temperature range: -40 to +110°C, Bracket: No


Description	PU	Part number
12 V, 5-pole	1	4RP 008 189-081



Rated switching current*	Number of switching operations
max. 16 A	max. 6,700 ± 100

Duty time Output: 0.8 – 1.2 s, Voltage range: 9 to 18 V, Temperature range: -40 to +110°C, Bracket: No


Description	PU	Part number
12 V, 5-pole	1	4RP 008 189-091



Rated switching current*	Number of switching operations
max. 7.5 A	max. 200,000

Voltage range: 9 to 15 V, Temperature range: -40 to +110°C, Bracket: Yes


Description	PU	Part number
12 V, 6-pole	1	4RP 008 189-051



Rated switching current*	Number of switching operations
max. 16 A	max. 200,000

Duty time Output: max. 0.5 s, Voltage range: 9 to 18 V, Temperature range: -40 to +110°C, Bracket: Yes

Description	PU	Part number
12 V, 7-pole	1	4RP 008 189-041



Rated switching current*	Number of switching operations
max. 16 A	max. 200,000

Duty time Output: 0.1 – 0.5 s, Voltage range: 9 to 18 V, Temperature range: -40 to +110°C, Bracket: Yes

Description	PU	Part number
12 V, 7-pole	1	4RP 008 189-111

Product photo	Product Description	Available accessories	Part number
	1 DT connector each, 6-pin, DT „wedgeloek“ for plug, 6-pin, 7 contact sleeves 0.5 - 1.5 mm ² , 5 dummy plugs	DT connector, 6-pin: 8JA 201 022-062 DT „wedgeloek“ for plug, 6-pin: 9NB 201 024-062 Contact sleeve 0.5 – 1.5 mm ² : 8KW 201 025-112 Dummy plug 0.5 – 2 mm ² : 9NB 201 026-012	8JA 201 022-831
	1 DT connector each, 8-pin, Code „A“, DT „wedgeloek“ for plug, 8-pin, 9 contact sleeves 0.5 - 1.5 mm ² , 7 dummy plugs	DT connector, 8-pin, code „A“: 8JA 201 022-082 DT „wedgeloek“ for plug, 8-pin: 9NB 201 024-082 Contact sleeve 0.5 – 1.5 mm ² : 8KW 201 025-112 Dummy plug 0.5 – 2 mm ² : 9NB 201 026-012	8JA 201 022-841
	Female connector housing, 5-pole	Blade terminal sleeves: 8KW 744 819-003, 8KW 701 235-..., 8KW 744 820-003	8JA 715 606-001
	Female connector housing, 5-pole	Blade terminal sleeve: 8KW 719 874-007	8JA 717 291-007
	Female connector housing, 5-pole	Pin contacts already equipped	8JA 733 963-001
	Female connector housing, 5-pole	Blade terminal sleeves: 8KW 744 819-003, 8KW 701 235-..., 8KW 744 820-003, 8KW 733 815-003	8JD 733 767-001
	Female connector housing, 5-pole	Pin contacts already equipped	8JD 733 962-001

Product photo	Product Description	Available accessories	Part number
	Female connector housing, 5-pole	With pre-fitted cable assembly	8JD 745 801-001
	Female connector housing, 5-pole	Blade terminal sleeves: 8KW 863 904-003, 8KW 863 904-013	8JD 745 801-011
	Female connector housing, 9-pole	For mini-relays: SAE terminal arrangement for receiving five 6.3 mm and four 2.8 mm blade terminal connectors. Made of black plastic.	8JA 003 526-002
	Relay socket, 6-pin	Blade terminal sleeves: 8KW 744 819-003, 8KW 701 235-..., 8KW 744 820-003	9NH 701 230-001
	Cable sachet housing, 8-pin	Blade terminal sleeves: 8KW 744 819-003, 8KW 701 235-..., 8KW 744 820-003	8JD 008 151-061
	Cable sachet housing, 9-pin, mountable side by side	Blade terminal sleeves: 8KW 744 819-003, 8KW 701 235-..., 8KW 744 820-003	8JA 003 526-001
	Cable sachet housing, 9-pin, mountable side by side	Blade terminal sleeves: 8KW 744 819-003, 8KW 701 235-..., 8KW 744 820-003, 8KW 744 822-003	8JA 183 161-002



A series of horizontal lines for writing notes, spanning the width of the page.



HELLA GmbH & Co. KGaA

Rixbecker Straße 75
59552 Lippstadt, Germany
Tel.: +49 2941 38-0
Fax: +49 2941 38-7133
Internet: www.hella.com

HELLA Limited

Unit 6 Appletree Industrial Estate
Chipping Warden
Banbury, Oxon
OX17 1LL
England, UK
Tel.: (01295) 662400
Fax: 0800 7832571
E-mail: hella.sales@hella.com
Website: www.hella.co.uk

HELLA A/S

Lundsbjerg Industrivej 13
DK-6200 Aabenraa
Tel.: 0045 7330 3600
e-mail: info@hella.dk
www.hella.dk

© HELLA GmbH & Co. KGaA, Lippstadt
9Z2 999 140-977 J01445/GR/05.18/0.53
Printed in Germany
Subject to technical and price modifications.