

HELLA AUTOMOTIVE FILTERS OF043

Technical Installation Instructions



FORVIA




OIL FILTER OF043 – INSTALLATION INSTRUCTIONS

- OIL FILTER HOUSING




Guide rail

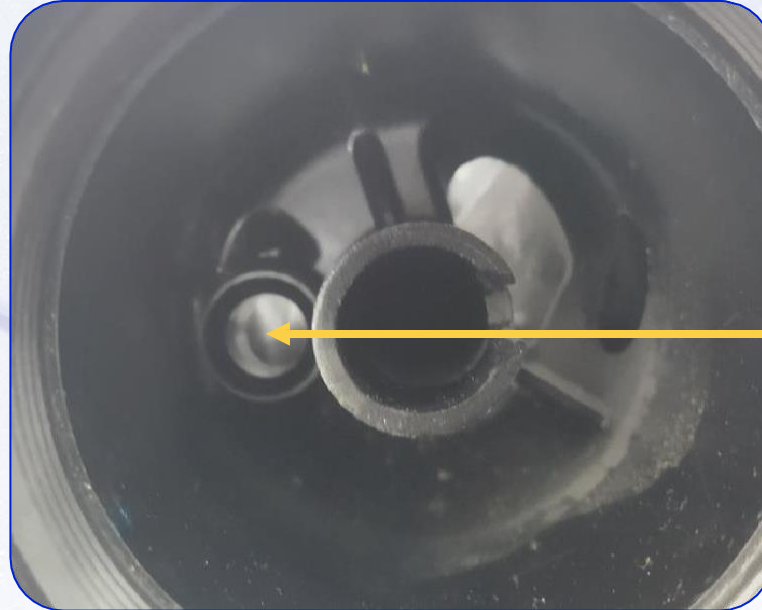

Locking element


OIL FILTER OF043 – INSTALLATION INSTRUCTIONS

- **HELLA BYPASS SYSTEM COMPONENTS** *(INCLUDED IN THE PACKAGE)*

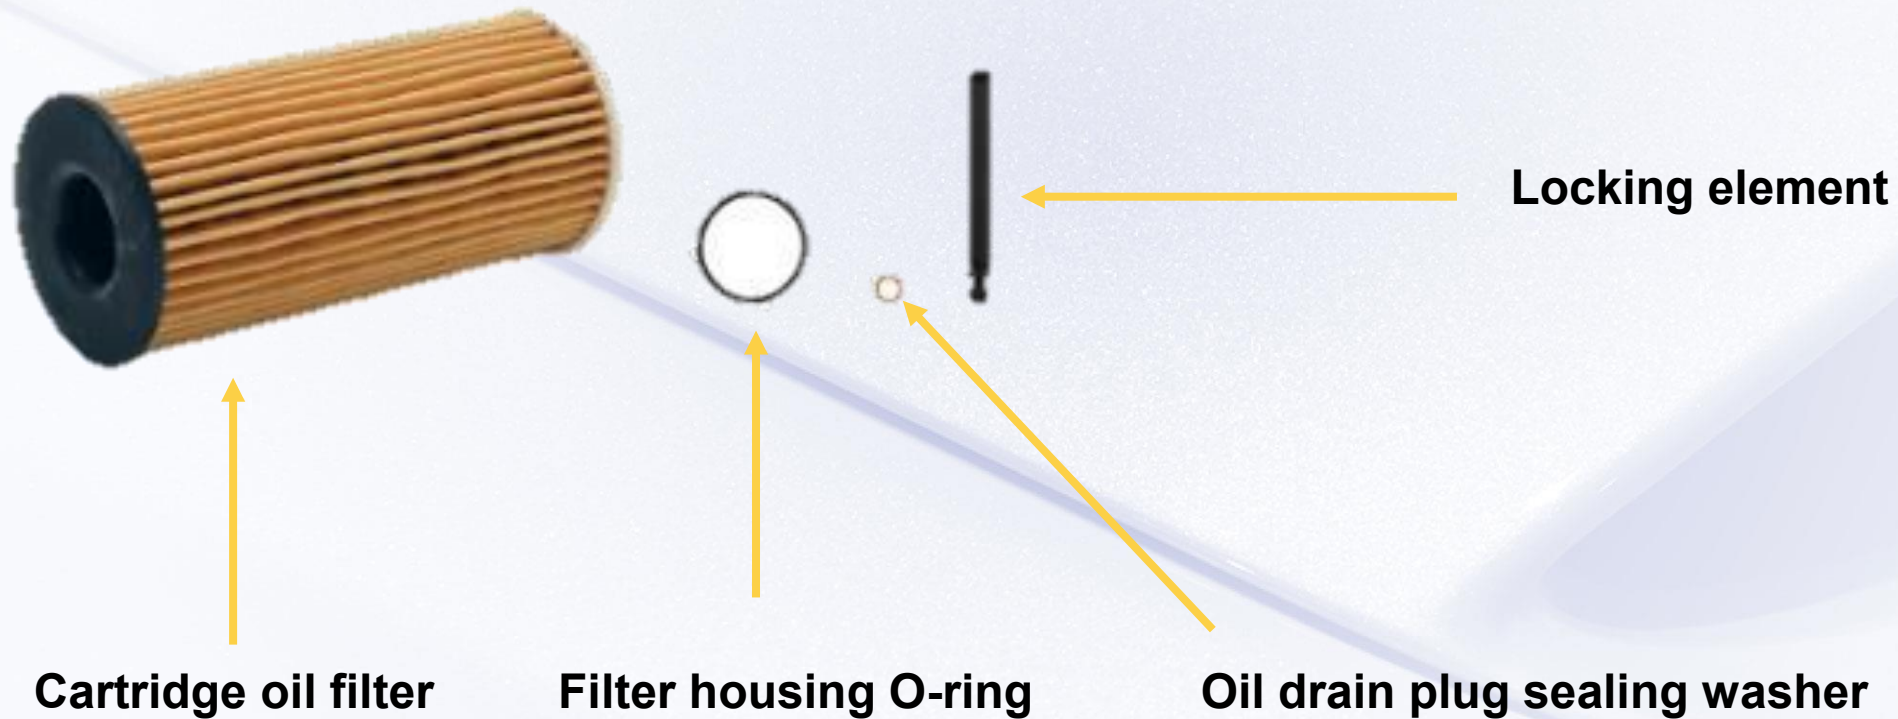

OIL FILTER OF043 – INSTALLATION INSTRUCTIONS


■ INSTALLATION INSTRUCTIONS

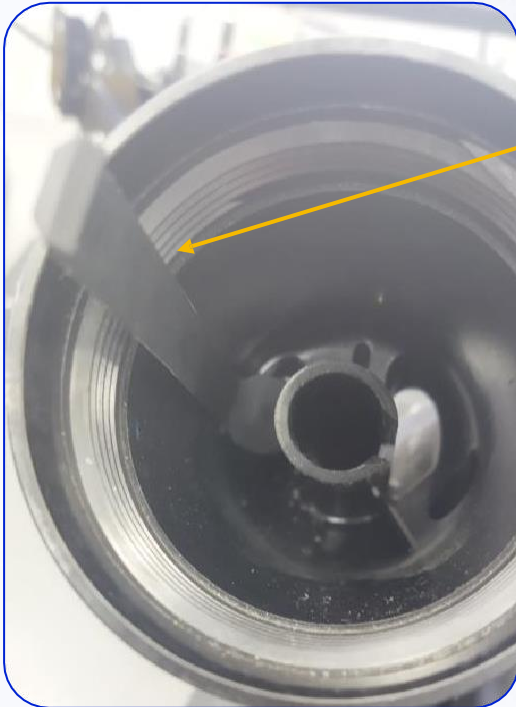

STEP 1

Install the locking element

- ◆ Insert the locking element into the designated mounting point inside the filter housing.
- ◆ Once inserted correctly, the locking element is securely positioned and ready for installation of the filter element.

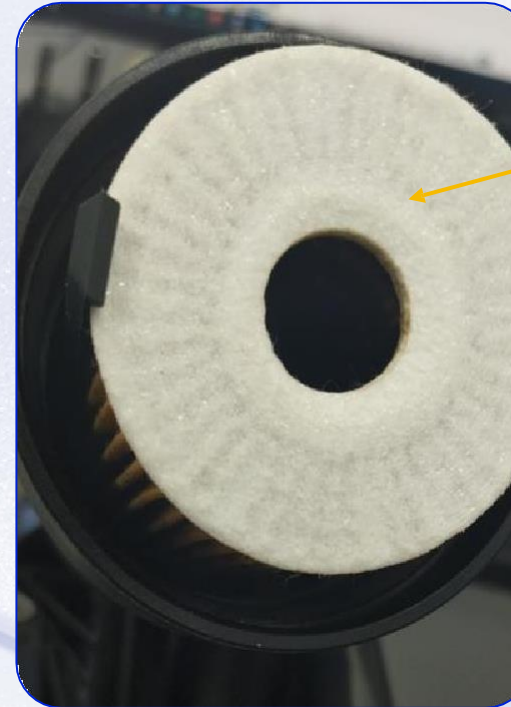

STEP 2

Install the cartridge filter

- ◆ Insert the cartridge filter into the housing, following the guide rail.
- ◆ The previously installed locking element ensures the filter is correctly positioned.

OIL FILTER OF043 – INSTALLATION INSTRUCTIONS

■ INSTALLATION INSTRUCTIONS

STEP 3

Install the sealing components

Before tightening the threaded filter cap, make sure to install the new O-ring supplied with the filter kit. This will:

-  Prevent oil leaks
-  Ensure a proper seal
-  Ensure correct system operation



... Finally, replace the oil drain plug sealing washer during the oil change.
(the drain plug itself is not included in the oil filter kit)

FORVIA

