

mega macs PC



Quick start guide

en

QSMMPCV5200EN0917S0
460 986-51 / 09.17

Table of Contents

1	About this Quick Start Guide	4
1.1	Reading the manual	4
2	Safety Precautions	5
2.1	Safety Precautions – Risk of Injury	5
2.2	Safety precautions for the PC VCI	6
3	Product description	7
3.1	Delivery Contents.....	7
3.2	Intended use	8
3.3	Using the Bluetooth Function	8
3.4	Connectors.....	9
4	Installation of the Hella Gutmann Drivers Package	11
4.1	System Requirements of Hella Gutmann Drivers	11
4.2	Installation of the Hella Gutmann Drivers Package	11
5	Contents of the mega macs PC software	12
5.1	Diagnostic Functions	12
5.2	Supporting Functions and Contents Depending on the License Type	12
6	Installation of the mega macs PC	13
6.1	Supported Operating Systems for the mega macs PC.....	13
6.2	System Requirements for the mega macs PC	13
6.3	Installing the mega macs PC software	13
7	Putting the mega macs PC into Operation.....	15

7.1	Connection to the PC VCI.....	15
7.2	Executing the mega macs PC software	15
7.3	License Release.....	16
8	Working with the mega macs PC.....	18
8.1	Icons.....	18
8.2	Diagnostics	22

1 About this Quick Start Guide




The quick start guide comprises the most important information in a clearly visible form to facilitate the start with the mega macs PC.

1.1 Reading the manual




You can find the manual with detailed information about the use of your mega macs PC in the device under ? or on the homepage of Hella Gutmann www.hella-gutmann.com/de/workshop-solutions/diagnose. This page provides the current download versions of the manuals and quick start guides as well as other valuable product leaflets for optional accessories and products of Hella Gutmann, which can support you in your daily work.

2 Safety Precautions

2.1 Safety Precautions – Risk of Injury







  	<p>When working on the vehicle, there is a risk of injury through rotating parts or rolling of the vehicle. Therefore observe the following:</p> <ul style="list-style-type: none">• Protect vehicle against rolling away.• Additionally place gear selector lever of AT vehicles to park position.• Deactivate the start/stop system to avoid an inadvertent engine start.• Connect the PC VCI to the vehicle only with engine shut down.• Do not reach into rotating components when engine is running.• Do not run cables near rotating parts.• Check the high-voltage parts for damage.
---	---

2.2 Safety precautions for the PC VCI

  	<p>To prevent incorrect handling and consequent injuries to the user or damage to the PC VCI, observe the following:</p> <ul style="list-style-type: none">• Protect the PC VCI and the connecting cables from hot parts.• Protect the PC VCI and the connecting cables from rotating parts.• Regularly check connecting cables/accessory parts for damage (destruction of the PC VCI due to short circuit).• Connect the PC VCI exclusively according to user manual.• Protect the PC VCI from fluids such as water, oil or gasoline. The PC VCI is not watertight.• Protect the PC VCI from strong impacts and do not drop it.• Do not open the PC VCI on your own. Only technicians authorized by Hella Gutmann are allowed to open the PC VCI. Warranty and guarantee will be rendered void at any case of unauthorized tampering of the device or if the protective seal is damaged.• If the PC VCI is not working properly, contact Hella Gutmann or a Hella Gutmann trading partner without delay.
---	--

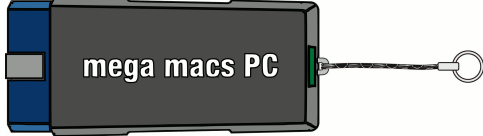3 Product description

3.1 Delivery Contents

Quantity	Designation	
1	PC VCI	
1	Pen drive for installing the mega macs PC software	
1	Bluetooth adapter	
1	USB cable for connecting the PC VCI to the PC	
1	OBD cable extension 0.3 m (optional)	
1	HGS data carrier	
1	Quick start guide	

3.1.1 Checking delivery contents


Please check the delivery contents upon receiving your device so that complaints can be issued immediately regarding any potential damage.

Proceed as follows to check the delivery contents:

1. Open the package supplied and check for completeness based on the delivery slip.

Should you identify any damage to the package, then open the package in the presence of the delivery service and check the PC VCI for hidden damage. Any transport damage to the package supplied and damage to the PC VCI shall be registered in a damage report by the delivery service.

2. Take the PC VCI out of the packaging.

	<p>CAUTION</p> <p>Danger of short circuit due to loose parts in or on the PC VCI</p> <p>Danger of destruction of the PC VCI and/or the automotive electronics</p> <p>Never put the PC VCI into operation if you suspect that there are loose parts in or at the module. Please contact the Hella Gutmann repair service or a Hella Gutmann trading partner immediately in this case.</p>
---	---

3. Check the PC VCI for mechanical damage and shake it lightly to ensure that there are no loose parts inside.

3.2 Intended use

The mega macs PC software and the PC VCI form a system which is used for detecting and rectifying faults in automotive electronic systems.

It uses a diagnostic interface to establish a connection to the automotive electronics and to provide access to descriptions of the vehicle system. A lot of this data is transferred to the PC directly via an Internet connection from the Hella Gutmann diagnostic database. Therefore, the PC should be permanently online.

The mega macs PC software is not suitable for repairing electrical machines and tools or home electrics. Diagnostic devices from other manufacturers will not be supported.

If the mega macs PC software and the PC VCI is used in a way not authorized by Hella Gutmann the protection of the device may be influenced.


The PC VCI is intended for industrial use. Outside of industrial environments, e.g. in commercial areas or in the centre of a town, radio interference suppression measures may need to be taken.

3.3 Using the Bluetooth Function

The terms of use of the Bluetooth function may be restricted or prohibited through law or corresponding legal regulations in certain countries.

Pay attention to the provisions in force in the respective country before using the Bluetooth function.

3.4 Connectors

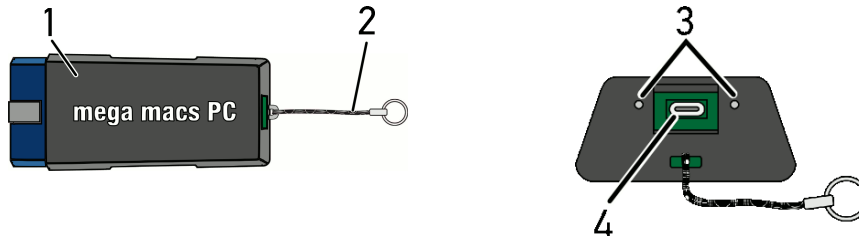

	Designation
1	PC VCI for diagnostic port in the vehicle
2	Retaining strap for mounting e.g. a lanyard
3	Green and blue indicator lamp (LED) The indicator lamps show the operating status of the PC VCI.
4	Micro USB interface for USB cable to USB interface of the PC

3.4.1 Meaning of the Flashing Frequencies

Status display		Meaning
Blue LED	Green LED	
LED switched off.	LED switched off.	<ul style="list-style-type: none"> Software inactive/ defective. No voltage present. PC VCI defective.
LED flashes quickly (1x per sec.).	LED switched off.	<ul style="list-style-type: none"> Update failed. Update invalid. PC VCI defective.

Connectors

Status display		Meaning
Blue LED	Green LED	
LED flashes slowly (every 3 sec.).	LED switched off.	<ul style="list-style-type: none">• Update failed.• Update invalid.• PC VCI defective.
LED flashes slowly (every 3 sec.).	LED permanently on with regular brief interruptions.	PC VCI ready for operation.

4 Installation of the Hella Gutmann Drivers Package

4.1 System Requirements of Hella Gutmann Drivers

- Microsoft Windows 7 or higher
- Windows administrator rights

4.2 Installation of the Hella Gutmann Drivers Package

To obtain all the data about the related vehicle provided by Hella Gutmann, the device requires a permanent online connection and the installed driver package Hella Gutmann Drivers. To keep the connection costs down, Hella Gutmann recommends a DSL connection and a flat rate.

1. Install the Hella Gutmann Drivers on the office or repair shop PC.

The driver package Hella Gutmann Drivers program is on the supplied HGS data carrier.

2. Connect the device to a web-compatible PC.

Once the connection symbol in the top symbol bar changes from black to green, the online connection has been set up successfully and is active.

5 Contents of the mega macs PC software

5.1 Diagnostic Functions

- Reading/deleting trouble codes
- Parameter readout
- Actuator test
- Service reset
- Basic setting
- Coding
- Test function

5.2 Supporting Functions and Contents Depending on the License Type

- Vehicle information, e.g.:
 - Timing belt data
 - Service data
 - Recall campaigns
- 2 updates per year, e.g.:
 - Diversification of the existing functions by new vehicle models

6 Installation of the mega macs PC

6.1 Supported Operating Systems for the mega macs PC

- Microsoft Windows Vista
- Microsoft Windows 7/8

6.2 System Requirements for the mega macs PC

- At least 512 MB free internal memory
- at least 2 GB free hard disc space
- At least 1 free USB port on the PC
- Screen resolution at least 800 x 600

6.3 Installing the mega macs PC software

An installation wizard guides you through the necessary installation steps.

Proceed as follows to install the mega macs PC software:

1. Switch on the PC.
2. Insert the supplied pen drive (2) into the USB port on the PC.
The **mega macs PC** USB drive opens automatically.
3. Click **>Open folder<** and start the file **mega_macs_pc.exe**.
 - You can also open the USB drive as follows: **Start > My Computer > mega macs PC**.

The **mega macs PC Setup** window appears.

4. Select the required language and click **>OK<**.

The selection will be saved automatically.

5. Click **>Next<**.

A drop-down list appears.

A target directory for the mega macs PC software files is already suggested. If you wish to have another target directory, you can use the **>Search<** function to select a suitable directory. At the end of installation, the files will be copied into the selected target directory.

6. Click **>Next<**.
-

7. Click **>Install<**.

Installation will be started.

8. Wait until the installation is finished.

9. Click **>Finish<**.

A link to the mega macs PC is automatically created on the desktop.


10. Disconnect the pen drive.

Installation of the mega macs PC software is complete now.

7 Putting the mega macs PC into Operation


This section gives a description of how to switch on and off the mega macs PC software as well as all the necessary steps for the first use of the mega macs PC software.


7.1 Connection to the PC VCI

	NOTICE The PC VCI must always be connected via Bluetooth to the PC on which the mega macs PC software is used.
---	--

The PC VCI is a regular feature of the mega macs PC software. The PC VCI contains software components. Various functions of the mega macs PC software therefore require a connection to the PC VCI.

7.2 Executing the mega macs PC software

	NOTICE During initial start-up and after every software update, the software user needs to confirm the general terms and conditions (GTC) of Hella Gutmann Solutions GmbH. Otherwise, certain device functions will be unavailable.
---	---

	NOTICE When starting the device for the first time, you must couple the mega macs PC software with the PC VCI. This requires the mega macs PC software to be connected to the PC VCI via USB cable. A Bluetooth connection is sufficient when starting up in the future.
---	--

Proceed as follows to execute the mega macs PC software:

1. Insert the USB cable into the USB port on the PC and the PC VCI.

2. Go to **Start > All programs > Hella Gutmann Solutions > mega macs PC** and select **> mega macs PC**.

The mega macs PC software can also be executed as follows:

- Windows 8: Select **mega macs PC** on the start screen.
- Windows 7 and lower: Select the mega macs PC shortcut on the desktop.

The mega macs PC software will be started.

The general terms and conditions appear.

3. Read the general terms and conditions and confirm them at the end of the text.

A user selection window appears.

The user name is saved for all data stored in the Car History. This enables quicker identification of the mechanic who performed the repair work if a query is subsequently made.

4. Double-click ✕.
5. Enter the user name.
6. Confirm your entry with ✓.
7. Activate the **Stay logged in** check box if necessary.

If the **Stay logged in** check box is activated, you will not need to select a user name when switching on in the future.

8. Confirm your entry with ✓.

The input is saved automatically.

9. Disconnect the USB cable from the PC VCI and PC.

10. Insert the Bluetooth adapter into the USB port on the PC.

If the PC recognised the Bluetooth adapter the LED becomes blue.

The main menu appears.

Now you can work with the mega macs PC software.

7.3 License Release



NOTICE

In order to use the full scope of the purchased licenses you need to connect the mega macs PC software to the HGS server prior to the first start-up.

Proceed as follows to connect the mega macs PC software with the HGS server:

1. Select **Contracts** under **> Settings** in the main menu.
2. Select the **>License<** tab.
3. Retrieve **My licences** with .

Data is downloaded. Purchased licences are displayed.










4. Restart the mega macs PC software.







Now you can start working with the mega macs PC software.

8 Working with the mega macs PC




8.1 Icons

8.1.1 General Symbols





Icons	Designation
	Switch off Exit the mega macs PC software.
	Enter Call up the selected menu.
	Confirm Perform functions such as the following: <ul style="list-style-type: none"> • Start the selected function. • Confirm the present entry. • Confirm your menu selection.
	Cancel Cancel functions such as the following: <ul style="list-style-type: none"> • Active function • Input
	Start Start a function or procedure.
	Delete Delete data or entries.
	Arrow keys Navigate with the cursor in menus or functions.
	Printing Print the current window.
	Help Open the user manual and explanations on the individual menus or functions.

Icons	Designation
	Virtual keypad Open the virtual keypad for text input.
	Drop-down list Open a selection window.
	Select all Select all available elements.
	Unselect all Unselect all available elements.
	Zoom in Zoom in the present view.
	Zoom out Zoom out of the present view.









8.1.2 Symbols in the Main Menu




Icons	Designation
	Home Return to the main menu.
	Vehicle selection Select a vehicle or access the Car History. First select a vehicle to access the following functions depending on the vehicle: <ul style="list-style-type: none"> • Diagnostics • Vehicle information
	Diagnostics Here you will find vehicle-specific ECU diagnostics, e. g.: <ul style="list-style-type: none"> • Trouble code reading • Parameter readout • Coding

Icons

Icons	Designation
	<p>Vehicle information Here you will find information regarding the selected vehicle e.g.:</p> <ul style="list-style-type: none"> • Assistance in finding the installation location of a component • Timing belt and service data • Technical data • Wiring diagrams • Recall campaigns of vehicle manufacturers and importers
	<p>Applications Useful applications are stored here:</p> <ul style="list-style-type: none"> • Calculator • Conversions
	<p>Optional HGS tools Functions for linked accessory tools are stored here, e.g. for battery diagnostics.</p>
	<p>Settings Configure the mega macs PC software here.</p>

8.1.3 Symbols in the Vehicle Selection Menu

Icons	Designation
	<p>Preselect the vehicle Pre-filter the database for the vehicle type:</p> <ul style="list-style-type: none"> • Passenger cars • Motorcycles • Lorries
	<p>Vehicle database Select a vehicle from the database, e.g. according to the following criteria:</p> <ul style="list-style-type: none"> • Manufacturer • Type • Year of manufacture • Engine code
	<p>Car History Call up the Car History.</p>
	<p>Display Car History files Call up a list of saved diagnostic data records on a certain vehicle.</p>
	<p>VIN identification Read out the VIN of the vehicle using the PC VCI.</p>
	<p>OBD diagnostics Here you can only start the OBD diagnostics by selecting the vehicle manufacturer and the fuel type.</p>
	<p>Page forward Go one page forward.</p>
	<p>Page back Go one page back.</p>

Icons	Designation
	<p>information Call up additional information regarding the selected vehicle e.g.:</p> <ul style="list-style-type: none"> • Vehicle type • Engine displacement • Output • Engine code
	<p>Update the Car History Update the list of vehicles in the Car History and update the status of the vehicles.</p>
	<p>Vehicle search in the vehicle database Search for a vehicle in the vehicle database using its VIN, its manufacturer key no. or its license plate number.</p>

8.2 Diagnostics

8.2.1 Preparing Vehicle Diagnostics


The selection of the correct vehicle is a basic precondition for trouble-free vehicle diagnostics. The mega macs PC software provides assistance to simplify the selection, e.g. indicating the installation position of the diagnostic connector or vehicle identification by VIN.

The following ECU functions are possible under **>Diagnostics<** in the main menu:

- Trouble code reading
- Parameter readout
- Actuator test
- Service reset
- Basic setting
- Coding
- Test function

Proceed as follows to prepare vehicle diagnostics:

1. Insert the Bluetooth adapter into the USB port on the PC.

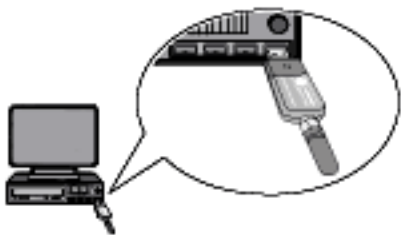

2. Start the mega macs PC software.
3. Select the desired vehicle under **>Vehicle selection<** in the main menu.
4. Select **>Diagnostics<** in the main menu.

**CAUTION**

Pulling off of the PC VCI when actuating the clutch

Risk of injury or material damages

Proceed as follows before startup:

1. Apply the parking brake.
2. No gear is engaged.
3. Regard the window with information and instructions.


**NOTICE**

Danger of short circuit and voltage peaks when connecting the PC VCI

Danger of destruction of automotive electronics

Switch off ignition before connecting the PC VCI to the vehicle.

5. Insert the PC VCI into the vehicle's diagnostic port.

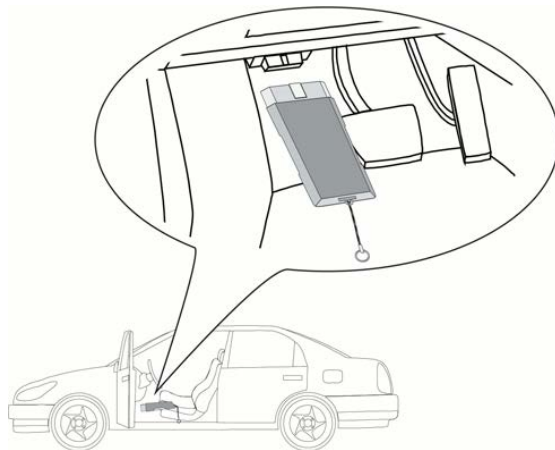

Both LEDs of the PC VCI flash. The PC VCI is ready for operation.

6. Select **>Diagnostics<** in the main menu.

Now you can select the type of diagnostics.

8.2.2 Performing Diagnostics

Proceed as follows to perform diagnostics:

1. Perform steps 1 to 5 as described in section **Preparing vehicle diagnostics (Page 22)**.
2. Use ∇ to select the desired diagnostics under **Function, Assembly** and **System**.
3. Observe the information window, note window and instruction window as applicable.
4. Start the communication with \square .

The diagnostic procedure between the mega macs PC software and the PC VCI is realized with Bluetooth.


Connection to the PC VCI is established if the 📶 symbol changes from black to green.

5. Repair the vehicle. Then delete the saved trouble codes from the vehicle system.

8.2.3 Calling Up Vehicle Information

Here you have an overview of the vehicle information including the following:

- Car History
- Component Help
- Service data

	NOTICE You require an online connection if you wish to access all available information.
---	--

Proceed as follows to call up vehicle information:

1. Select **>Vehicle information<** in the main menu.
2. Select the desired type of information using the symbols.

Certain types of information may not be available depending on the selected vehicle.

HELLA GUTMANN SOLUTIONS GMBH

Am Krebsbach 2

79241 Ihringen

GERMANY

Phone: +49 7668 9900-0

Fax: +49 7668 9900-3999

info@hella-gutmann.com

www.hella-gutmann.com

© 2017 HELLA GUTMANN SOLUTIONS GMBH

1 STUECK/PIECE(S)



9XQ 460 986-511

Made in Germany