


Rotativo Rota LED | HELLA



Long service life

Instrucciones de montaje

Installation information

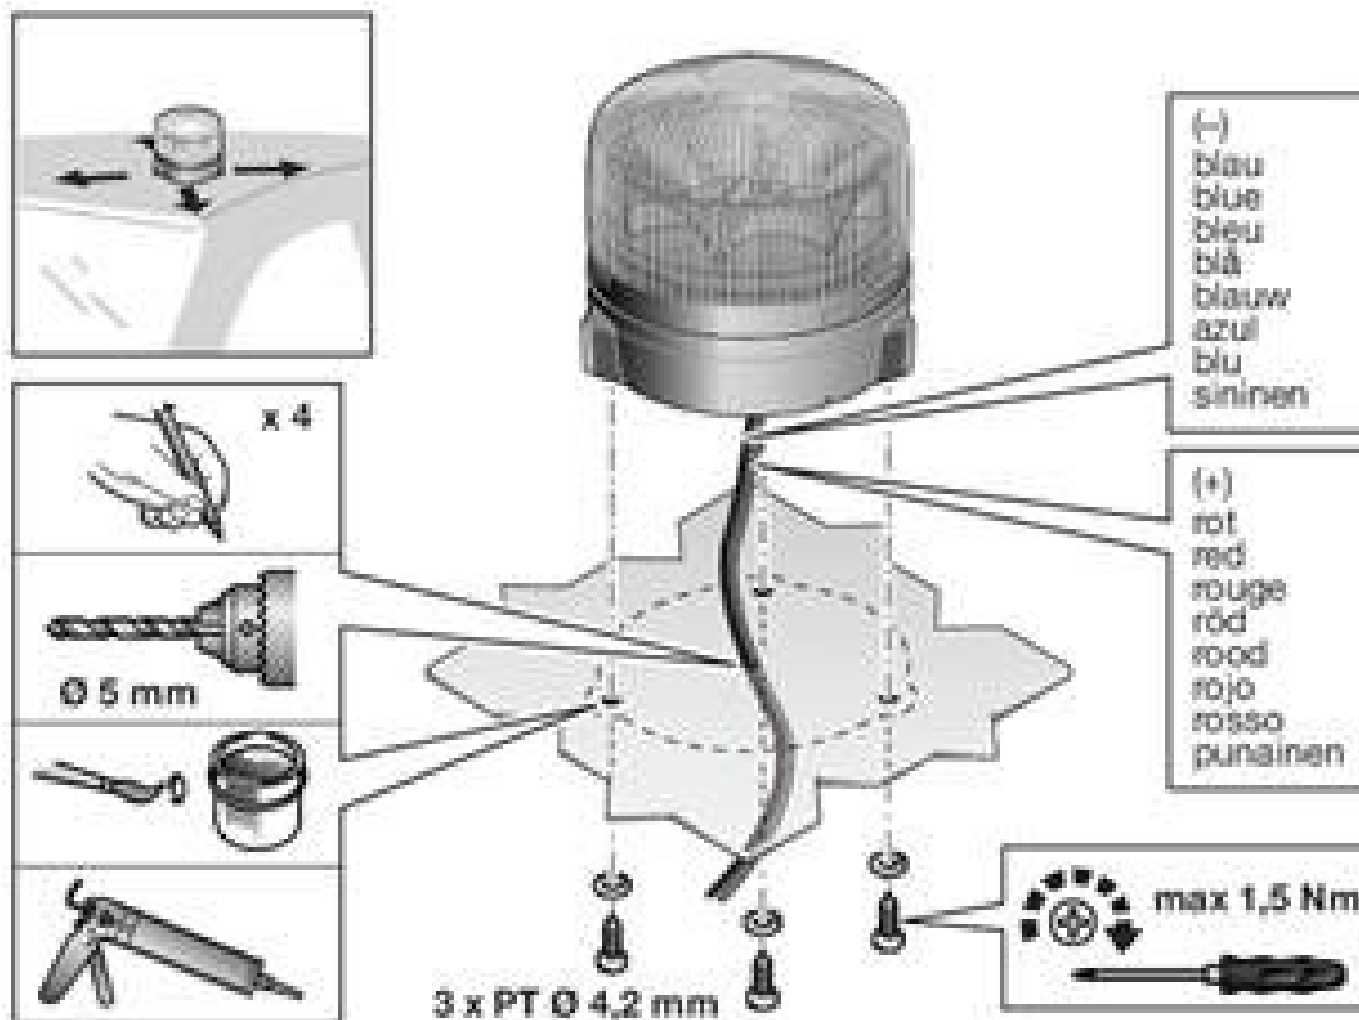






hay que tener en cuenta que la boquilla de paso



max. 120 km/h



CLEANER

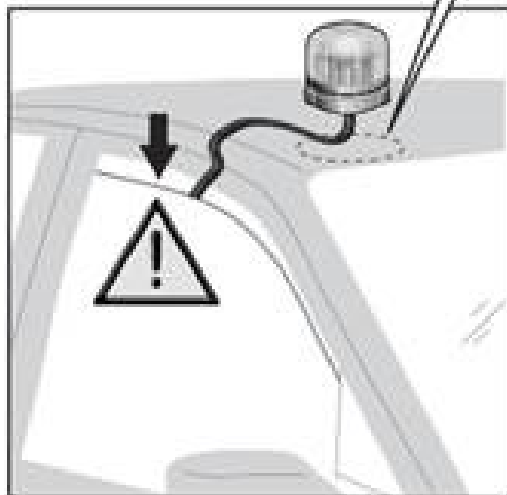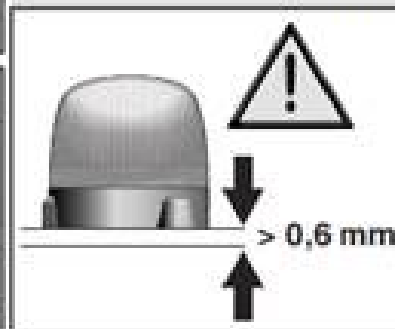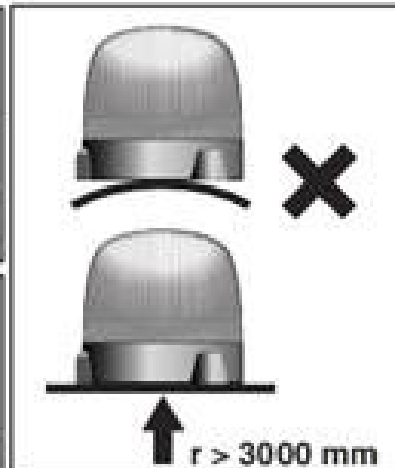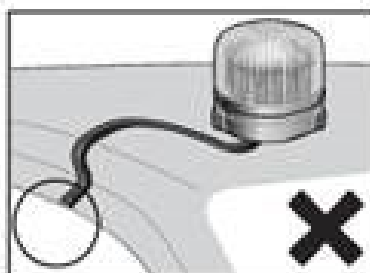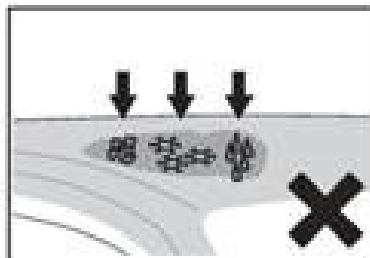


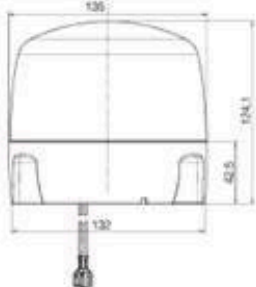
puede emplearse p.ej., una boquilla de goma apropiada o masa selladora de carrocería.

<i>Technical specifications</i>	
Type approval	Format: TA1 E1 003109
Nominal voltage	12V/24V
Operating voltage	9-36V
Total current draw	12 V: approx. 0.7 A 24 V: approx. 0.4 A
Interference suppression class	VDE 00879, interference suppression class 3
Power consumption	12 V: approx. 8W 24 V: approx. 10W
Dome	PC
Usage position	standing
Protection class	IP5KX, IPX4K, IPX9K
Temperature range	-40°C to +60°C
Reverse polarity protection	yes
Body	EPDM
Interference suppression class	e1 approval acc. to 72/245 EEC as amended by 2006/28 EC

Attention:

Información técnica

Datos técnicos

			Rota LED F 2XD 010 979-001
			Rota LED FL 2XD 010 979-011
			Rota LED M 2XD 010 979-021

Important safety notice

The following technical information and tips for practical use have been set up by HELLA in order to offer professional support to automotive workshops in their daily work. The information available here on this website is only to be used by appropriately trained specialist staff.

The reprinting, distribution, reproduction, exploitation in any form and disclosure of the contents of this document, even in part, is prohibited without our express written approval and indication of the source. The schematic illustrations, figures and descriptions are for explanation and presentation of the document text and cannot be used as a basis for installation or design. All rights reserved.