

Lampeggiante Rota LED | HELLA


Caratteristiche del prodotto



Il lampeggiante non è dotato di parti in movimento come specchio rotante ecc. Pertanto non è soggetto a usura e offre la massima affidabilità.

Istruzioni di montaggio






Installation information

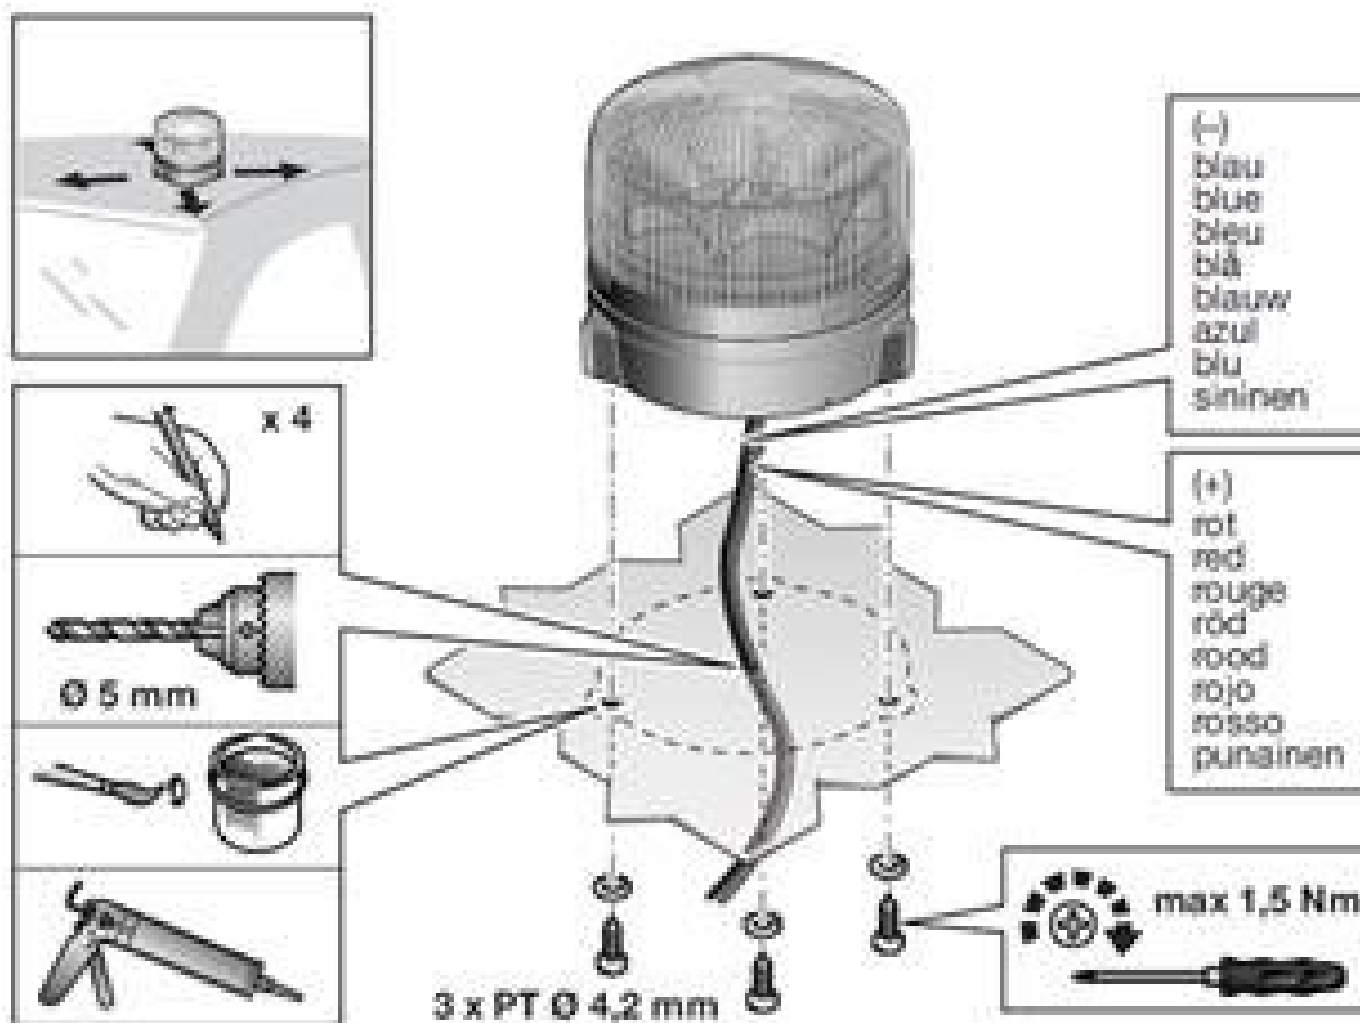

Verificare che il passaggio dei cavi verso l'abitacolo sia a tenuta.



max. 120 km/h

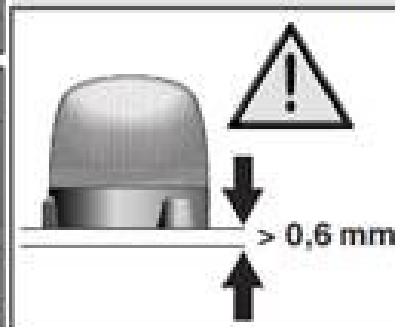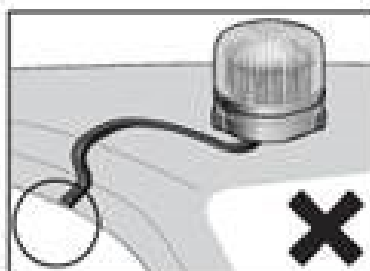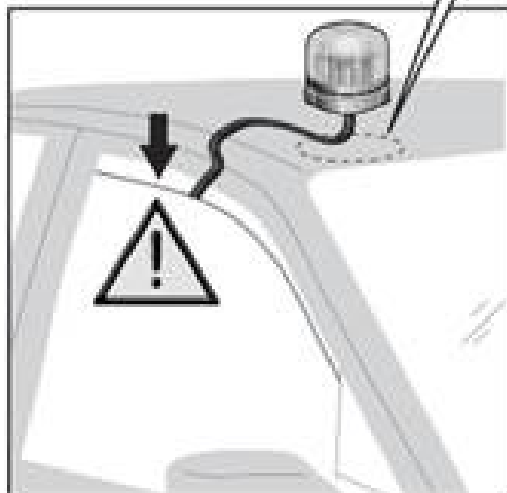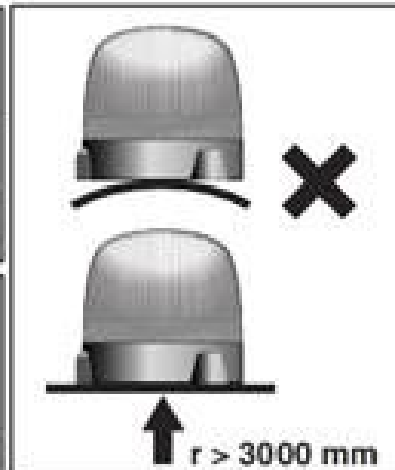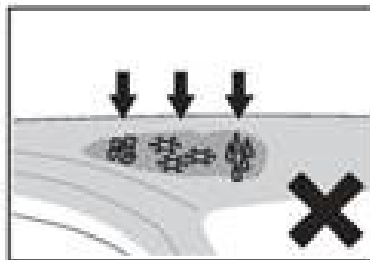




Quando si utilizza la versione magnetica si devono osservare alcuni punti: vedere figura.

<i>Technical specifications</i>	
Type approval	Format: TA1 E1 003109
Nominal voltage	12V/24V
Operating voltage	9-36V
Total current draw	12 V: approx. 0.7 A 24 V: approx. 0.4 A
Interference suppression class	VDE 00879, interference suppression class 3
Power consumption	12 V: approx. 8W 24 V: approx. 10W
Dome	PC
Usage position	standing
Protection class	IP5KX, IPX4K, IPX9K
Temperature range	-40°C to +60°C
Reverse polarity protection	yes
Body	EPDM
Interference suppression class	e1 approval acc. to 72/245 EEC as amended by 2006/28 EC

Attenzione:

Il lampeggiante deve essere protetto con

un fusibile da 5 A!

			Rota LED F 2XD 010 979-001
			Rota LED FL 2XD 010 979-011
			Rota LED M 2XD 010 979-021

Important safety notice

The following technical information and tips for practical use have been set up by HELLA in order to offer professional support to automotive workshops in their daily work. The information available here on this website is only to be used by appropriately trained specialist staff.

The reprinting, distribution, reproduction, exploitation in any form and disclosure of the contents of this document, even in part, is prohibited without our express written approval and indication of the source. The schematic illustrations, figures and descriptions are for explanation and presentation of the document text and cannot be used as a basis for installation or design. All rights reserved.