

Volvo V60 - Replacement of direction indicator bulbs | HELLA

Volvo

Volvo V60

Model year: 2010 - 2013

Replacement of direction indicator bulbs

In order to replace the front direction indicator bulbs in this car, the headlamp/s has/have to be dismantled.

Figure 1 shows the front view of a Volvo V60.



Fig.1

So as to release the headlamp from the engine compartment, pull out the locking pins (Fig.2) upwards and carefully pull the headlamp forwards out of the body (Fig.3).

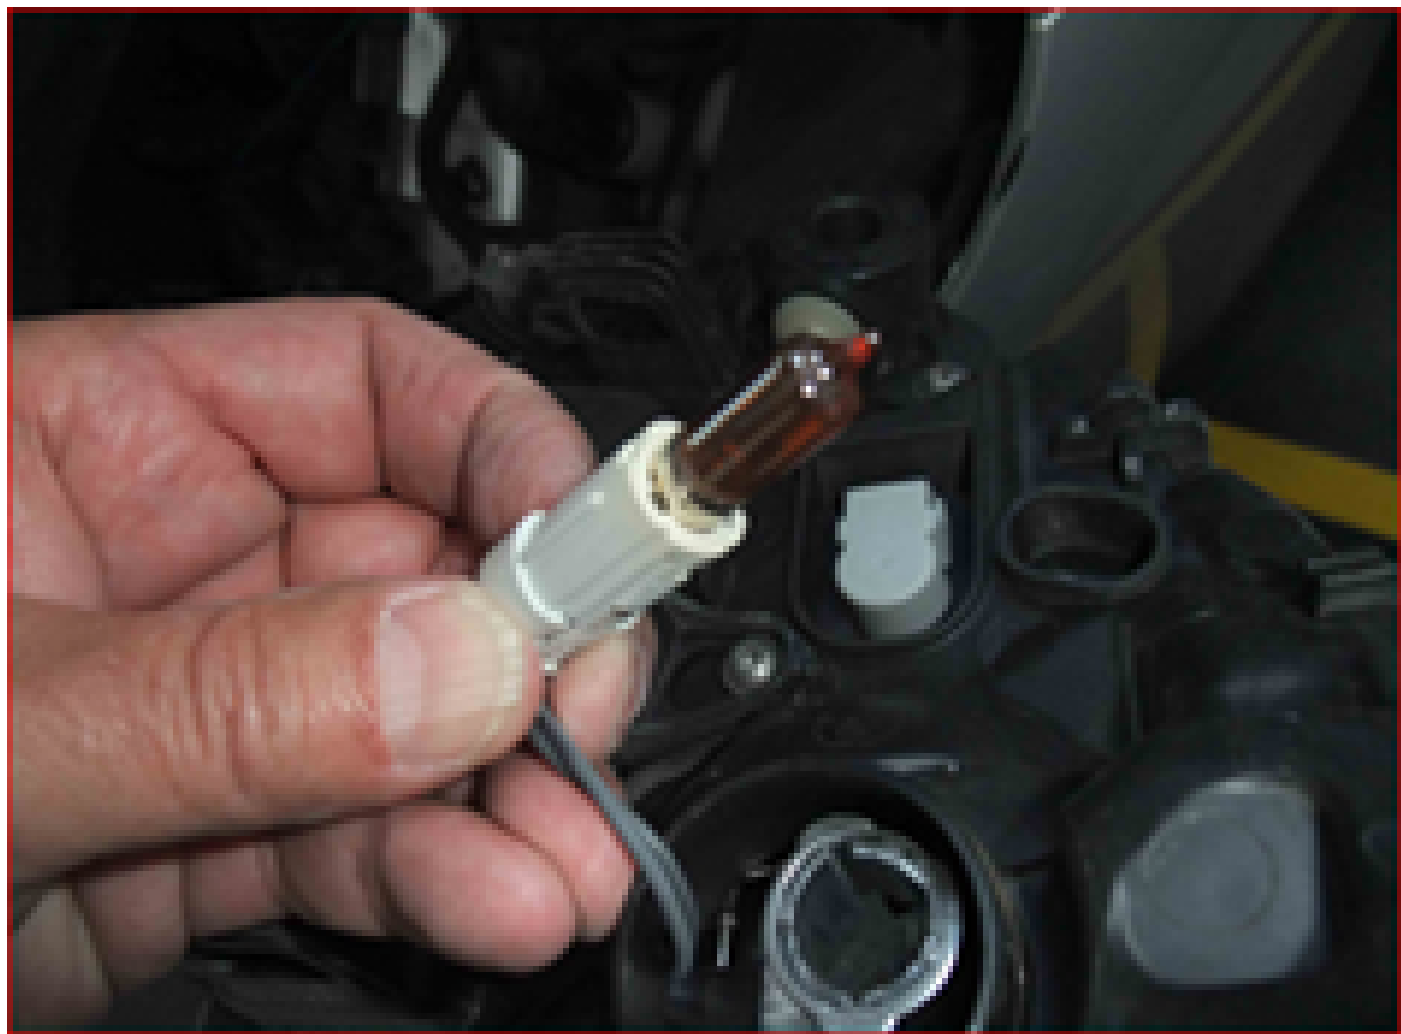




Fig. 2

Fig. 3

Remove the cover/protective cap of the direction indicator bulb on the rear of the headlamp and pull out the bulb holder (Fig.4). Then replace the HY21W bulb (Fig.5), push it gently into the bulb holder while turning the bulb at the same time.



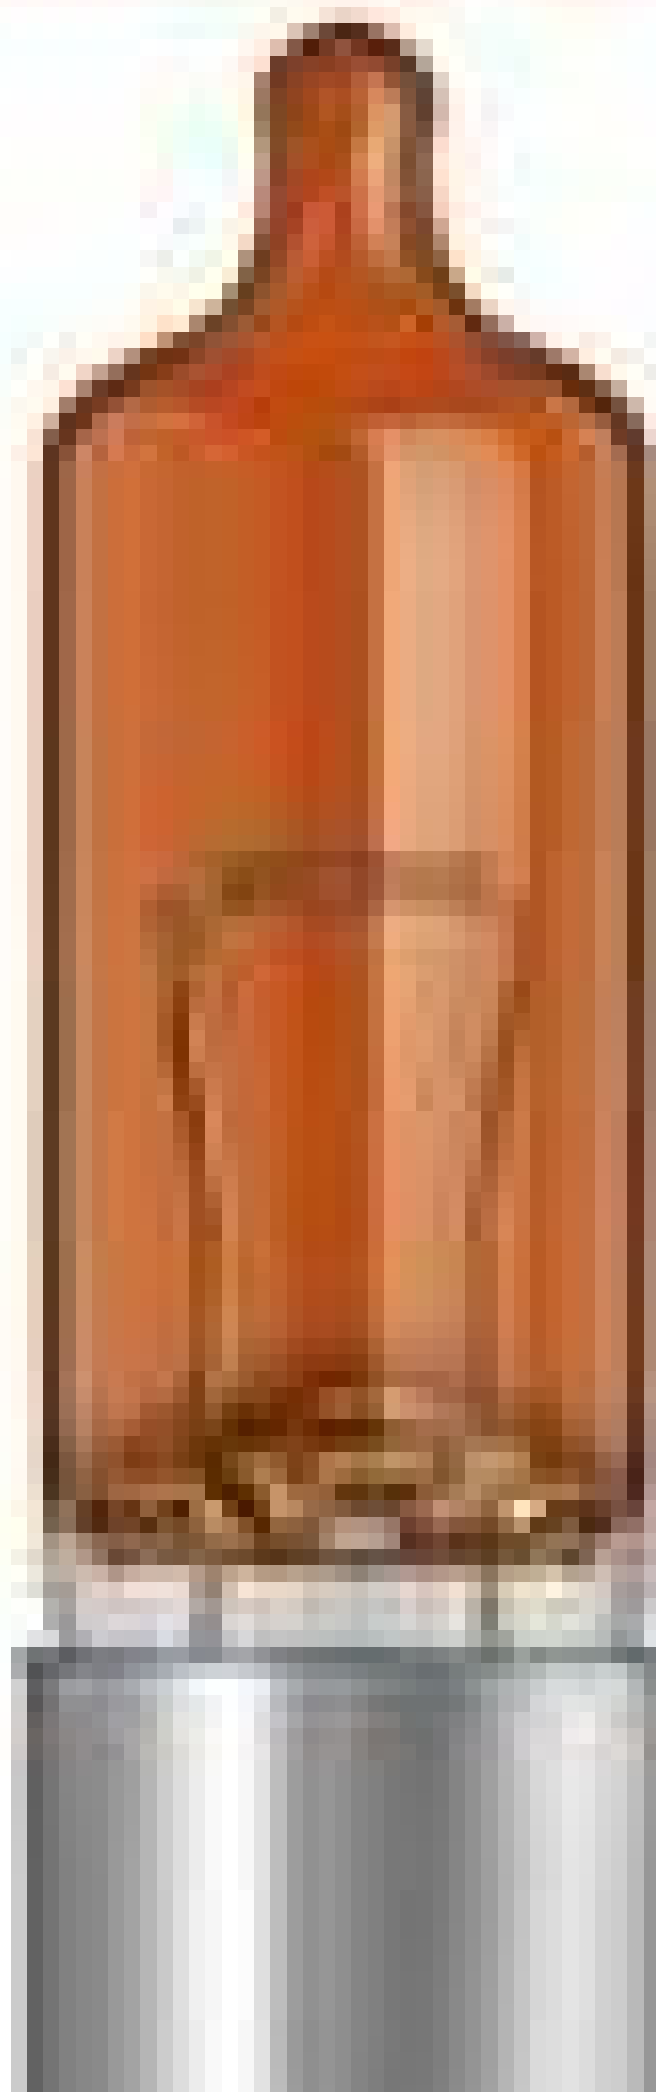


Fig. 4

Fig. 5

Then remount the parts in reverse order.

Carry out functional test and check beam setting, adjusting to correct setting wherever necessary.

Important:

- Before replacing the bulb, disconnect the systems from the power supply; switch off the ignition and remove the remote control key.
- When replacing the bulb, do not touch the glass of the bulbs with your fingers.

Caution:

Xenon headlights - high voltage.

Observe instructions for use and safety information.

Important safety notice

The following technical information and tips for practical use have been set up by HELLA in order to offer professional support to automotive workshops in their daily work. The information available here on this website is only to be used by appropriately trained specialist staff.



The reprinting, distribution, reproduction, exploitation in any form and disclosure of the contents of this document, even in part, is prohibited without our express written approval and indication of the source. The schematic illustrations, figures and descriptions are for explanation and presentation of the document text and cannot be used as a basis for installation or design. All rights reserved.