


Description	EnerPAX® LED Power Supplies Compact double insulated DC converters, specifically designed for Courtesy/Interior LED lamps featuring short-circuit switch-off with automatic restart. Units operate off standard 240V AC input voltage and provide voltage outputs of 12V and 24V DC respectively, to operate LED lamps of up to 10W or 25W power consumption. Mains output power reduction provides protection against overheating and overload.	
Input Voltage	200 - 250V AC	
Frequency	50/60 Hz	
Output Voltage	H86453116	12V DC
	H86453122	24V DC
	HM86453418	24V DC
Protection	IP40	
Compliance	EN 61547 EN 61000-3-2 EN 55015 VDE 0875-151 89/336/EEC	

EnerPAX® Power Supplies



Description	Part No.
240V - 12V DC	
240V - 12V DC 10VA	H86453116
240V - 24V DC	
240V - 24V DC 10VA	H86453122
240V - 24V DC 25VA	HM86453418

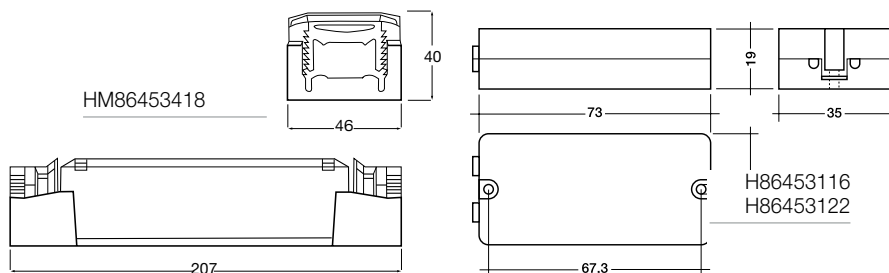

Description	EnerPAX® Halogen Power Supplies A combination of optimum performance in electronics and intelligent processor technology provides high levels of safety, convenience and reliability in the operation of modern Halogen lamps. The life of the lamps can be extended considerably by limiting the starting current, soft starting and providing a constant secondary voltage, independent of the load throughout the entire output range.	
Input Voltage	230/240V AC	
Frequency	50/60 Hz	
Output Voltage	12V AC	
Wattage	105 VA	
Protection	IP40	
Compliance	EN 61547 EN 61000-3-2 EN 55015 VDE 0875-151 89/336/EEC	
Note	This is a double insulated product and the Halogen lights MUST NOT BE EARTHED. <i>This is an AC power supply suitable only for use with Halogen lamps.</i>	



Description	Part No.
250V AC - 12V AC 100VA	HM89400022

