



## PRODUCT NEWS

### HELLA Micro Light Bar and HELLA Mini Light Bar

- Multi-Voltage Input 12 – 24V DC
- User selectable flash patterns (flashing and rotating)
- Amber light output in both clear and amber lenses
- Reverse polarity protection
- Optimally protected against strong vibrations
- Bracket mounting
- Fit and Forget by Design for optimum visibility and safety on Australian roads

## PRODUCT FEATURES


As powerful LED warning lights, HELLA Micro Light Bar and HELLA Mini Light Bar generate an intensive 360-degree warning signal suitable for various applications.

Both products offer different design options and combine a flashing and rotating signal in one unit, while also providing reverse polarity protection. The Micro Light Bar and Mini Light Bar are available in either a clear or amber lens, with amber illumination.




Bracket mounting



# TECHNICAL DETAILS





## Technical data

	Micro Light Bar	Mini Light Bar
Rated voltage	Multi-Voltage	
Operating voltage	10–30V DC	
Current consumption	5.6 A (12 V) 2.7 A (24 V)	6.1 A (12 V) 2.8 A (24 V)
Power consumption	Max. 66W	Max. 70W
Dome and Housing	Polycarbonate	
Connection	500 mm cable	
Light function	Flashing and rotating	
Light source	LED	
Weight	691 g	1,300 g
Temperature range	-40°C to +65°C	
Polarity reversal protection	Yes	
Protection class	IP X7, IP X9K	
EMC protection	ECE-R10, CISPR 25 Class 3 	
Lighting technology homologation	SAE J845 Class 1	



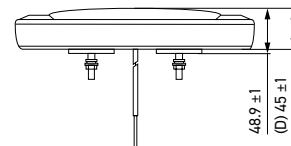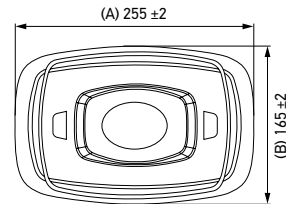

## Dimensional sketches

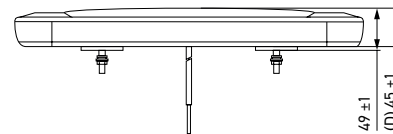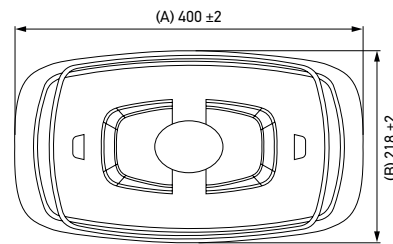

HELLA Micro Light Bar



HELLA Mini Light Bar

Product	Lens	Light output	Voltage	Flash patterns	Mounting	Type approval	Part number
Micro Light Bar 	Clear	Amber	10-30V DC	Flashing and rotating	Bracket	SAE	<b>2RL 014 566-111</b>
Micro Light Bar 	Amber	Amber	10-30V DC	Flashing and rotating	Bracket	SAE	<b>2RL 014 566-311</b>
Mini Light Bar 	Clear	Amber	10-30V DC	Flashing and rotating	Bracket	SAE	<b>2RL 014 565-111</b>
Mini Light Bar 	Amber	Amber	10-30V DC	Flashing and rotating	Bracket	SAE	<b>2RL 014 565-311</b>